



EMME ANTINCENDIO S.r.l.
www.emme-italia.com

18258-3

25 Kg Powder WHEELED FIRE EXTINGUISHER



Note: image is for illustrative purpose only, the product purchased can has some differences

25 Kg powder wheeled fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **EN 1866-1**, approved to European Marine Directive **MED 2014/90/EU**, **S.O.L.A.S.** (Safety of life at sea) '74 (2000), certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.


Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

- **CYLINDER**
Alloy steel, epoxy polyester powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
ABC Powder - MAP 40 %.
- **PROPELLANT**
Dehumidified air or N₂ .
- **VALVE**
2"-F , brass body, lever with red painting Ral 3000.
- **USE**
A B C fire rating (solid materials, flammable liquids, flammable gas).
- **BRACKET**
Chassis on wheels, welded at the cylinder, red painting Ral 3000.

AVAILABLE VERSIONS

N.	CODE	DESCRIPTION
1	16258	25 Kg powder fire extinguisher, complies MED 2014/90/EU

APPROVED/CERTIFIED FIRE EXTINGUISHER:



FIRE RATING :




25 Kg Powder WHEELED FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	A IV B C
EXTINGUISHING AGENT	EPB 0351 (QFIRE-40) ABC powder - MAP 40 %
PROPELLANT	Dehumidified air or N ₂ ,15 Bar at 20°C
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	25 Kg
FULL WEIGHT	~ 48 Kg
DIMENSIONS	Height 930 +/-5 mm Width 420 +/-5 mm Depth 480 +/-5 mm
DISCHARGE TIME	38 sec.
VALVE TIGHTENING TORQUE	Minimum 60 Nm, Maximum 70 Nm
CYLINDER PRESSURE TEST	PT 30 bar
CYLINDER VOLUME	31 L.
SAFETY VALVE	Set 24 +/- 2 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxy polyestere powder painting, Red Ral 3000 colour

PACKAGING


STANDARD : maximum 6 pieces for pallet
Pallet dimensions 100x120x120(h) cm

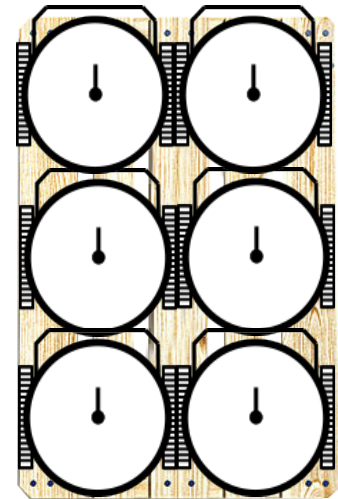

Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover. Maintenance according to the norm in use in utilization country.

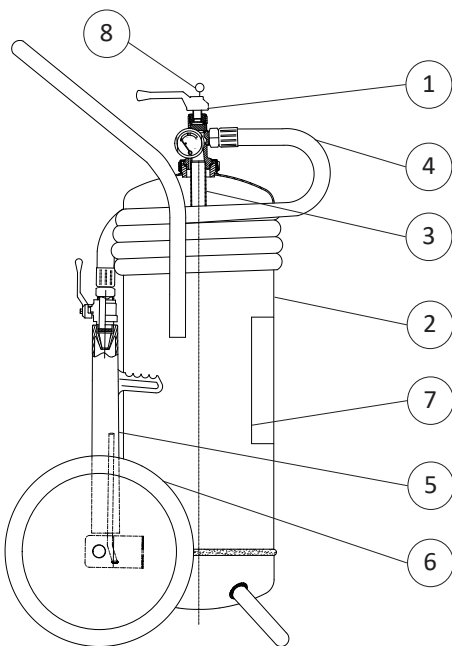

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve 2''-F	0214R
2	Cylinder	18301
3	PVC dip tube	18401
4	Hose	18421
5	Dispensing nozzle (complete of ball valve with control lever)	2181
6	Wheel + wheel stop (diam. 300mm)	0124
7	Label	18351
8	Safety pin	0283R
	Safety valve	0263R
	Safety pin seal	0285
	ABC powder - MAP 40 % (25 Kg recharge)	0351

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_18258-3	18258-3	31/07/19	M.R		2	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545