



PRODUZIONE ESTINTORI D'INCENDIO OMOLOGATI E CERTIFICATI
PRODUCTION OF APPROVED FIRE EXTINGUISHERS

www.emme-italia.com



Data Sheet

Code 19508-1 L 50 Foam Wheeled Fire Extinguisher EN 1866-1
Code 15508-1 Approved European Marine Equipment Directive (MED 96/98/CE)
Fire Rating A IV B



Features

- Manufactured in accordance with and tested EN 1866-1.
- Approved by European Marine Directive MED 96/98/CE
- S.O.L.A.S. (Safety of life at sea) '74 (2000)
- CE marked modul H according to PED 2014/68/EU
- *Quality Product* certification guaranteed by Bureau Veritas Italia
- Pressurized at moment of use with N2 cylinder
- Steel AISI 304 cylinder
- EW-30 Anti-Freeze foam suitable up to temperature of -30°C

It can be used on electrical equipment up to 1000 V voltage.

Suitable on class A fires (combustible materials) and Class B fires (flammable liquids)

- Manufactured in Italy



STAINLESS
INOX
AISI 304 STEEL



File Name	Code	Date	Ceck	Rev.	Pag.
DS_19508-1_18252.Docx19508	19508	16/08/2016	M.P.	0	1/2

EMME ANTINCENDIO S.r.l

Factory: Via del Molino, 40 - 52010 Corsalone (AR) - Italy - Tel. +39.0575.511320
Warehouse: Via G. Di Vittorio, 11 - 20017 Mazzo di Rho (MI) - Italy - Tel. +39.0293900399
E-mail: info@emme-italia.com - milano@emme-italia.com - web site: www.emme-italia.com
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545 -



PRODUZIONE ESTINTORI D'INCENDIO OMOLOGATI E CERTIFICATI
PRODUCTION OF APPROVED FIRE EXTINGUISHERS

www.emme-italia.com



Technical Specifications

Model EN 1866-1	<i>cod. 19508-1</i>
Model MED 96/98	<i>cod. 15508-1</i>
Fire Rating	<i>A IV B</i>
Estinguente	<i>Foam EW-30</i>
Temperature Range	<i>-30°C + 60°C</i>
Propellant	<i>Side Cylinder N2 at 110 Bar</i>
Nominal Charge	<i>L 50</i>
Cylinder Volume	<i>L 60</i>
Discharge Time	<i>40 sec.</i>
Discharge Range	<i>10 m</i>
Hose	<i>EPDM m 5</i>
Cylinder Pressure Test	<i>PT 30 Bar</i>
Cylinder Material	<i>Stainless Steel Aisi 304</i>
External Treatment	<i>Sandblast, epoxypolyestere coating red RAL 3000</i>

Cap 2"	<i>Brass</i>
Safety Valve	<i>22 +/- 2 Bar</i>

Dimensions

Height	1090 mm
Width	480 mm
Depth	480 mm
Full weight	Kg 80
Packaging	100x120x130cm pcs.6

Installation


Do not expose the fire extinguisher to direct sunlight.
A protective Pvc cover is recommended when installed in marine and off-shore environments

Spare Parts List

Pos.	Description	Code
1	Cap 2"	18463
2	Safety Valve	2048
3	Nozzle	18446
4	Hose m 5	18421
5	Wheel d. 300 mm	0124
6	N2 Cylinder	18523
00	Foam EW-30	1624

Optional

Cover pvc	Code 1795
-----------	------------------

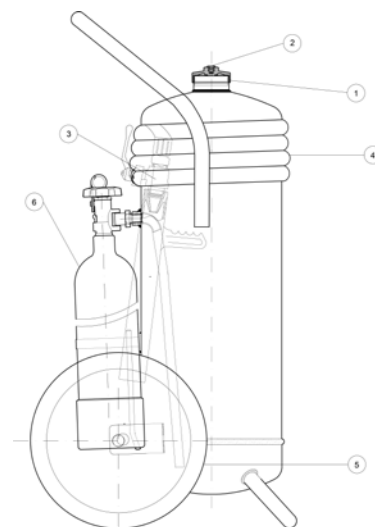

Maintenance

The extinguishers must be inspected and serviced by a TRAINED QUALIFIED PERSON in accordance with the local regulation concerning the inspections of the pressure equipments fire extinguishers. To ensure safe, trouble free performance and long life of the extinguishers, the manufacturer recommends the following: At least every two years replace the extinguishing agent; Inspect the cylinder and valve assembly for any external and internal damage or corrosion. Repair or replace all defective parts using only Manufacturers supplied parts or refills; At least every 12 years from date of manufacture the extinguisher must be overhauled by means of an hydraulic pressure test at the pressure PT stamped on the cylinder, and submitted to a thorough inspection of the cylinder and valve should be made checking for any external or internal damage or corrosion. Any defective parts should be repaired or replaced using the specified parts mentioned in the spare part list.

File Name	Code	Date	Ceck	Rev.	Pag.
DS_19508-1_18252.Docx19508	19508	16/08/2016	M.P.	0	2/2

EMME ANTINCENDIO S.r.l

Factory: Via del Molino, 40 - 52010 Corsalone (AR) - Italy - Tel. +39.0575.511320
Warehouse: Via G. Di Vittorio, 11 - 20017 Mazzo di Rho (MI) - Italy - Tel. +39.0293900399
E-mail: info@emme-italia.com - milano@emme-italia.com - web site: www.emme-italia.com
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545 -