



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

21064-40

6Kg Powder FIRE EXTINGUISHER



CLIP DETAIL



- **CYLINDER**
Deep drawing alloy steel, with clip, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
ABC Powder .
- **PROPELLANT**
Dehumidified air or N2.
- **VALVE**
Lightweight aluminum alloy AA6061 , M 58X2, external check valve, levers with red painting RAL3000.
- **USE**
A B C fire rating
(solid materials, flammable liquids, flammable gas).
- **BRACKET**
Wall-mounted in standard equipment.

6Kg powder fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to EN 3-7:2008, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving voltages of up to 1000 volts.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



43



233



✓

21064-40

6Kg Powder FIRE EXTINGUISHER


TECHNICAL SPECIFICATIONS

FIRE RATING	43 A 233 B C
EXTINGUISHING AGENT	EPB 0351 powder
PROPELLANT	Dehumidified air or N2, 15 Bar at 20°C
TEMPERATURE RANGE	-30°C +60°C
NOMINAL CHARGE	6 Kg
FULL WEIGHT	~ 9,4 Kg
DIMENSIONS	Height 550 mm Diameter 160 mm
DISCHARGE TIME	22 sec.
MAX VALVE TIGHTENING	Between 35 and 45 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	7,8 L.
SAFETY VALVE	Set 20 and 26 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour

PACKAGING


STANDARD :

nr. 44 pieces for box, max 2 boxes for pallet
100x120x130 + 12 pieces in single packaging.
(Tot. 44+44+12 p.)

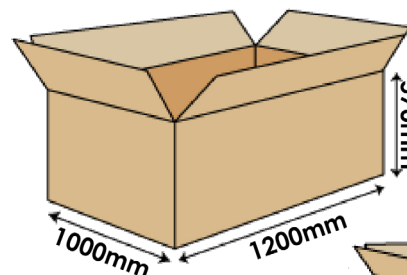


SINGLE PACKAGING
ON REQUEST:

nr. 64 pieces
for pallet 100x120



MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the norm in use in utilization country.

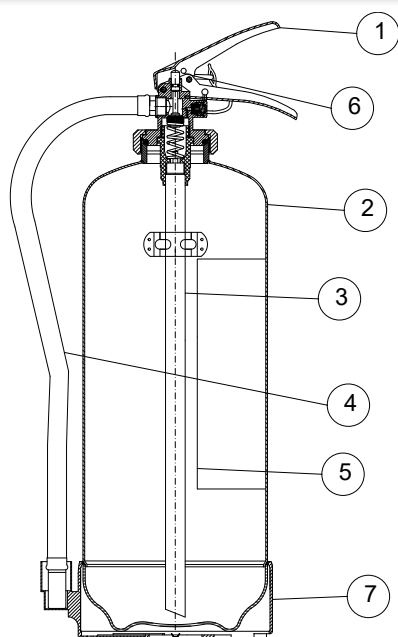

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M 58 X 2	0212-6
2	Cylinder	0104-2
3	PVC dip tube	0154
4	Hose	0292-3
5	Label	0082-4
6	Safety pin	0282-2
7-OPTIONAL	PELD base	1862
	Magnet stop hose	0301-1
	Safety valve	0261-40
	Safety pin seal	0285
	Check valve	1163
	ABC powder	0351
OPTIONAL	Wall-mounted "J bracket"	3036-1

EMME ANTINCENDIO S.r.l

Factory: Via del Molino, 40 – 52010 Corsalone (AR) – Italy – Tel. +39.0575.511320
Warehouse: Via G. Di Vittorio, 11 – 20017 Mazzo di Rho (MI) – Italy – Tel. +39.0293900399
E-mail: info@emme-italia.com – web site: www.emme-italia.com
P.IVA/ C.F. 11208251006 – R.E.A. FI-632545

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_21064-40	21064-40	25/10/17	M.R		1	2