



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

21021-1

2Kg Powder FIRE EXTINGUISHER



- **CYLINDER**
Deep drawing alloy steel, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
ABC powder - MAP 20%.
- **PROPELLANT**
Dehumidified air or N2.
- **VALVE**
Brass M 30X1.5, levers with red painting RAL3000.
- **USE**
A B C fire rating
(solid materials, flammable liquids, flammable gas).
- **BRACKET**
Iron wire in standard equipment.

2Kg powder fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **EN 3-7:2008**, approved to European Marine Directive **MED 2014/90/EU, S.O.L.A.S.** (Safety of life at sea) '74 (2000), certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1000 V, at a minimum distance of 1 mt.

AVAILABLE VERSIONS



N.	CODE	DESCRIPTION
1	26021-2	2kg powder fire extinguisher, complies MED 2014/90/EU

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



13



89



✓

21021-1


2Kg Powder FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	13 A 89 B C
EXTINGUISHING AGENT	EPW 18462 (ABC Favorit Tertia) Powder MAP 20 %
PROPELLANT	Dehumidified air or N2, 15 Bar at 20°C
TEMPERATURE RANGE	-30°C +60°C
NOMINAL CHARGE	2 Kg
FULL WEIGHT	~ 3,7 Kg
DIMENSIONS	Height 380 mm Diameter 110 mm
DISCHARGE TIME	13,5 sec.
VALVE TIGHTENING TORQUE	Minimum 45 Nm, Maximum 68 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	2,5 L.
SAFETY VALVE	Set 20 and 26 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour

PACKAGING


STANDARD :
nr. 8 pieces for box
max 32 boxes for pallet 100x120 (256 p.)

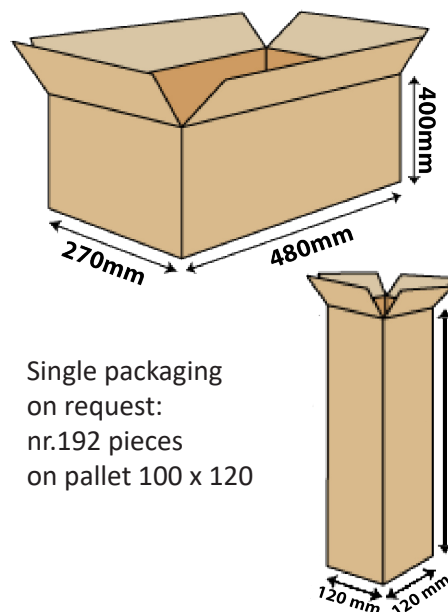

Single packaging
on request:
nr.192 pieces
on pallet 100 x 120

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the norm in use in utilization country.

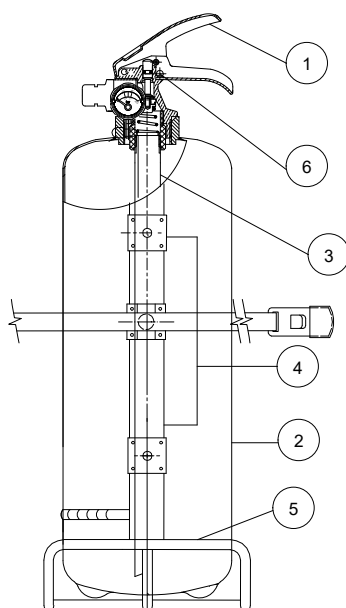

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M 30 X 1.5	0211
2	Cylinder	0102
3	PVC dip tube	0152
4	Label	0052-2
5	Iron wire bracket	0327
6	Safety pin	0281
	Safety valve	0261
	Safety pin seal	0285
	ABC powder MAP 20%	18462

EMME ANTINCENDIO S.r.l

Factory: Via del Molino, 40 – 52010 Corsalone (AR) – Italy – Tel. +39.0575.511320
Warehouse MI: Via G. Di Vittorio, 11 – 20017 Mazzo di Rho (MI) – Italy – Tel. +39.0293900399
Warehouse PD: Via Polonia, 35 – 35127 Padova (PD) – Italy – Tel. +39.049.6453824
E-mail: info@emme-italia.com – web site: www.emme-italia.com
P.IVA/ C.F. 11208251006 – R.E.A. FI-632545

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_21021-1	21021-1	03/01/18	M.R		1	2