



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

22031-1

3 L. Foam FIRE EXTINGUISHER



CLIP DETAIL



- **CYLINDER**
Stainless steel AISI 304, 3 pieces drawing, with clip, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
Water foam.
- **PROPELLANT**
Dehumidified air or N₂.
- **VALVE**
M. 58x2, lightweight aluminum alloy AA6061 body, with external check valve, levers with black painting.
- **USE**
A B F fire rating (solid materials, flammable liquids, cooking oils).
- **BRACKET**
Wall-mounted for valve, in standard equipment.

Note: image is for illustrative purpose only, the product purchased can has some differences

3 L. foam fire extinguisher, temperature range from 0°C to +60°C, manufactured in accordance to **EN 3-7:2008**, approved to European Marine Directive **MED 2014/90/EU**, **S.O.L.A.S.** (Safety of life at sea) '74 (2000), certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.


Suitable for use on fire involving electrical voltages up to 35'000 V, at a distance of 1 mt.

AVAILABLE VERSIONS



N.	CODE	DESCRIPTION
1	27031-1	3 L. foam fire extinguisher, complies MED 2014/90/EU
MED version not includes the wall-mounted bracket for valve (see spare parts list at next page)		

APPROVED/CERTIFIED FIRE EXTINGUISHER:



FIRE RATING :



13



113



40

22031-1


3 L. Foam FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS


FIRE RATING	13 A 113 B 40 F
EXTINGUISHING AGENT	EWAB15 foam (2 % SC 6 + 12 % Inilam AX + 86 % Water)
PROPELLANT	Dehumidified air or N ₂ ,15 Bar at 20°C
TEMPERATURE RANGE	0°C / +60°C
NOMINAL CHARGE	3 L.
FULL WEIGHT	~ 5,7 Kg
DIMENSIONS	Height 445 mm Diameter 130 mm
DISCHARGE TIME	19 sec.
VALVE TIGHTENING TORQUE	Minimum 40 Nm, Maximum 60 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	3,9 L.
SAFETY VALVE	Set between 22 and 27 bar
CYLINDER MATERIAL	Stainless steel AISI 304
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour

PACKAGING

STANDARD : maximum 126 pieces for pallet
(63 pieces for box, max 2 boxes for pallet)
Pallet dimensions 100x120x115(h) cm

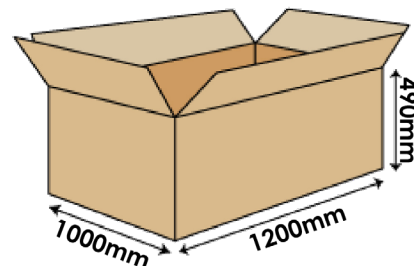

SINGLE PACKAGING
ON REQUEST




Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 58x2	0212-5
2	Cylinder	1583-1
3	PVC dip tube	0152
4	Label 22031-1	1585-1
	Label 27031-1	1684-1
5	Hose with dispensing nozzle	2209-1
6	Stop hose band	1907-3
7	Safety pin	0282-2
	Safety valve	0261-40
	Safety pin seal	0285
	Check valve	1163
	EWAB15 foam (3 L. recharge, ready to use)	2054-2
OPTIONAL	Iron marine bracket red painting	0315
OPTIONAL	Wall-mounted bracket for fire extinguisher with clip, red painting	3036

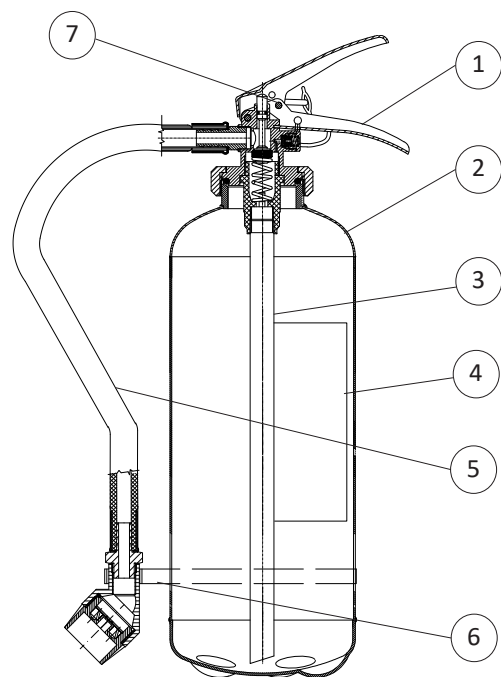

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_22031-1	22031-1	27/12/17	M.R	AA	1	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545