



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

22064

6 L. Foam FIRE EXTINGUISHER



CLIP DETAIL



- **CYLINDER**
Alloy steel, deep drawing, with clip, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
Water foam .
- **PROPELLANT**
Dehumidified air or N₂ .
- **VALVE**
CPF M. 30x1.5, brass body, with anti-corrosion treatment.
- **USE**
A B F fire rating
(solid materials, flammable liquids, cooking oils).
- **BRACKET**
Wall-mounted for valve, in standard equipment.

Note: image is for illustrative purpose only, the product purchased can has some differences

6 L. foam fire extinguisher, temperature range from +5°C to +60°C, manufactured in accordance to **EN 3-7**, approved to European Marine Directive **MED 2014/90/EU, S.O.L.A.S.** (Safety of life at sea) '74 (2000), certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.


Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

AVAILABLE VERSIONS



N.	CODE	DESCRIPTION
1	27064	6 L. foam fire extinguisher, complies MED 2014/90/EU
MED version not includes the wall-mounted bracket for valve (see spare parts list at next page)		

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



43



233



75

22064


6 L. Foam FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS


FIRE RATING	43 A 233 B 75 F
EXTINGUISHING AGENT	EWAB1 foam
PROPELLANT	Dehumidified air or N ₂ ,15 Bar at 20°C
TEMPERATURE RANGE	+5°C / +60°C
NOMINAL CHARGE	6 L.
FULL WEIGHT	~ 9,4 Kg
DIMENSIONS	Height 535 mm Diameter 160 mm
DISCHARGE TIME	21 sec.
VALVE TIGHTENING TORQUE	Minimum 45 Nm, Maximum 68 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	7,5 L.
SAFETY VALVE	Set between 20 and 26 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour/ Internal plastic lining

PACKAGING

STANDARD : maximum 100 pieces for pallet
(44 pieces for box, max 2 boxes for pallet)
(12 pieces in single packaging)
Pallet dimensions 100x120x160(h) cm

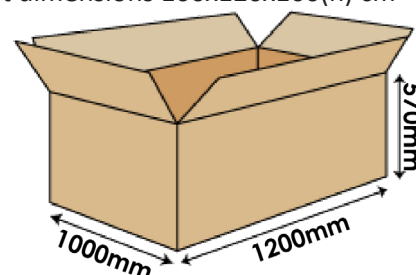SINGLE PACKAGING
ON REQUEST:


- maximum 64 pieces on pallet 100x120 cm
- maximum 48 pieces on pallet 80x120 cm



Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

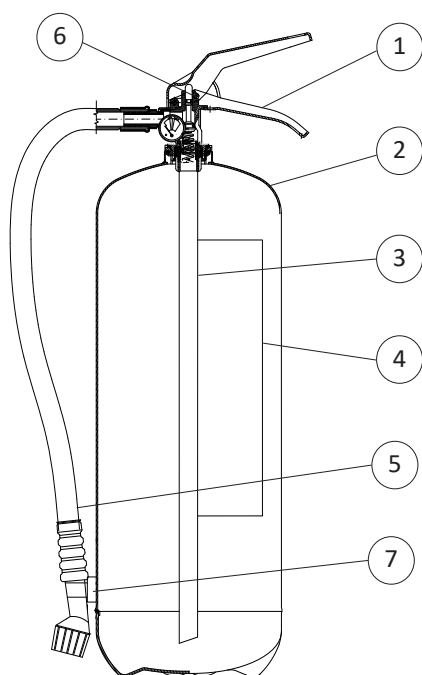

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 30x1.5	0212CS
2	Cylinder	0112-3
3	PVC dip tube	0154
4	Label 22064	0081-1
	Label 27064	1685-1
5	Hose with dispensing nozzle	0293-2
6	Safety pin	0282C
7	Magnet stop hose	0301-1
	Safety pin seal	0285
	EWAB1 foam (6 L. recharge, ready to use)	2054-11
OPTIONAL	Iron marine bracket red painting	0316
OPTIONAL	Stainless steel marine bracket	1464
OPTIONAL	Wall-mounted bracket for fire extinguisher with clip, red painting	3036

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_22064	22064	14/11/17	M.R		1	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545