



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

23020-1

2Kg Co2 FIRE EXTINGUISHER



- CYLINDER
Aluminum alloy AA6061, epoxy polyester powder painting, Red Ral 3000.
- EXTINGUISHING AGENT
Carbon Dioxide 99,99%
- VALVE
CPF M. 25x2, brass body, levers with red painting Ral 3000.
- USE
B fire rating (flammable liquids)
- BRACKET
Wall-mounted for valve, in standard equipment.

Note: image is for illustrative purpose only, the product purchased can has some differences

2Kg Co2 fire extinguisher, temperature range from -20°C to +60°C, manufactured in accordance to **EN 3-7**, approved to European Marine Directive **MED 2014/90/EU, S.O.L.A.S.** (Safety of life at sea) '74 (2000), certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1000 V, at a distance of 1 mt.

AVAILABLE VERSIONS



N.	CODE	DESCRIPTION
1	28020-1	2kg Co2 fire extinguisher, complies MED 2014/90/EU

MED version not includes the wall-mounted bracket for valve (see spare parts list at next page)

APPROVED/CERTIFIED FIRE EXTINGUISHER:



FIRE RATING :



34

23020-1



2Kg Co2 FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	34 B
EXTINGUISHING AGENT	Co2 99,99%
TEMPERATURE RANGE	-20°C +60°C
NOMINAL CHARGE	2 Kg
FULL WEIGHT	~ 5,1 Kg
DIMENSIONS	Height 520 mm Diameter 117 mm
DISCHARGE TIME	7 sec.
VALVE TIGHTENING TORQUE	Minimum 95 Nm, Maximum 130 Nm
CYLINDER PRESSURE TEST	PT 212 bar
CYLINDER VOLUME	3 L.
SAFETY VALVE	Set 195 +15/-23 bar
CYLINDER MATERIAL	Aluminum alloy AA6061
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxy polyestere powder painting, Red Ral 3000 colour

PACKAGING

STANDARD : maximum 80 pieces for pallet
(80 pieces for box, max 1 box for pallet)
Pallet dimensions 100x120x70(h) cm

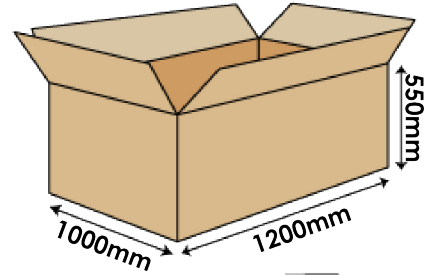


Note: the packaging quantities and measurements are indicative and can be subject at changes

SINGLE PACKAGING
ON REQUEST

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

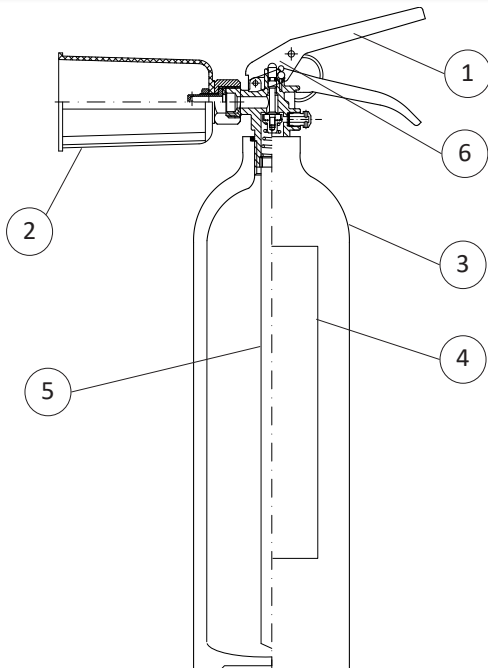

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 25x2	0213C-1
2	Horn	0331-1
3	Cylinder	0107
4	Label 23020-1	0061
	Label 28020-1	0170
5	Aluminum dip tube	0158-1
6	Safety pin	0284
	Safety valve	0262C
	Safety pin seal	0285
OPTIONAL	Iron marine bracket red painting	1238

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_23020-1	23020-1	12/10/17	M.R	AA	1	2

EMME ANTINCENDIO S.r.l.

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545