



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

23020-7

2Kg Co2 FIRE EXTINGUISHER



OPTIONAL



- **CYLINDER**
Alloy steel, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
Carbon Dioxide 99,99%
- **VALVE**
CPF M. 25x2, brass body, levers with red painting Ral 3000.
- **USE**
B fire rating (flammable liquids)
- **BRACKET**
Wall-mounted for valve, in standard equipment.

Note: image is for illustrative purpose only, the product purchased can has some differences

2Kg Co2 fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **EN 3-7:2008**, approved to European Marine Directive **MED 2014/90/EU, S.O.L.A.S.** (Safety of life at sea) '74 (2000), certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1000 V, at a distance of 1 mt.

AVAILABLE VERSIONS



N.	CODE	DESCRIPTION
1	28020-7	2kg Co2 fire extinguisher, complies MED 2014/90/EU
MED version not includes the wall-mounted bracket for valve (see spare parts list at next page)		

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



34

23020-7


2Kg Co2 FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	34 B
EXTINGUISHING AGENT	Co2 99,99%
TEMPERATURE RANGE	-30°C +60°C
NOMINAL CHARGE	2 Kg
FULL WEIGHT	~ 7 Kg
DIMENSIONS	Height 565 mm Diameter 104 mm
DISCHARGE TIME	7,5 sec.
VALVE TIGHTENING TORQUE	Minimum 95 Nm, Maximum 130 Nm
CYLINDER PRESSURE TEST	PT 250 bar
CYLINDER VOLUME	3 L.
SAFETY VALVE	Set 195 +15/-23 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour


PACKAGING

STANDARD : maximum 100 pieces for pallet
(100 pieces for box, max 1 box for pallet)
Pallet dimensions 100x120x75(h) cm

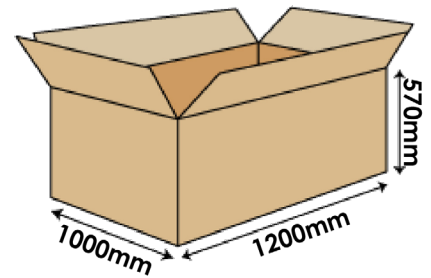


Note: the packaging quantities and measurements are indicative and can be subject at changes

SINGLE PACKAGING
ON REQUEST



MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

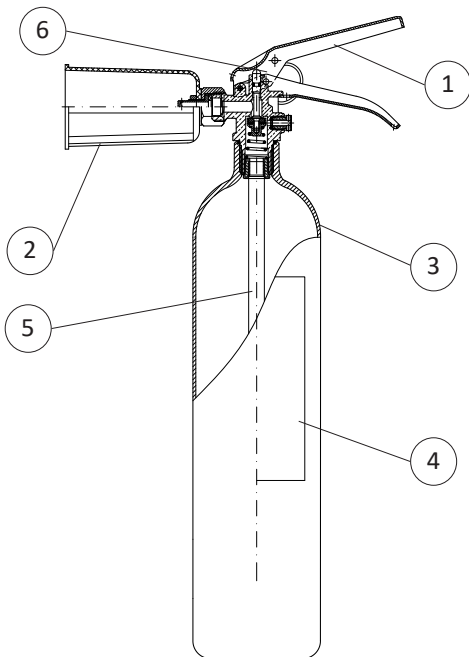

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 25x2	0213C-1
2	Horn	0331-1
3	Cylinder	1884
4	Label 23020-7	2252-1
	Label 28020-7	2252-2
5	Aluminum dip tube	0157-1
6	Safety pin	0284
	Safety valve	0262C
	Safety pin seal	0285
OPTIONAL	Iron ring wall-mounted, red painting, Europe model	1907-1
OPTIONAL	Iron marine bracket red painting	1238-1

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_23020-7	23020-7	12/10/17	M.R	AA	1	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545