



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

23052-7

5Kg Co2 FIRE EXTINGUISHER



OPTIONAL



- **CYLINDER**
Alloy steel, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
Carbon Dioxide 99,99%
- **VALVE**
CPF M. 25x2, brass body, levers with red painting Ral 3000.
- **USE**
B fire rating (flammable liquids)
- **BRACKET**
Wall-mounted for valve, in standard equipment.

Note: image is for illustrative purpose only, the product purchased can has some differences

5Kg Co2 fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **EN 3-7**, approved to European Marine Directive **MED 2014/90/EU, S.O.L.A.S.** (Safety of life at sea) '74 (2000), certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.


Suitable for use on fire involving electrical voltages up to 1000 V, at a distance of 1 mt.

AVAILABLE VERSIONS



N.	CODE	DESCRIPTION
1	28052-7	5kg Co2 fire extinguisher, complies MED 2014/90/EU
MED version not includes the wall-mounted bracket for valve (see spare parts list at next page)		

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



113

23052-7


5Kg Co2 FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	113 B
EXTINGUISHING AGENT	Co2 99,99%
TEMPERATURE RANGE	-30°C +60°C
NOMINAL CHARGE	5 Kg
FULL WEIGHT	~ 13,8 Kg
DIMENSIONS	Height 750 mm Diameter 136 mm
DISCHARGE TIME	15 sec.
VALVE TIGHTENING TORQUE	Minimum 95 Nm, Maximum 130 Nm
CYLINDER PRESSURE TEST	PT 250 bar
CYLINDER VOLUME	7,5 L.
SAFETY VALVE	Set 195 + 15/- 23 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour


PACKAGING

STANDARD : maximum 65 pieces for pallet
(65 pieces for box, max 1 box for pallet)
Pallet dimensions 100x120x100(h) cm

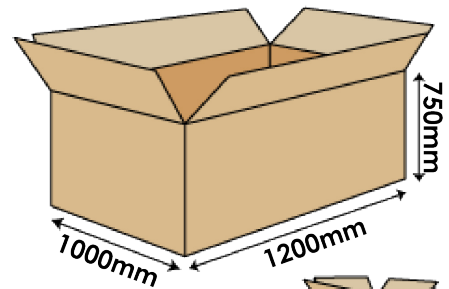


Note: the packaging quantities and measurements are indicative and can be subject at changes

SINGLE PACKAGING
ON REQUEST



MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

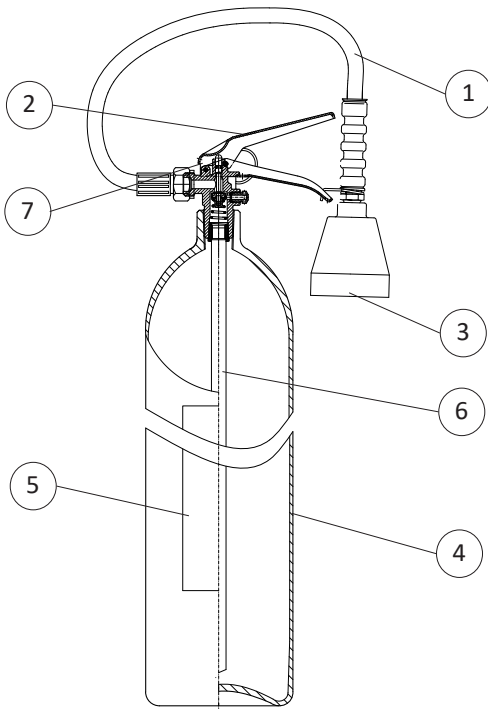

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Hose SAE 100 R1 T ½"	0294
2	Valve M. 25x2	0213C-1
3	Horn	0332
4	Cylinder	0110-1
5	Label 23052-7	0064-7
	Label 28052-7	0064-1
6	Aluminum dip tube	0160-1
7	Safety pin	0284
	Safety pin seal	0285
	Safety valve	0262C
OPTIONAL	Iron marine bracket red painting	0319
OPTIONAL	Stainless steel marine bracket	1465
OPTIONAL	Iron ring wall-mounted, red painting, Europe model	1907-2

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_23052-7	23052-7	12/10/17	M.R	AA	1	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545