



EMME ANTINCENDIO S.r.l.  
www.emme-italia.com

# 22066-5E

## 6 L. Foam FIRE EXTINGUISHER



CLIP DETAIL



- **CYLINDER**  
Alloy steel, deep drawing, with clip, epoxy polyester powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**  
Water foam.
- **PROPELLANT**  
Dehumidified air or N<sub>2</sub>.
- **VALVE**  
CPF M. 30x1.5, brass body, with anti-corrosion treatment.
- **USE**  
A B F fire rating (solid materials, flammable liquids, cooking oils).
- **BRACKET**  
Wall-mounted for valve, in standard equipment.

Note: image is for illustrative purpose only, the product purchased can has some differences

6 L. foam fire extinguisher, temperature range from 0°C to +60°C, manufactured in accordance to **EN 3-7:2008**, certified according to the directive for pressure equipment PED 2014/68/EU. Quality Product certification guaranteed by Bureau Veritas Italia. Suitable for use on fire involving electrical voltages up to 35'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE RATING :**



27

233

40


## 6 L. Foam FIRE EXTINGUISHER

### TECHNICAL SPECIFICATIONS

FIRE RATING	27 A 233 B 40 F
EXTINGUISHING AGENT	EWAB15 foam (2 % SC 6 + 10 % Inilam AX + 88 % Water)
PROPELLANT	Dehumidified air or N <sub>2</sub> , 15 Bar at 20°C
TEMPERATURE RANGE	0°C / +60°C
NOMINAL CHARGE	6 L.
FULL WEIGHT	~ 9,4 Kg
DIMENSIONS	Height 535 mm Diameter 160 mm
DISCHARGE TIME	43 sec.
VALVE TIGHTENING TORQUE	Minimum 45 Nm, Maximum 68 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	7,5 L.
SAFETY VALVE	Set 20 and 26 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxy polyestere powder painting, Red Ral 3000 colour/ Internal plastic lining


### PACKAGING

STANDARD : maximum 100 pieces for pallet  
(44 pieces for box, max 2 boxes for pallet)  
(12 pieces in single packaging)  
Pallet dimensions 100x120x160(h) cm

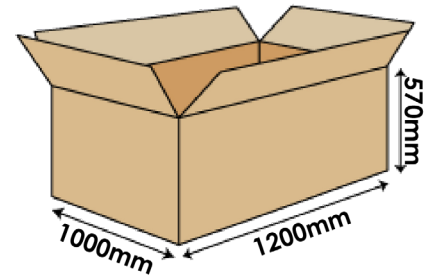

SINGLE PACKAGING  
ON REQUEST:


- maximum 64 pieces on pallet 100x120 cm
- maximum 48 pieces on pallet 80x120 cm



*Note: the packaging quantities and measurements are indicative and can be subject at changes*

### MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

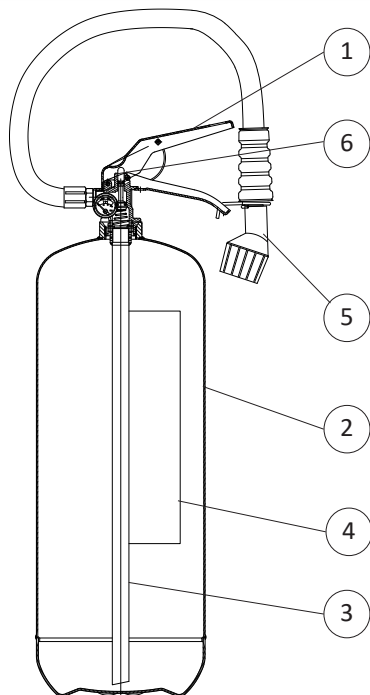

### SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 30x1.5	0212CS
2	Cylinder	0112-3
3	PVC dip tube	0154
4	Label	0083-5
5	Hose with dispensing nozzle	0293
6	Safety pin	0282C
	Safety pin seal	0285
	EWAB15 foam (6 L. Recharge, ready to use)	2054-1
OPTIONAL	Wall-mounted bracket for fire extinguisher with clip, red painting	3036

File name	Code	Date	Rel.	Check	Rev.	Pag.
ds_22066-5E	22066-5E	13/03/19	M.R		2	2

### EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy  
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia  
PIVA/ C.F. 11208251006 - R.E.A. FI-632545