



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

12159

150Kg D Powder WHEELED FIRE EXTINGUISHER



- CYLINDER
Alloy steel, 3 pieces,
epoxypolyestere powder painting,
Red Ral 3000.
- EXTINGUISHING AGENT
D powder.
- PROPELLANT
Fire extinguisher pressurized at
moment of use with 5 Kg Co2 external
cylinder, complete of protection for valve.
- CAP
Brass 2".
- USE
D fire rating
(recommended in environments with
risks arising from the presence of
flammable metal).
- BRACKET
Chassis on wheels, welded at the
cylinder, red painting RAL3000.

© REPRODUCTION IS PROHIBITED

150kg D powder wheeled fire extinguisher, pressurized at moment of use , temperature range from -30°C to +60°C, manufactured in accordance to **EN 1866-1**,certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving voltages of up to 1000 volts.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



12159


150Kg D Powder WHEELED FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	D
EXTINGUISHING AGENT	EPD 0356 powder
PROPELLANT	External cylinder 5Kg Co2
TEMPERATURE RANGE	-30°C +60°C
NOMINAL CHARGE	150 Kg
FULL WEIGHT	~ 210 Kg
DIMENSIONS	Height 1350 mm Width 750 mm Depth 630 mm
DISCHARGE TIME	93 sec.
MAX CAP TIGHTENING	Between 50 and 60 Nm
CYLINDER PRESSURE TEST	PT 30 bar
CYLINDER VOLUME	170 L.
SAFETY VALVE	Set 20 and 21 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour

PACKAGING

STANDARD :
1 piece on pallet 80x120x145

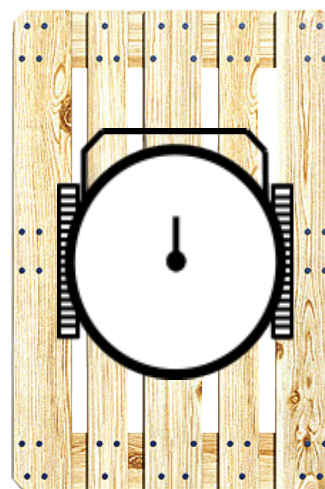


MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover. Maintenance according to the norm in use in utilization country.

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Cap 2"	18463
2	Cylinder	18315
3	External cylinder Co2, complete of protection for valve	-
4	Hose	18422-1
5	Dispensing nozzle (complete of ball valve with control lever)	2181-1
6	Wheel + wheel stop (diam. 400mm)	0125
7	Front wheel (diam. 100mm)	1686
8	Label	1961
OPTIONAL	Supplement safety valve for wheeled fire extinguisher (set 23 and 27 bar)	2048
	D powder	0356

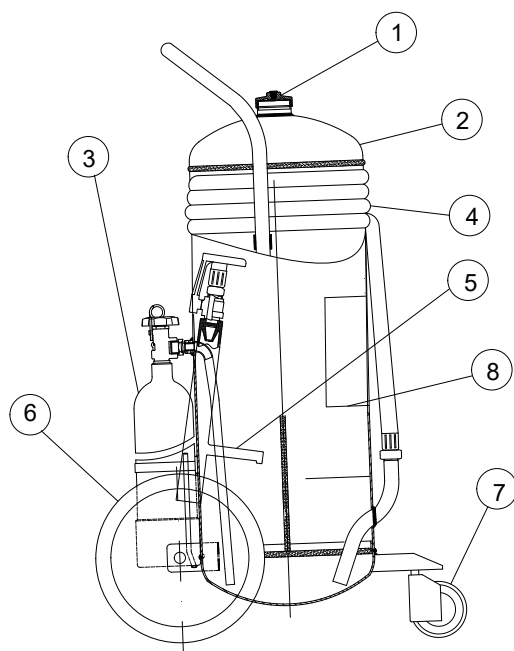

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_12159	12159	23/11/17	M.R	AA	1	2

EMME ANTINCENDIO S.r.l

Factory: Via del Molino, 40 - 52010 Corsalone (AR) - Italy - Tel. +39.0575.511320
 Warehouse MI: Via G. Di Vittorio, 11 - 20017 Mazzo di Rho (MI) - Italy - Tel. +39.0293900399
 Warehouse PD: Via Polonia, 35 - 35127 Padova (PD) - Italy - Tel. +39.049.6453824
 E-mail: info@emme-italia.com - web site: www.emme-italia.com
 P.IVA/ C.F. 11208251006 - R.E.A. FI-632545