



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

20117

100 Kg Powder WHEELED FIRE EXTINGUISHER



- CYLINDER
Alloy steel, epoxypolyestere powder painting, Red Ral 3000.
- EXTINGUISHING AGENT
ABC Powder - MAP 40 %.
- PROPELLANT
Dehumidified air or N₂.
- VALVE
2"-F, brass body, lever with red painting Ral 3000.
- USE
A B C fire rating
(solid materials, flammable liquids, flammable gas).
- BRACKET
Chassis on wheels, red painting Ral 3000.

© REPRODUCTION IS PROHIBITED

Note: image is for illustrative purpose only, the product purchased can has some differences

100 Kg powder wheeled fire extinguisher, temperature range from -20°C to +60°C, manufactured in accordance to **UNI 9492 (D.M. 6.3.92)**, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**




100 Kg Powder WHEELED FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	A B1 C
EXTINGUISHING AGENT	EPB 0351 (QFIRE-40) ABC Powder - MAP 40 %
PROPELLANT	Dehumidified air or N ₂ ,14 Bar at 20°C
TEMPERATURE RANGE	-20°C / +60°C
NOMINAL CHARGE	100 Kg
FULL WEIGHT	~ 155 Kg
DIMENSIONS	Height 1360 mm Width 740 mm Depth 740 mm
DISCHARGE TIME	60 sec.
VALVE TIGHTENING TORQUE	Minimum 60 Nm, Maximum 70 Nm
CYLINDER PRESSURE TEST	PT 30 bar
CYLINDER VOLUME	108 L.
SAFETY VALVE	Set 24 +/- 2 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour

PACKAGING

STANDARD : maximum 2 pieces for pallet
Pallet dimensions 80x120x150(h) cm

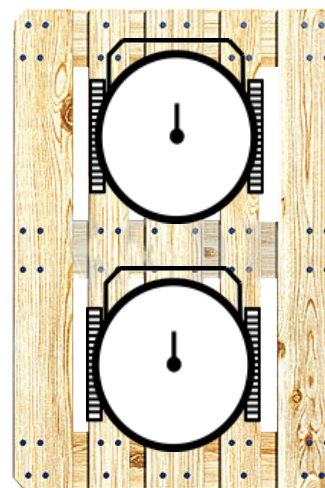


Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover. Maintenance according to the rules in use in utilization country.

SPARE PARTS

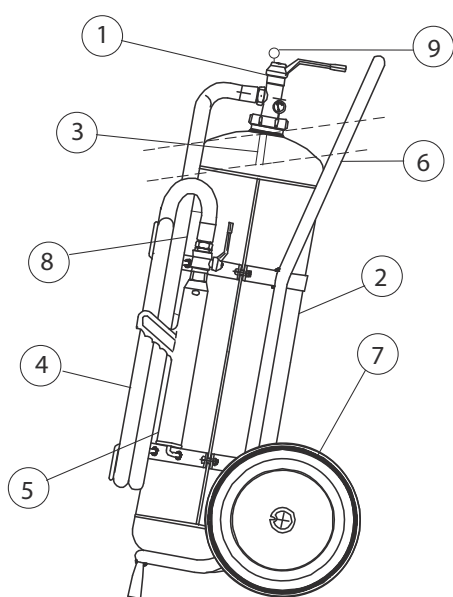

NUMBER	DESCRIPTION	CODE
1	Valve 2"-F	0214R
2	Cylinder	18312
3	PVC dip tube	0165
4	Hose	18422
5	Dispensing nozzle (complete of ball valve with control lever)	2181-1
6	Chassis	0122
7	Wheel + wheel stop (diam. 300mm)	0125
8	Label	0073
9	Safety pin	0283R
	Safety valve	0263R
	Safety pin seal	0285
	ABC powder - MAP 40 % (25 Kg recharge)	0351

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_20117	20117	23/11/17	M.R		1	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545