



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

21010

1 Kg Powder FIRE EXTINGUISHER



- **CYLINDER**
Alloy steel, deep drawing, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
ABC Powder - MAP 40 %.
- **PROPELLANT**
Dehumidified air or N₂.
- **VALVE**
M. 30x1.5, brass body, levers with red painting Ral 3000.
- **USE**
A B C fire rating
(solid materials, flammable liquids, flammable gas).
- **BRACKET**
Iron wire in standard equipment.

Note: image is for illustrative purpose only, the product purchased can has some differences

1 Kg powder fire extinguisher, temperature range from -20°C to +60°C, manufactured in accordance to **EN 3-7**, approved to European Marine Directive **MED 2014/90/EU, S.O.L.A.S.** (Safety of life at sea) '74 (2000), certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.


Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

AVAILABLE VERSIONS



N.	CODE	DESCRIPTION
1	26010	1 Kg powder fire extinguisher, complies MED 2014/90/EU

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**




1 Kg Powder FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	8 A 34 B C
EXTINGUISHING AGENT	EPB 0351 (QFIRE-40) ABC powder - MAP 40 %
PROPELLANT	Dehumidified air or N ₂ ,15 Bar at 20°C
TEMPERATURE RANGE	-20°C / +60°C
NOMINAL CHARGE	1 Kg
FULL WEIGHT	~ 2,1 Kg
DIMENSIONS	Height 338 mm Diameter 85 mm
DISCHARGE TIME	6,5 sec.
VALVE TIGHTENING TORQUE	Minimum 45 Nm, Maximum 68 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	1,25 L.
SAFETY VALVE	Set between 20 and 26 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour

PACKAGING


STANDARD : minimum 10 pieces for box
Maximum 400 pieces for pallet
(40 boxes with 10 pieces each box)
Pallet dimensions 100x120 cm

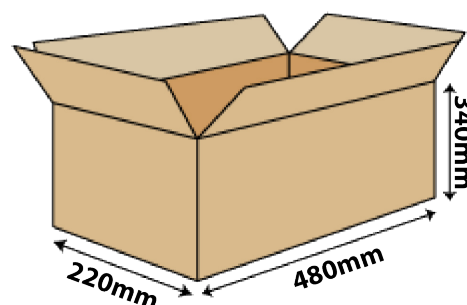

Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

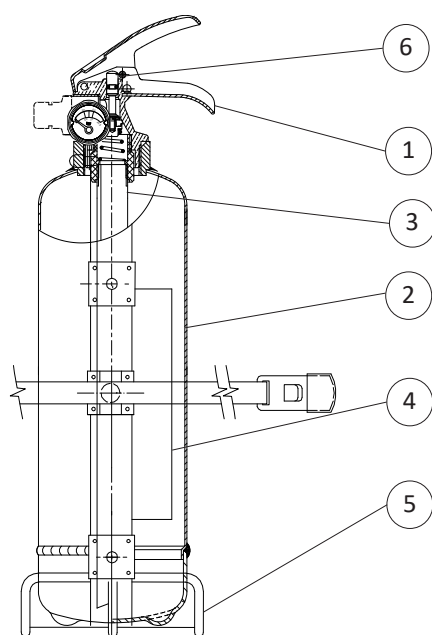

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 30x1.5	0211
2	Cylinder	0101
3	PVC dip tube	0151
4	Label 21010	0051
	Label 26010	0065
5	Iron wire bracket	0326
6	Safety pin	0281
	Safety valve	0261
	Safety pin seal	0285
	ABC powder - MAP 40 % (6 Kg recharge)	0351-1

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_21010	21010	03/01/18	M.R		1	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545