



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

21064-40

6 Kg Powder FIRE EXTINGUISHER



CLIP DETAIL



- **CYLINDER**
Alloy steel, deep drawing, with clip, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
ABC Powder - MAP 40 %.
- **PROPELLANT**
Dehumidified air or N₂.
- **VALVE**
M. 58x2, lightweight aluminum alloy AA6061 body, with external check valve, levers with red painting Ral 3000.
- **USE**
A B C fire rating (solid materials, flammable liquids, flammable gas).
- **BRACKET**
Wall-mounted bracket for fire extinguisher with clip, red painting, in standard equipment.

Note: image is for illustrative purpose only, the product purchased can have some differences
Note: some items in the photo are optional that can be purchased separately (see spare parts)

6 Kg powder fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **EN 3-7:2008**, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



43



233



✓

21064-40


6 Kg Powder FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	43 A 233 B C
EXTINGUISHING AGENT	EPB 0351 (ABC Favorit 111) ABC powder - MAP 40 %
PROPELLANT	Dehumidified air or N ₂ ,15 Bar at 20°C
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	6 Kg
FULL WEIGHT	~ 9,4 Kg
DIMENSIONS	Height 550 mm Diameter 160 mm
DISCHARGE TIME	22,5 sec.
VALVE TIGHTENING TORQUE	Minimum 40 Nm, Maximum 60 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	7,8 L.
SAFETY VALVE	Set between 22 and 27 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour

PACKAGING


STANDARD : maximum 100 pieces for pallet
(44 pieces for box, max 2 boxes for pallet)
(12 pieces in single packaging)
Pallet dimensions 100x120x160(h) cm

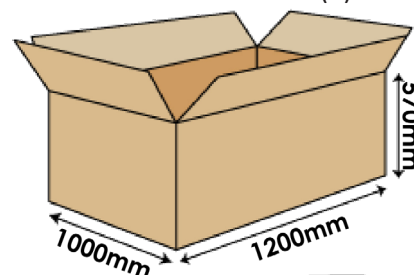

SINGLE PACKAGING

ON REQUEST:


- maximum 64 pieces
on pallet 100x120 cm
- maximum 48 pieces
on pallet 80x120 cm



Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

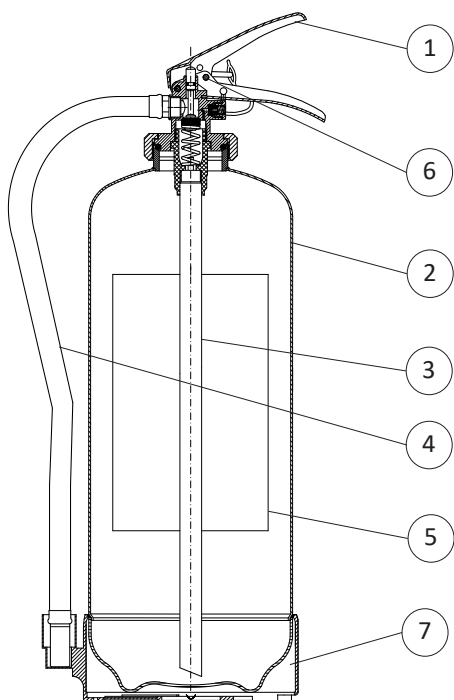

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 58x2	0212-6
2	Cylinder	0104-2
3	PVC dip tube	0154
4	Hose	0292-3
5	Label	0082-4
6	Safety pin	0282-2
7-OPTIONAL	PELD base	1862
	Magnet stop hose	0301-1
	Safety valve	0261-40
	Safety pin seal	0285
	Check valve	1163
	ABC powder - MAP 40 % (6 Kg recharge)	0351-1

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_21064-40	21064-40	25/10/17	M.R		1	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545