



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

21095-5

9 Kg Powder FIRE EXTINGUISHER



- **CYLINDER**
Alloy steel, deep drawing, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
ABC Powder - MAP 20 %.
- **PROPELLANT**
Dehumidified air or N₂.
- **VALVE**
M. 30x1.5, brass body, levers with red painting Ral 3000.
- **USE**
A B C fire rating
(solid materials, flammable liquids, flammable gas).
- **BRACKET**
Wall-mounted for valve, in standard equipment.

Note: image is for illustrative purpose only, the product purchased can has some differences

9 Kg powder fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **EN 3-7:2008**, approved to European Marine Directive **MED 2014/90/EU, S.O.L.A.S.** (Safety of life at sea) '74 (2000), certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.


Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

AVAILABLE VERSIONS



N.	CODE	DESCRIPTION
1	26095-5	9 Kg powder fire extinguisher, complies MED 2014/90/EU
MED version not includes the wall-mounted bracket for valve (see spare parts list at next page)		

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



55



233



✓


9 Kg Powder FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS


FIRE RATING	55 A 233 B C
EXTINGUISHING AGENT	EPW 18462 (ABC Favorit Tertia) ABC powder - MAP 20 %
PROPELLANT	Dehumidified air or N ₂ ,15 Bar at 20°C
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	9 Kg
FULL WEIGHT	~ 14,2 Kg
DIMENSIONS	Height 695 mm Diameter 180 mm
DISCHARGE TIME	23 sec.
VALVE TIGHTENING TORQUE	Minimum 45 Nm, Maximum 68 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	13,7 L.
SAFETY VALVE	Set between 20 and 26 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour

PACKAGING

STANDARD : maximum 40 pieces for pallet
(35 pieces for box, max 1 box for pallet)
(5 pieces in single packaging)
Pallet dimensions 100x120x110(h) cm

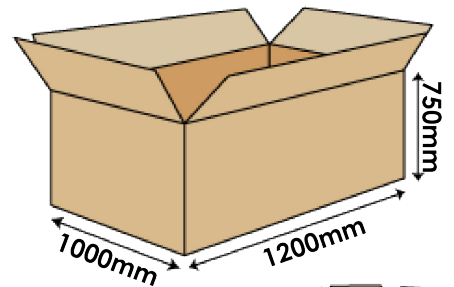SINGLE PACKAGING
ON REQUEST:


- maximum 40 pieces
on pallet 100x120



Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

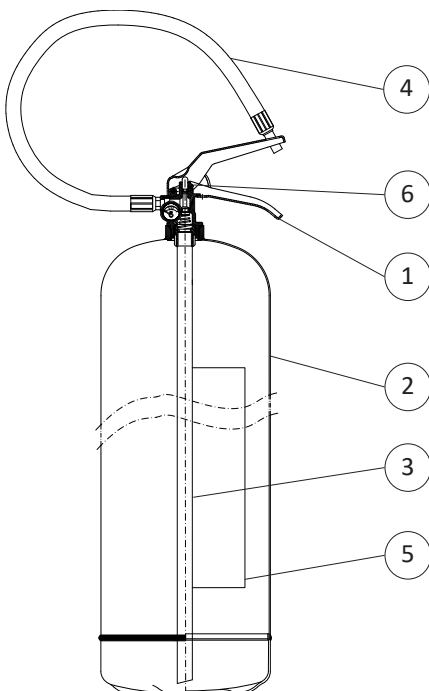

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 30x1.5	0212
2	Cylinder	0106
3	PVC dip tube	0156
4	Hose	0292-4
5	Label 21095-5	0057-5
	Label 26095-5	0176-5
6	Safety pin	0282-1
	Safety valve	0261
	Safety pin seal	0285
	ABC powder - MAP 20 % (9 Kg recharge)	18462-2
OPTIONAL	Iron marine bracket red painting	0318
OPTIONAL	Stainless steel marine bracket	0325

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_21095-5	21095-5	25/10/17	M.R	AA	1	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545