



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

24095

9 Kg Powder FIRE EXTINGUISHER



CLIP DETAIL



- **CYLINDER**
Alloy steel, 3 pieces drawing, with clip, epoxypolyester powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
ABC Powder - MAP 20 %.
- **PROPELLANT**
Fire extinguisher pressurized at moment of use with gr. 200 CO₂ cartridge.
- **VALVE**
M. 74x2, lightweight aluminum alloy, activation with percussion method.
- **USE**
A B C fire rating (solid materials, flammable liquids, flammable gas).
- **BRACKET**
Wall-mounted bracket for fire extinguisher with clip, red painting, in standard equipment.

Note: image is for illustrative purpose only, the product purchased can has some differences

9 Kg powder fire extinguisher, pressurized at moment of use, temperature range from -30°C to +60°C, manufactured in accordance to **EN 3-7:2008**, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER



**FIRE
RATING :**



55



233



✓

24095


9 Kg Powder FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	55 A 233 B C
EXTINGUISHING AGENT	EPW 18462 ABC powder - MAP 20 %
PROPELLANT	Internal cartridge with gr. 200 CO ₂
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	9 Kg
FULL WEIGHT	~ 15 Kg
DIMENSIONS	Height 555 mm Diameter 182 mm
DISCHARGE TIME	24,5 sec.
VALVE TIGHTENING TORQUE	Minimum 40 Nm, Maximum 60 Nm
CYLINDER PRESSURE TEST	PT 30 bar
CYLINDER VOLUME	10,3 L.
SAFETY VALVE	Set 24 +/- 2 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour

PACKAGING


STANDARD : maximum 30 pieces on
pallet 100x120x70(h) cm
in single packaging

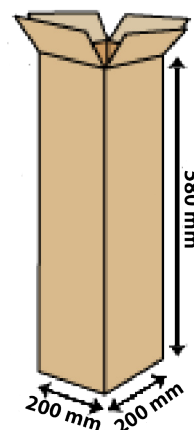

*Note: the packaging quantities and
measurements are indicative
and can be subject at changes*

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

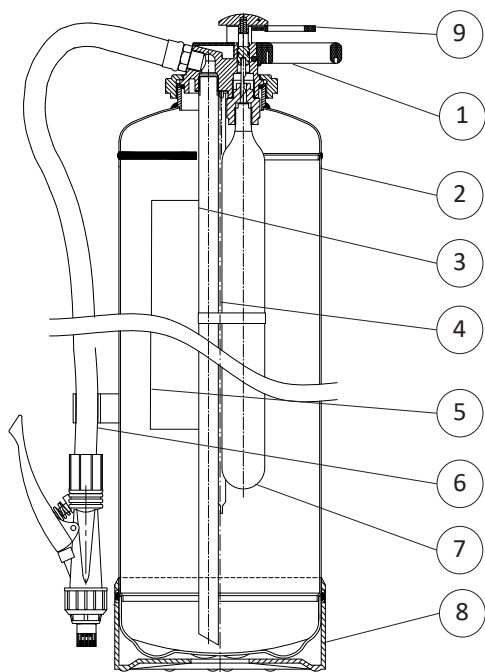

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 74x2	3008-1
2	Cylinder	3009
3	PVC dip tube	3034
4	Pressurization dip tube	3034-1
5	Label	3016-1
6	Hose	3014-1
7	gr. 200 CO ₂ cartridge	3031
8	PELD base	3028
9	Safety pin	0285-1
	Safety pin seal	0285
	ABC powder - MAP 20 % (9 Kg recharge)	18462-2

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_24095	24095	25/10/17	M.R		1	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320
Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545