



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

17304

30kg Co2 WHEELED FIRE EXTINGUISHER



Note: image is for illustrative purpose only, the product purchased can has some differences

30kg Co2 wheeled fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **EN 1866-1**, approved to European Marine Directive **MED 2014/90/EU**, **S.O.L.A.S.** (Safety of life at sea) '74 (2000), certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.


Suitable for use on fire involving electrical voltages up to 1000 V, at a distance of 1 mt.

- **CYLINDER**
Alloy steel, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
Carbon Dioxide 99,99%
- **VALVE**
W 28.8, brass body, red painting Ral 3000, with protection for valve.
- **USE**
B fire rating (flammable liquids)
- **BRACKET**
Chassis on wheels, red painting Ral 3000.

AVAILABLE VERSIONS

N.	CODE	DESCRIPTION
1	14304	30kg Co2 fire extinguisher, complies MED 2014/90/EU

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



233


30kg Co2 WHEELED FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	233 B
EXTINGUISHING AGENT	Co2 99,99%
TEMPERATURE RANGE	-30°C +60°C
NOMINAL CHARGE	30 Kg
FULL WEIGHT	~ 84 Kg
DIMENSIONS	Height 1300 mm Width 450 mm Depth 470 mm
DISCHARGE TIME	28 sec.
VALVE TIGHTENING TORQUE	Minimum 200 Nm, Maximum 300 Nm
CYLINDER PRESSURE TEST	PT 250 bar
CYLINDER VOLUME	40 L.
SAFETY VALVE	Set between 230 and 245 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolystere powder painting, Red Ral 3000 colour

PACKAGING


STANDARD : maximum 6 pieces for pallet
Pallet dimensions 100x120x140(h) cm

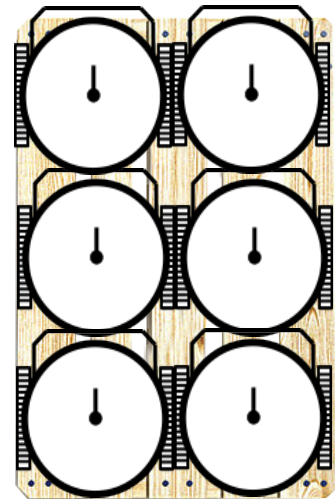

Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover. Maintenance according to the norm in use in utilization country.

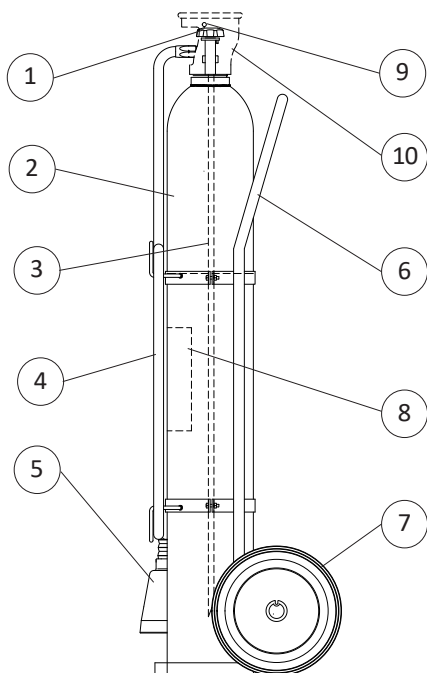

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve W28.8	1153I
2	Cylinder	18299
3	Aluminum dip tube	0167-1
4	Hose sae 100 R1 T1/2"	18425
5	Dispensing nozzle (complete of ball valve with control lever)	0336
6	Chassis	0123
7	Wheel + wheel stop (diam. 300mm)	0124
8	Label 17304	18385
	Label 14304	18385M
9	Safety pin	-
10	Valve protection	18490

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_17304	17304	12/06/19	M.R		1.1	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545