



6 L. Water + Additive FIRE EXTINGUISHER



(R)

- CYLINDER Stainless steel AISI 304, 3 pieces drawing, epoxypolyestere powder painting, Red Ral 3000.
- EXTINGUISHING AGENT Water foam.
- PROPELLANT Dehumidified air or N₂ .
- VALVE
 M. 30x1.5, brass body, levers with red painting Ral 3000.
- USE
 A B fire rating (solid materials, flammable liquids).

Note: image is for illustrative purpose only, the product purchased can has some differences

6 L. water + additive fire extinguisher, temperature range from +5°C to +60°C, manufactured in accordance to **UNI EN 3-7**, certified according to the directive for pressure equipment PED 2014/68/EU. Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:







22062-11

6 L. Water + Additive FIRE EXTINGUISHER


TECHNICAL SPECIFICATIONS

PACKAGING

FIRE RATING	21 A 183 B	STANDARD : maximum 100 pieces for pallet (44 pieces for box, max 2 boxes for pallet) (12 pieces in single packaging) Pallet dimensions 100x120x160(h) cm	
EXTINGUISHING AGENT	99 % Water + 1 % EW-B (orchidee)		
PROPELLANT	Dehumidified air or N_2 ,15 Bar at 20°C		
TEMPERATURE RANGE	+5°C / +60°C		
NOMINAL CHARGE	6 L.	1	
FULL WEIGHT	~ 8,4 Kg		
DIMENSIONS	Height(base-valve) 540 mm Diameter 160 mm		
DISCHARGE TIME	21 sec.	1000mm 1200mm	
VALVE TIGHTENING TORQUE	Minimum 45 Nm, Maximum 68 Nm		
CYLINDER PRESSURE TEST	PT 27 bar	SINGLE PACKAGING ON REQUEST: - maximum 64 pieces	
CYLINDER VOLUME	7,8 L.		
SAFETY VALVE	Set 20 and 26 bar	on pallet 100x120 cm - maximum 48 pieces	
CYLINDER MATERIAL	Stainless steel AISI 304	on pallet 80x120 cm	
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour	Note: the packaging quantities and measurements are indicative and can be subject at changes	

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

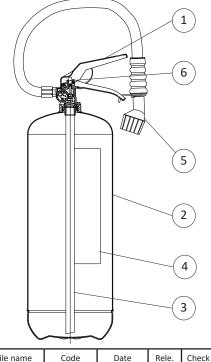

17/04/20

M.R

MR

SPARE PARTS

Rev.

2

Pag.

2

NUMBER	DESCRIPTION	CODE
1	Valve M. 30x1.5	0212F
2	Cylinder	1849
3	PVC dip tube	0154
4	Label	0086-11
5	Hose with dispensing nozzle	0293
6	Safety pin	0282-1
	Safety valve	0261
	Safety pin seal	0285
	Water + additive EW-B (6 L. Recharge, ready to use)	2054-9

EMME ANTINCENDIO S.r.I Via del Molino, 40 - 52010 Corsalone (AR) - Italy info@emme-italia.com - Tel. +39.0575.511320 Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia P.IVA/ C.F. 11208251006 - R.E.A. FI-632545