



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

21065-13

6 Kg Powder FIRE EXTINGUISHER



Note: image is for illustrative purpose only, the product purchased can has some differences

- **CYLINDER**
Stainless steel AISI 304,
3 pieces drawing, epoxypolyestere
powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
ABC Powder - MAP 20 %
- **PROPELLANT**
Dehumidified air or N₂.
- **VALVE**
M. 30x1.5, anti-magnetic type ,
stainless steel levers.
- **USE**
A B C fire rating
(solid materials, flammable liquids,
flammable gas).

ANTI-MAGNETIC
FIRE EXTINGUISHER

© REPRODUCTION IS PROHIBITED

6 Kg powder fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 3-7**, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



55



233



✓


6 Kg Powder FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

| | |
|-----------------------------|---|
| FIRE RATING | 55 A 233 B C |
| EXTINGUISHING AGENT | EPW 18462 ABC powder - MAP 20 % |
| PROPELLANT | Dehumidified air or N ₂ ,15 Bar at 20°C |
| TEMPERATURE RANGE | -30°C / +60°C |
| NOMINAL CHARGE | 6 Kg |
| FULL WEIGHT | ~ 8,5 Kg |
| DIMENSIONS | Height(base-valve) 535 mm Diameter 160 mm |
| DISCHARGE TIME | 18,5 sec. |
| VALVE TIGHTENING TORQUE | Minimum 45 Nm, Maximum 68 Nm |
| CYLINDER PRESSURE TEST | PT 27 bar |
| CYLINDER VOLUME | 7,8 L. |
| SAFETY VALVE | Set between 23 and 29 bar |
| CYLINDER MATERIAL | Stainless steel AISI 304 |
| EXTERNAL/INTERNAL TREATMENT | Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour |

PACKAGING


STANDARD : maximum 100 pieces for pallet
(44 pieces for box, max 2 boxes for pallet)
(12 pieces in single packaging)
Pallet dimensions 100x120x160(h) cm

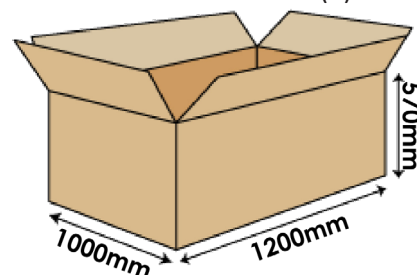

SINGLE PACKAGING

ON REQUEST:


- maximum 64 pieces on pallet 100x120 cm
- maximum 48 pieces on pallet 80x120 cm



Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

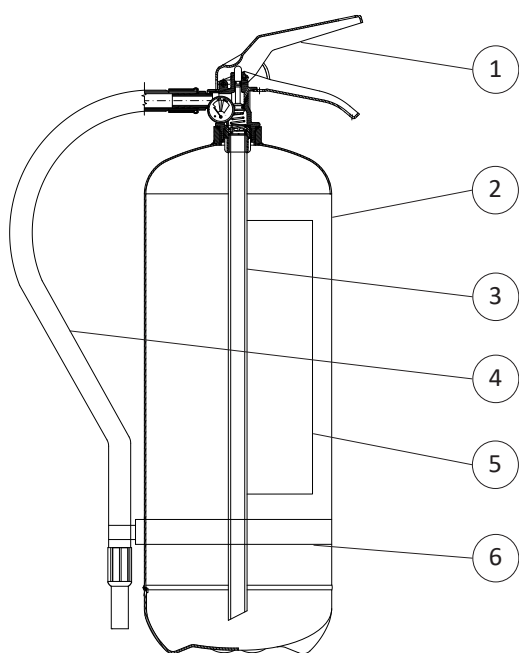

SPARE PARTS

| NUMBER | DESCRIPTION | CODE |
|--------|-----------------|---------|
| 1 | Valve M. 30x1.5 | 0212C-1 |
| 2 | Cylinder | 1849 |
| 3 | PVC dip tube | 0154 |
| 4 | Hose | 0292-2 |
| 5 | Label | 0055-1 |
| 6 | Stop hose band | 1907 |
| | Safety pin seal | 0285 |

| File name | Code | Date | Rele. | Check | Rev. | Pag. |
|-------------|----------|----------|-------|-------|------|------|
| ds_21065-13 | 21065-13 | 06/04/20 | M.R | MR | 2 | 2 |

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545