



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

25124

12 Kg Potassium Bicarbonate Powder FIRE EXTINGUISHER



CLIP DETAIL



- **CYLINDER**
Alloy steel, 3 pieces drawing, with clip, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
BC Powder - Potassium Bicarbonate.
- **PROPELLANT**
Fire extinguisher pressurized at moment of use with gr. 225 CO₂ cartridge.
- **VALVE**
M. 74x2, lightweight aluminum alloy, activation with percussion method.
- **USE**
B C fire rating (flammable liquids, flammable gas).
- **BRACKET**
Wall-mounted bracket for cylinder with clip, red painting, in standard equipment.

© REPRODUCTION IS PROHIBITED

Note: image is for illustrative purpose only, the product purchased can has some differences

12 Kg potassium bicarbonate powder fire extinguisher, pressurized at moment of use, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 3-7**, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



233




12 Kg Potassium Bicarbonate Powder FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	233 B C
EXTINGUISHING AGENT	EPBC 2050 BC powder - Potassium Bicarbonate
PROPELLANT	Internal cartridge with gr. 225 CO ₂
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	12 Kg
FULL WEIGHT	~ 18,7 Kg
DIMENSIONS	Height 610(valve) / 625(hose) mm Diameter(cylinder) 182 mm
DISCHARGE TIME	30 sec.
VALVE TIGHTENING TORQUE	Minimum 40 Nm, Maximum 60 Nm
CYLINDER PRESSURE TEST	PT 30 bar
CYLINDER VOLUME	12,2 L.
SAFETY VALVE	Set 24 +/- 2 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour

PACKAGING


STANDARD : maximum 30 pieces on pallet 100x120x75(h) cm in single packaging

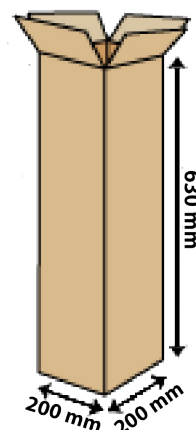

Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

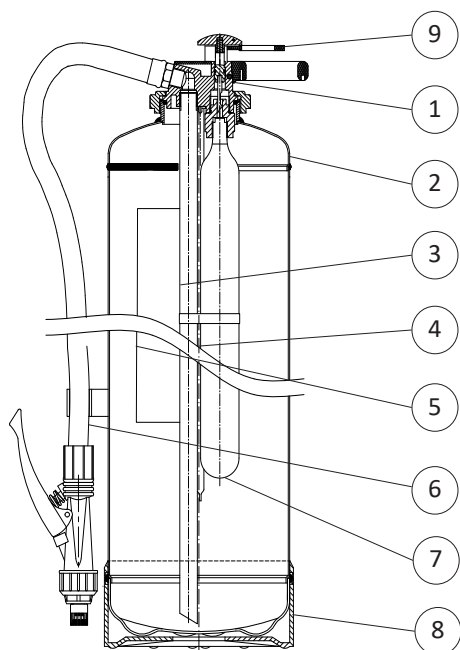

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 74x2	3008-1
2	Cylinder	3012
3	PVC dip tube	3035
4	Pressurization dip tube	3035-1
5	Label	3017
6	Hose	3014-2
7	gr. 225 CO ₂ cartridge	3032
8	PELD base	3028
9	Safety pin	0285-1
	Safety pin seal	0285

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_25124	25124	06/04/20	M.R	MR	2	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
 info@emme-italia.com - Tel. +39.0575.511320
 Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
 P.IVA/ C.F. 11208251006 - R.E.A. FI-632545