



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

20508

50 L. Water + Additive WHEELED FIRE EXTINGUISHER



Note: image is for illustrative purpose only, the product purchased can has some differences

50 L. water + additive wheeled fire extinguisher, temperature range from +5°C to +60°C, manufactured in accordance to **UNI 9492 (D.M. 6.3.92)**, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Not for use on fire involving electrical voltages !

- **CYLINDER**
Stainless steel AISI 304, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
Water + additive .
- **PROPELLANT**
Dehumidified air or N₂ .
- **VALVE**
2"-F , brass body, lever with red painting Ral 3000.
- **USE**
A B fire rating
(solid materials, flammable liquids).
- **BRACKET**
Chassis on wheels, red painting Ral 3000.

© REPRODUCTION IS PROHIBITED

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**




50 L. Water + Additive WHEELED FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

| | |
|-----------------------------|--|
| FIRE RATING | A B4 |
| EXTINGUISHING AGENT | Water + Additive EW6 (AFFF 6%) |
| PROPELLANT | Dehumidified air or N ₂ ,14 Bar at 20°C |
| TEMPERATURE RANGE | +5°C / +60°C |
| NOMINAL CHARGE | 50 L. |
| FULL WEIGHT | ~ 78 Kg |
| DIMENSIONS | Height 1155 mm Width 582 mm Depth 582 mm |
| DISCHARGE TIME | 60 sec. |
| VALVE TIGHTENING TORQUE | Minimum 60 Nm, Maximum 70 Nm |
| CYLINDER PRESSURE TEST | PT 30 bar |
| CYLINDER VOLUME | 62 L. |
| SAFETY VALVE | Set 24 +/- 2 bar |
| CYLINDER MATERIAL | Stainless steel AISI 304 |
| EXTERNAL/INTERNAL TREATMENT | Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour |

PACKAGING


STANDARD : maximum 6 pieces for pallet
Pallet dimensions 100x120x135(h) cm

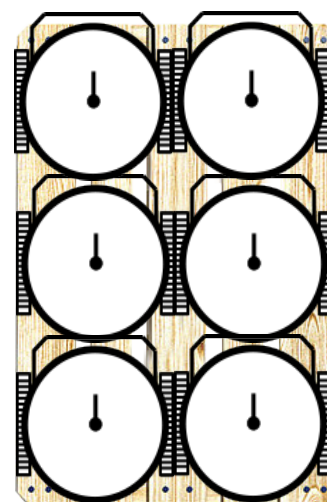

Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover. Maintenance according to the rules in use in utilization country.

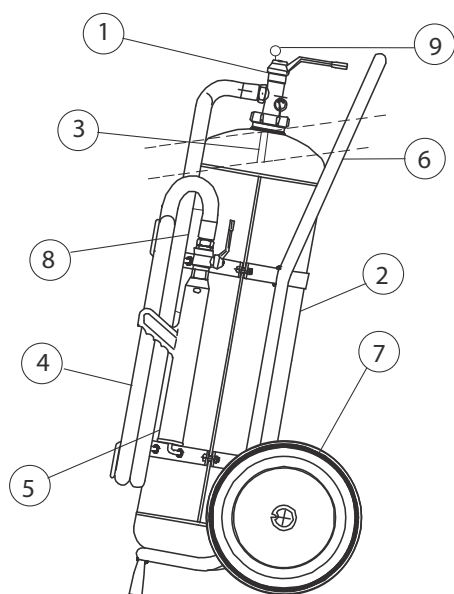

SPARE PARTS

| NUMBER | DESCRIPTION | CODE |
|--------|--|--------|
| 1 | Valve 2"-F | 0214R |
| 2 | Cylinder | 18320 |
| 3 | PVC dip tube | 0162 |
| 4 | Hose | 18421 |
| 5 | Dispensing nozzle (complete of ball valve with control lever) | 2181-2 |
| 6 | Chassis | 0121 |
| 7 | Wheel + wheel stop (diam. 300mm) | 0124 |
| 8 | Label | 0074 |
| 9 | Safety pin | 0283R |
| | Safety valve | 0263R |
| | Safety pin seal | 0285 |

| File name | Code | Date | Rele. | Check | Rev. | Pag. |
|-----------|-------|----------|-------|-------|------|------|
| ds_20508 | 20508 | 23/11/17 | M.R | | 1 | 2 |

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320
Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545