



EMME ANTINCENDIO S.r.l.  
www.emme-italia.com

21031-1

3 Kg Powder FIRE EXTINGUISHER



- **CYLINDER**  
Alloy steel, deep drawing, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**  
ABC Powder - MAP 20 %.
- **PROPELLANT**  
Dehumidified air or N<sub>2</sub> .
- **VALVE**  
M. 30x1.5, lightweight aluminum alloy AA6061 body, levers with red painting Ral 3000.
- **USE**  
A B C fire rating (solid materials, flammable liquids, flammable gas).

Note: image is for illustrative purpose only, the product purchased can has some differences

3 Kg powder fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 3-7 (D.M. 7.1.2005)**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment **PED 2014/68/EU**.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



FIRE RATING :



© REPRODUCTION IS PROHIBITED


## 3 Kg Powder FIRE EXTINGUISHER

### TECHNICAL SPECIFICATIONS


FIRE RATING	13 A 113 B C
EXTINGUISHING AGENT	EPW 18462 (ABC Favorit Tertia) ABC powder - MAP 20 %
PROPELLANT	Dehumidified air or N <sub>2</sub> ,15 Bar at 20°C
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	3 Kg
FULL WEIGHT	~ 5,3 Kg
DIMENSIONS	Height(base-valve) 470 mm Diameter 130 mm
DISCHARGE TIME	15 sec.
VALVE TIGHTENING TORQUE	Minimum 35 Nm, Maximum 55 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	4,3 L.
SAFETY VALVE	Set between 22 and 27 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour

### PACKAGING

STANDARD : maximum 126 pieces for pallet  
(63 pieces for box, max 2 boxes for pallet)  
Pallet dimensions 100x120x115(h) cm

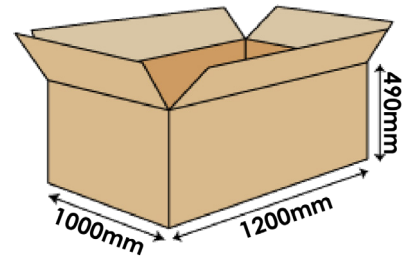


SINGLE PACKAGING  
ON REQUEST

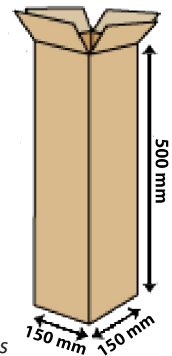

*Note: the packaging quantities and measurements are indicative and can be subject to changes*

### MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

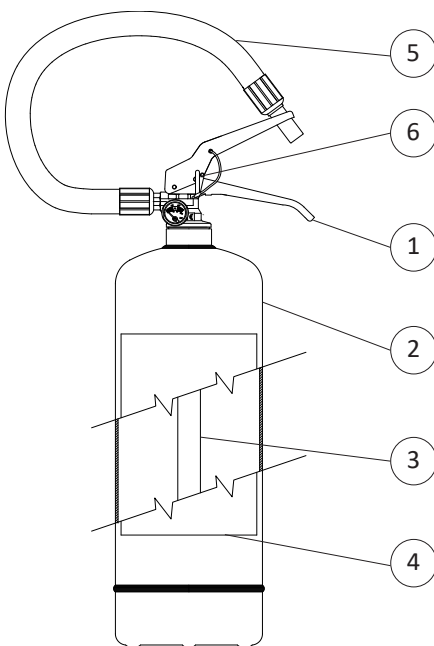

### SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 30x1.5	0212-9
2	Cylinder	0103
3	PVC dip tube	0153
4	Label	0090-1
5	Hose	0291
6	Safety pin	0282-1
	Safety pin seal	0285
OPTIONAL	Iron marine bracket red painting	0315

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_21031-1	21031-1	02/09/20	M.R	MR	3	2

### EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy  
info@emme-italia.com - Tel. +39.0575.511320  
Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia  
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545