

# EMME ANTINCENDIO S.r.l. www.emme-italia.com

# 23058-2

## 5 Kg CO<sub>2</sub> FIRE EXTINGUISHER



Note: image is for illustrative purpose only, the product purchased can has some differences

- CYLINDER
   Aluminum alloy AA6061,
   epoxypolyestere powder painting,
   Red Ral 3000.
- EXTINGUISHING AGENT Carbon Dioxide 99,99%
- VALVE
   Anti-magnetic type M. 25x2, stainless steel levers.
- USE
   B fire rating (flammable liquids)

#### NOTE:

Fire extinguisher manufactured with low magnetic conductivity parts.

© REPROI

5 Kg CO<sub>2</sub> fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 3-7 (D.M. 7.1.2005),** approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:


















# 5 Kg CO<sub>2</sub> FIRE EXTINGUISHER

#### **TECHNICAL SPECIFICATIONS**

FIRE RATING	89 B	
EXTINGUISHING AGENT	Carbon Dioxide 99,99%	
TEMPERATURE RANGE	-30°C / +60°C	
NOMINAL CHARGE	5 Kg	
FULL WEIGHT	~ 12,3 Kg	
DIMENSIONS	Height(base-valve) 670 mm Diameter 152 mm	
DISCHARGE TIME	12,5 sec.	
VALVE TIGHTENING TORQUE	Minimum 95 Nm, Maximum 130 Nm	
CYLINDER PRESSURE TEST	PT 212 bar	
CYLINDER VOLUME	7,5 L.	
SAFETY VALVE	Set at 185 +/- 15 bar	
CYLINDER MATERIAL	Aluminum alloy AA6061	
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere poweder painting, Red Ral 3000 colour	


## **PACKAGING**

STANDARD: maximum 48 pieces for pallet (48 pieces for box, max 1 box for pallet) Pallet dimensions 100x120x100(h) cm



#### **MAINTENANCE AND INSTALLATION**

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

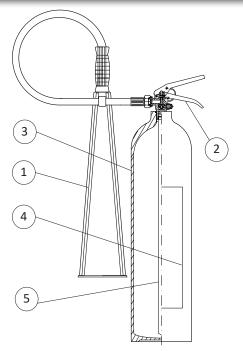

### **SPARE PARTS**

NUMBER	DESCRIPTION	CODE
1	Hose SAE 100 R1 T ½" with horn, Europe model	0332-2
2	Valve M. 25x2	0213-2
3	Cylinder	0109
4	Label	2249
5	Aluminum dip tube	0159-1
	Safety pin seal	0285

#### File name Date Check Rev. Pag. ds\_23058-2 23058-2 08/07/20 2

EMME ANTINCENDIO S.r.I Via del Molino, 40 - 52010 Corsalone (AR) - Italy info@emme-italia.com - Tel. +39.0575.511320 Others Emme Antincendio s.r.l. warehouses in Italy: Milano - Padova - Reggio Emilia P.IVA/ C.F. 11208251006 - R.E.A. FI-632545