



PRODUZIONE ESTINTORI D'INCENDIO OMOLOGATI E CERTIFICATI

PRODUCTION OF APPROVED FIRE EXTINGUISHERS

www.emme-italia.com



BOB - Pneumatic multifunction unit for the testing and drying of firefighting pipe and

Description:

extinguishers max 60 bar


The **BOB** unit allows to perform more activities simultaneously and precisely:

- Water testing firefighting hose and reels;
- Drying hose firefighting;
- Air test to the pressure max 4/6 bar firefighting hose and reels;
- Hydrostatic test on portable powder and foam extinguishers and trolley.

One of the advantages of the unit **BOB** is its operation without the need of electric connections and without having, after, various machineries and bulky equipment, considered the contemporary presence of necessity water for testing, **it's delete in this way any danger from the risk of interaction between electric energy and water.**

BOB in fact, is equipped with a pneumatic piston pump for carry out the testing of the hose and reels only with the help from compressed air and nitrogen, and thanks to his simple system can perform their drying with appropriate sponges, which are expelled and are recoverable through the appropriate "cage" placed laterally.

With the help of accessories supplied on request, can carry out the hydrostatic test on powder and reels portable and on trolley extinguishers. It's realized entirely in **Inox steel** and equipped with two wheels which facilitate the transport on any surface.

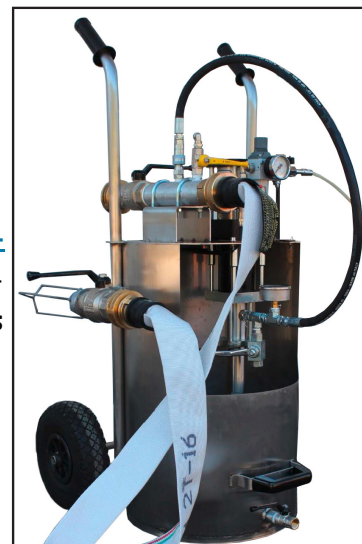

Articles supplied on request:

Art. - KITCA25

Art. - KITCA70

Art. - COL 45

Art. - RC30

Kit for the reels testing UNI25.




Kit for the testing and drying of hose UNI 70.



Collector UNI 45. Kit connection pump-system



Connection for the testing of powder and foam extinguishers M30x1,5

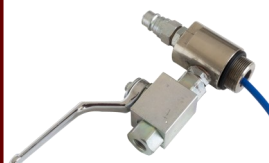

Connection for the testing of powder and foam 2" extinguishers on trolley.



Standard equipment:

- One sponges UNI 45 for the drying;
- One key recovery sponges hydrants
- One key hydrants type A.

Technical information:

- Size: about LxPxH 600x600x1000 mm;
- Weight: 35 Kg;
- Pressure max of testing: 60 Bar;
- Air power supply: 4 Bar max;
- Tank stock water: about lt. 25.



EMME ANTINCENDIO S.r.l

Headquarter: Via del Molino, 40 - 52010 Corsalone (Arezzo) - Italy - Tel. +39.0575.511320

Warehouses: Milano - Padova - Reggio Emilia E-mail: info@emme-italia.com

milano@emme-italia.com - padova@emme-italia.com - reggioemilia@emme-italia.com

P.IVA/ C.F. 11208251006 - R.E.A. FI-632545

ISO 9001
BUREAU VERITAS
Certification



N° IT258822

