



EMME ANTINCENDIO S.r.l.
www.emme-italia.com

22061-1E

6 L. Water FIRE EXTINGUISHER



CLIP DETAIL



- **CYLINDER**
Alloy steel, deep drawing, with clip, epoxy polyester powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
Water .
- **PROPELLANT**
Dehumidified air or N₂ .
- **VALVE**
M. 30x1.5, brass body, levers with red painting Ral 3000.
- **USE**
A fire rating (solid materials).

**WATER DIELECTRIC
FIRE EXTINGUISHER**
*Suitable up to 1'000 V
at a distance of 1 mt.*

© REPRODUCTION IS PROHIBITED


Note: image is for illustrative purpose only, the product purchased can has some differences

6 L. water fire extinguisher, temperature range from +5°C to +60°C, manufactured in accordance to **UNI EN 3-7 (D.M. 7.1.2005)**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment **PED 2014/68/EU**.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



13

22061-1E


6 L. Water FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	13 A
EXTINGUISHING AGENT	Water
PROPELLANT	Dehumidified air or N ₂ , 15 Bar at 20°C
TEMPERATURE RANGE	+5°C / +60°C
NOMINAL CHARGE	6 L.
FULL WEIGHT	~ 9,4 Kg
DIMENSIONS	Height(base-valve) 540 mm Diameter 160 mm
DISCHARGE TIME	22 sec.
VALVE TIGHTENING TORQUE	Minimum 45 Nm, Maximum 68 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	7,5 L.
SAFETY VALVE	Set between 20 and 26 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxy polyestere powder painting, Red Ral 3000 colour/ Internal plastic lining


PACKAGING

STANDARD : maximum 100 pieces for pallet (44 pieces for box, max 2 boxes for pallet) (12 pieces in single packaging)
Pallet dimensions 100x120x160(h) cm

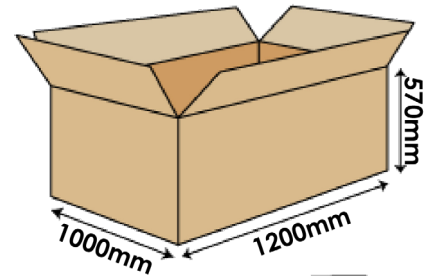

SINGLE PACKAGING ON REQUEST:


- maximum 64 pieces on pallet 100x120 cm
- maximum 48 pieces on pallet 80x120 cm



Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

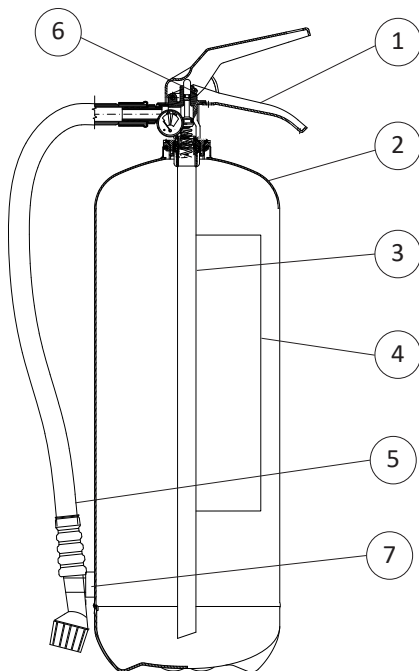

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 30x1.5	0212F
2	Cylinder	0112-3
3	PVC dip tube	0154
4	Label	2242-4
5	Hose with dispensing nozzle	0293-2
6	Safety pin	0282-1
7	Magnet stop hose	0301-1
	Safety valve	0261R
	Safety pin seal	0285
	Water (6 L. recharge, ready to use)	2055-6
OPTIONAL	Iron marine bracket red painting	0316
OPTIONAL	Stainless steel marine bracket	1464
OPTIONAL	Wall-mounted bracket for cylinder with clip, red painting	3036

File name	Code	Date	Rel.	Check	Rev.	Pag.
ds_22061-1E	22061-1E	22/04/20	M.R	MR	2	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545