



EMME ANTINCENDIO S.r.l.
www.emme-italia.com

22063E

6 L. Foam FIRE EXTINGUISHER



CLIP DETAIL




SUITABLE ON
POLAR SOLVENTS


FROST RESISTANCE
(UP TO -30°C)

- CYLINDER
Alloy steel, deep drawing, with clip, epoxy polyestere powder painting, Red Ral 3000.
- EXTINGUISHING AGENT
Water foam.
- PROPELLANT
Dehumidified air or N₂.
- VALVE
M. 30x1.5, brass body, levers with red painting Ral 3000.
- USE
A B F fire rating (solid materials, flammable liquids, cooking oils).

Suitable for use on
Polar Solvents


Note: image is for illustrative purpose only, the product purchased can has some differences

6 L. foam fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 3-7 (D.M. 7.1.2005)**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment **PED 2014/68/EU**.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



FIRE
RATING :



© REPRODUCTION IS PROHIBITED

22063E


6 L. Foam FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	34 A 233 B 75 F
EXTINGUISHING AGENT	EW-30 foam (100 % Premix MG6 -30)
PROPELLANT	Dehumidified air or N ₂ ,15 Bar at 20°C
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	6 L.
FULL WEIGHT	~ 10,4 Kg
DIMENSIONS	Height(base-valve) 540 mm Diameter 160 mm
DISCHARGE TIME	35,5 sec.
VALVE TIGHTENING TORQUE	Minimum 45 Nm, Maximum 68 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	7,5 L.
SAFETY VALVE	Set between 20 and 26 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour/ Internal plastic lining


PACKAGING

STANDARD : maximum 100 pieces for pallet
(44 pieces for box, max 2 boxes for pallet)
(12 pieces in single packaging)
Pallet dimensions 100x120x160(h) cm

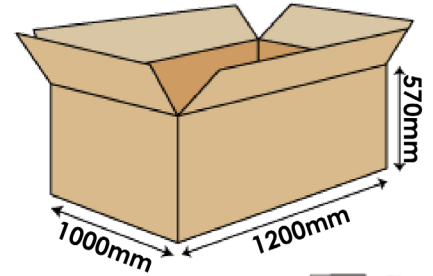

SINGLE PACKAGING
ON REQUEST:


- maximum 64 pieces on pallet 100x120 cm
- maximum 48 pieces on pallet 80x120 cm



Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

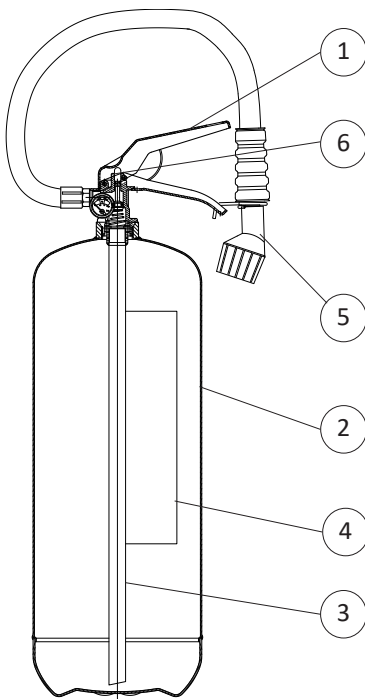

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 30x1.5	0212F
2	Cylinder	0112-3
3	PVC dip tube	0154
4	Label	1577
5	Hose with dispensing nozzle	0293
6	Safety pin	0282-1
	Safety valve	0261R
	Safety pin seal	0285
	EW-30 foam (6 L. recharge, ready to use)	1623
OPTIONAL	Iron marine bracket red painting	0316
OPTIONAL	Stainless steel marine bracket	1464
OPTIONAL	Wall-mounted bracket for cylinder with clip, red painting	3036

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_22063E	22063E	22/04/20	M.R	MR	2	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545