



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

22020

2 L. Foam FIRE EXTINGUISHER




SUITABLE ON
POLAR SOLVENTS


FROST RESISTANCE
(UP TO -30°C)

- **CYLINDER**
Alloy steel, deep drawing, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
Water foam.
- **PROPELLANT**
Dehumidified air or N₂.
- **VALVE**
M. 30x1.5, brass body, levers with red painting Ral 3000.
- **USE**
A B F fire rating (solid materials, flammable liquids, cooking oils).
- **BRACKET**
Iron wire in standard equipment.

*Suitable for use on
Polar Solvents*

Note: image is for illustrative purpose only, the product purchased can has some differences

2 L. foam fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 3-7 (D.M. 7.1.2005)**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.


Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

AVAILABLE VERSIONS



N.	CODE	DESCRIPTION
1	27020	2 L. foam fire extinguisher, complies MED 2014/90/EU

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



8



55



40


2 L. Foam FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS


FIRE RATING	8 A 55 B 40 F
EXTINGUISHING AGENT	EW-30 foam
PROPELLANT	Dehumidified air or N ₂ , 15 Bar at 20°C
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	2 L.
FULL WEIGHT	~ 3,7 Kg
DIMENSIONS	Height 365 mm Diameter 110 mm
DISCHARGE TIME	16,5 sec.
VALVE TIGHTENING TORQUE	Minimum 45 Nm, Maximum 68 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	2,4 L.
SAFETY VALVE	Set between 20 and 26 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyester powder painting, Red Ral 3000 colour/ Internal plastic lining

PACKAGING

STANDARD : minimum 8 pieces for box
Maximum 256 pieces for pallet
(32 boxes with 8 pieces each box)
Pallet dimensions 100x120 cm

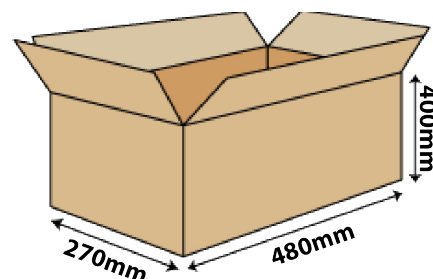


SINGLE PACKAGING
ON REQUEST:
- maximum 192 pieces
on pallet 100x120 cm

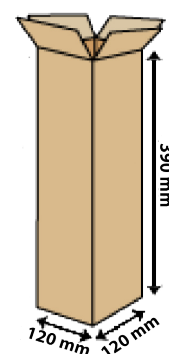

Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

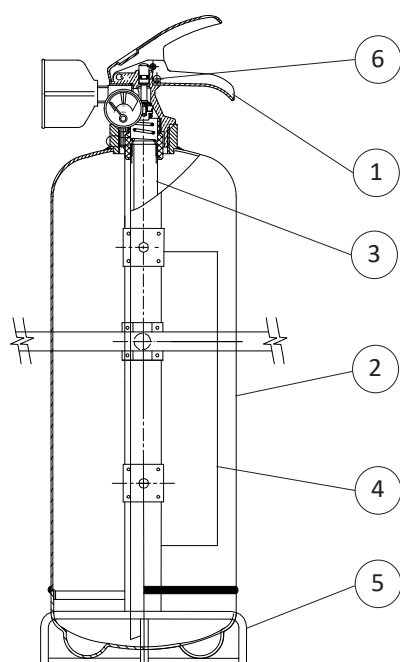

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 30x1.5, with dispensing nozzle for foam	0211-2
2	Cylinder	1579
3	PVC dip tube	1580
4	Label 22020	1581
	Label 27020	1683
5	Iron wire bracket	0327-1
6	Safety pin	0281
	Safety valve	0261
	Safety pin seal	0285
	EW-30 foam (1 L. recharge, ready to use)	1658 x 2

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_22020	22020	07/11/17	M.R	AA	1	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545