



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

23020-8

## 2 Kg CO<sub>2</sub> FIRE EXTINGUISHER



- **CYLINDER**  
Aluminum alloy AA6061, powder painting, Red Ral 3000
- **EXTINGUISHING AGENT**  
Carbon Dioxide 99,99%
- **VALVE**  
CPF M. 25x2, brass body, levers with red painting Ral 3000.
- **USE**  
B fire rating (flammable liquids)


*Note: image is for illustrative purpose only, the product purchased can has some differences*

2 Kg CO<sub>2</sub> fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 3-7 (D.M. 7.1.2005)**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE  
RATING :**



34

© REPRODUCTION IS PROHIBITED

# 23020-8


## 2 Kg CO<sub>2</sub> FIRE EXTINGUISHER

### TECHNICAL SPECIFICATIONS

FIRE RATING	34 B
EXTINGUISHING AGENT	Carbon Dioxide 99,99%
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	2 Kg
FULL WEIGHT	~ 5,1 Kg
DIMENSIONS	Height (base-valve) 505 +/- 5 mm Diameter (cylinder) 117 +/- 2 mm
DISCHARGE TIME	~ 8,1 sec.
VALVE TIGHTENING TORQUE	Minimum 95 Nm, Maximum 130 Nm
CYLINDER PRESSURE TEST	PT 212 bar
CYLINDER VOLUME	3 L.
SAFETY DEVICE	Set at 195 +15/-23 bar
CYLINDER MATERIAL	Aluminum alloy AA6061
EXTERNAL/INTERNAL TREATMENT	Sandblast and powder painting, Red Ral 3000 colour


### PACKAGING

STANDARD : maximum 80 pieces for pallet  
(80 pieces for box, max 1 box for pallet)  
Pallet dimensions 100x120x70(h) cm

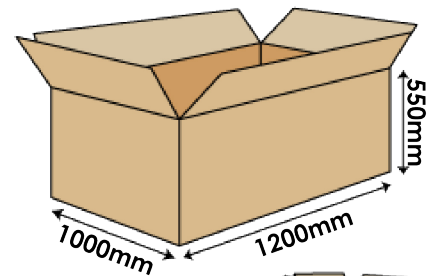


*Note: the packaging quantities and measurements are indicative and can be subject at changes*

SINGLE PACKAGING  
ON REQUEST



### MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

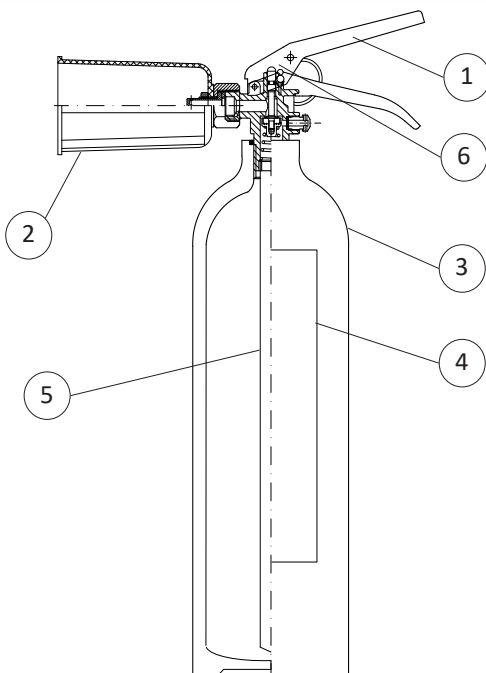

### SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 25x2	0213C-1
2	Horn	0331-1
3	Cylinder	0107
4	Label	2252-8
5	Aluminum dip tube	0158-1
6	Safety pin	0284
	Safety device	0262C
	Safety pin seal	0285
OPTIONAL	Iron marine bracket red painting	1238

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_23020-8	23020-8	09/06/21	M.R	MR	2.1	2

### EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy  
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia  
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545