



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

19508-3

50 L. Foam WHEELED FIRE EXTINGUISHER



FROST RESISTANCE
(UP TO -30°C)

Note: image is for illustrative purpose only, the product purchased can has some differences

50 L. foam wheeled fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 1866-1**, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

- **CYLINDER**
Stainless steel AISI 304, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
Water foam .
- **PROPELLANT**
Dehumidified air or N₂ .
- **VALVE**
2"-F , brass body, lever with red painting Ral 3000.
- **USE**
A B fire rating
(solid materials, flammable liquids).
- **BRACKET**
Chassis on wheels, welded at the cylinder, red painting Ral 3000.

© VIETATA LA RIPRODUZIONE

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**




50 L. Foam WHEELED FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	A IV B
EXTINGUISHING AGENT	EW-30 foam (100 % Aquafilm EXD-30)
PROPELLANT	Dehumidified air or N ₂ ,15 Bar at 20°C
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	50 L.
FULL WEIGHT	~ 76,5 Kg
DIMENSIONS	Height 1100 +/-5 mm Width 490 +/-5 mm Depth 560 +/-5 mm
DISCHARGE TIME	44 sec.
VALVE TIGHTENING TORQUE	Minimum 60 Nm, Maximum 70 Nm
CYLINDER PRESSURE TEST	PT 30 bar
CYLINDER VOLUME	62 L.
SAFETY VALVE	Set 24 +/- 2 bar
CYLINDER MATERIAL	Stainless steel AISI 304
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour

PACKAGING

STANDARD : maximum 6 pieces for pallet
Pallet dimensions 100x120x135(h) cm

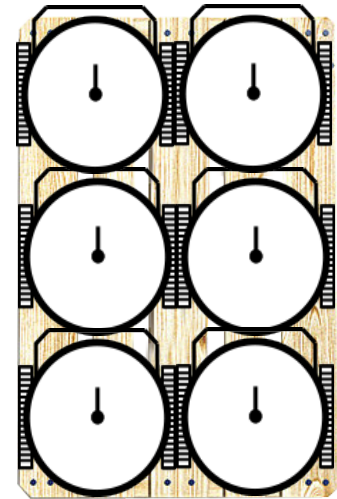


Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover. Maintenance according to the rules in use in utilization country.

SPARE PARTS

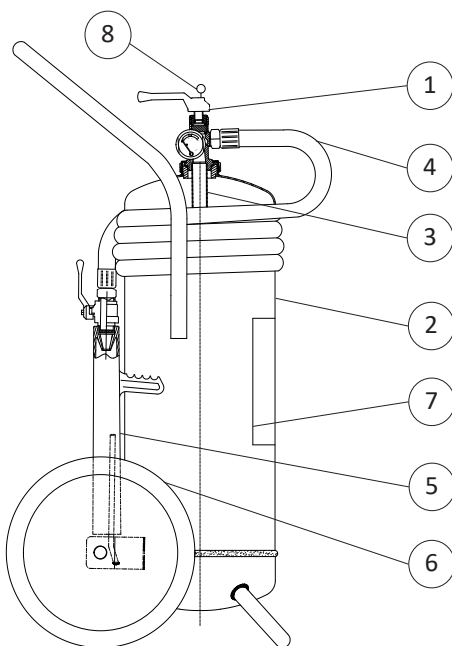

NUMBER	DESCRIPTION	CODE
1	Valve 2"-F	0214R
2	Cylinder	18323
3	PVC dip tube	0162
4	Hose	18421
5	Dispensing nozzle (complete of ball valve with control lever)	2181-2
6	Wheel + wheel stop (diam. 300mm)	0124
7	Label	18375
8	Safety pin	0283R
	Safety valve	0263R
	Safety pin seal	0285
	EW-30 foam (25 L. recharge, ready to use)	1624 x 2

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_19508-3	19508-3	31/03/20	M.R	MR	2	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545