



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

16508-52

50 Kg Powder WHEELED FIRE EXTINGUISHER



- **CYLINDER**
Alloy steel, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
ABC Powder - MAP 40 %.
- **PROPELLANT**
Fire extinguisher pressurized at moment of use with CO₂ external cylinder, complete of protection for valve.
- **CAP**
Brass body, 2".
- **USE**
A B C fire rating
(solid materials, flammable liquids, flammable gas).
- **BRACKET**
Chassis on wheels, welded at the cylinder, red painting RAL3000.

© REPRODUCTION IS PROHIBITED

50 kg powder wheeled fire extinguisher, pressurized at moment of use, temperature range from -30°C to +60°C, manufactured in accordance to **EN 1866-1**, approved to European Marine Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**




50Kg Powder WHEELED FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	A IV B C
EXTINGUISHING AGENT	EPB 0351 (QFIRE-40) ABC Powder - MAP 40 %
PROPELLANT	1,2 Kg of CO ₂
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	50 Kg
FULL WEIGHT	~ 85 Kg
DIMENSIONS	Height 1100 +/-5 mm Width 490 +/-5 mm Depth 560 +/-5 mm
DISCHARGE TIME	~ 50 sec.
CAP TIGHTENING TORQUE	Minimum 60 Nm - Maximum 70 Nm
CYLINDER PRESSURE TEST	PT 30 bar
CYLINDER VOLUME	62 L.
SAFETY DEVICE	Set between 21 and 26 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour

PACKAGING


STANDARD : maximum 4 pieces for pallet
Pallet dimensions 100x120x135(h) cm

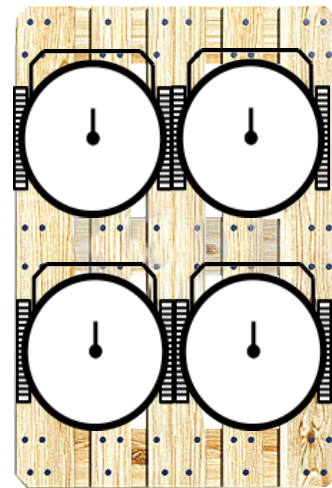

Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover. Maintenance according to the norm in use in utilization country.

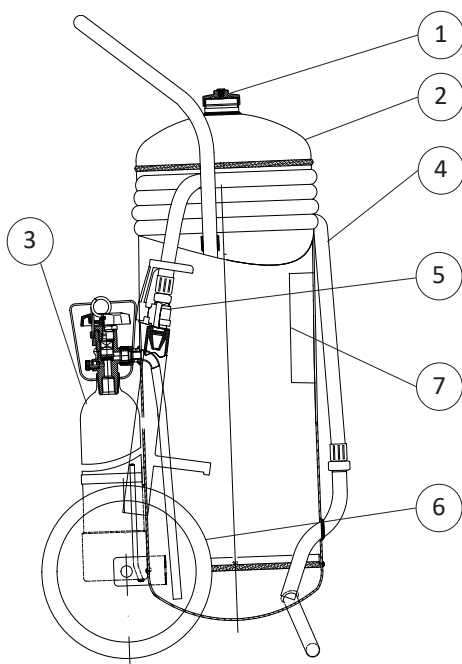

SAPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Brass cap 2"	18463
2	Cylinder	18306
3	External cylinder CO2, complete of protection for valve	18519
4	Hose	18421-3
5	Dispensing nozzle (complete of ball valve with control lever)	2181
6	Wheel + wheel stop (diam. 300mm)	0124
7	Label	18392

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_18508-52	18508-52	22/12/22	M.R		1	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320
Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Roma
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545