

For 50 years your firefighting partner

C O M P A N Y P R O F I L E

www.emme-italia.com

THE COMPANY

Emme Antincendio is an Italian Manufacturer with more than 45 years of experience in the design, production and sale of "made in Italy" certified fire extinguishers, both portable and wheeled, for the industrial and naval sector.

Over the years our Company has developed a complete range of high quality fire protection products, always following the latest technologies in the sector.



THE HISTORY

EMME ANTINCENDIO was founded by Gian Franco Milli and his family in 1973 and has constantly grown, to become, through a network of hundreds of retailers, one of the most dynamic Companies in the field, leader in the Italian market. Over the years it has started a constant territorial expansion with shops in Milan, Padua, Reggio Emilia, Arezzo, Cagliari and Rome. It has also recently increased its production capacity at the headquarters, doubling the space and acquiring a new logistics hub. **EMME ANTINCENDIO** also intends to become an important reality in the world market, counting on a high quality production and equipping its products with the best certifications available today.



THE HISTORY

For over 45 years, Emme Antincendio has been having got the mission of safety and protection, producing a wide range of products with the experience and reliability of an Enterprise that in 1972 was the second to pass the ministerial tests for the approval of its extinguishers. Going back over the past 45 years of history, we can proudly witness the evolution from a mid-production Company to a National and International market leader, thanks to the high level quality, which has never changed in this long period.





EMME ANTINCENDIO TODAY

Currently the Company has a production area of over 5000 square meters, an area for storage of raw materials of about 2000 mq located at 3km from the main office and various outlets spread throughout the territory. EMME ANTINCENDIO was founded and developed with the intention of producing fire extinguishers without compromise of quality and always observing the highest production standards. This has led to investments in new models, specifically approved for the foreign market.



EMME ANTINCENDIO TODAY

- **Headquarter:**
 - Emme Antincendio S.r.l. Via del Molino, 40 52010 - Corsalone - Chiusi della Verna - Arezzo
 - **Milan store:**
 - Via Giuseppe di Vittorio 11, 20017 Mazzo di Rho - MAILAND
 - **Padova store:**
 - Via Polonia, 35 - 35127 PADOVA
 - **Arezzo store:**
 - Via L. Galvani, 69 - 52100 AREZZO
 - **Roma store:**
 - Via Amaseno, 22- 00131 ROMA
 - **Cagliari store:**
 - Via Cettolini, 29 – 09030 Elmas, CAGLIARI
-



EMME ANTINCENDIO TODAY

Thanks to our partners and customers we cover the full National territory and thanks to our stores we offer not only a logistic service but also support to our customers.

Our stores have been designed and developed not only as a store for the collection of material in immediate delivery but above all as a reference point for the maintenance technician to be able to solve everyday problems in their work .



EMME ANTINCENDIO TODAY

Together with our partners and customers, Emme Antincendio Srl exports its product to over 3 continents in the world including:

- France
 - Germany
 - Belgium
 - Denmark
 - Poland
 - Great Britain
 - Latvia
 - Morocco
 - Serbia
 - Australia
 - Qatar
 - Emirates
 - And many others
-



EMME ANTINCENDIO TODAY

OMOLOGATIONS

MORE THAN

200

CERTIFIED FIRE

EXTINGUISHERS





**Research, innovation and
quality**

CERTIFICATIONS

Emme Antincendio Srl is a Company certified in accordance with ISO 9001 by Bureau Veritas Italia spa. Our quality system provides controls at all steps of production :

- From receiving raw materials with instrumental and documentary controls
- To the stage of shipment and packaging of the individual product

The quality control of raw materials is carried out by qualified and trained personnel. He complies with the company criteria dictated by the technical and qualitative standards required to ensure a quality product to the consumer.



CERTIFICATIONS

ACCREDIA
Ente di Attestazione Italiana

Bureau Veritas Italia SpA s.p.a.
Nathco Italy under the number 1370

BUREAU VERITAS

CERTIFICATO DI APPROVAZIONE DEL SISTEMA DI QUALITÀ
CERTIFICATE OF QUALITY SYSTEM APPROVAL

N° CE-1370-PED-H-EMM 001-21-ITA

Bureau Veritas Italia SpA, agendo nell'ambito della politica (funzioni dell'organismo notificato 1370) attesta che il sistema di qualità applicato dal fabbricante per la progettazione, la produzione, l'ispezione finale e le prove all'attrezzatura a pressione certificata di seguito è stato esaminato secondo le prescrizioni del modulo H dell'Allegato III della direttiva e Attestazione a Pressione n. 2014/68/UE ed è conforme alle disposizioni della stessa.

Bureau Veritas Italia SpA, acting within the scope of its notification number 1370, attests that the quality system reported by the manufacturer for design, manufacturing, final product inspection and testing of the pressure equipment certified pursuant to the provisions of the pressure equipment Directive 2014/68/EU, was found to satisfy the provisions of the relevant rules apply to it.

| | |
|--|---|
| Fabbricante (Nome) / Applicant (Company): | EMME ANTINCENDIO S.R.L. |
| Incarico / Designation: | MAI F. GIACOMO MAI s.p.a. s.r.l. 50151, FIRENZE, Italy |
| Nome e Indirizzo commerciale: Trading Name - Address: |  |
| Descrizione dell'attrezzatura / Equipment description: | INSIEMI ESTINTORI PORTATILI CARRELLATI N° CAT. III |
| Identificazione delle attrezzature (o elenco allegato ove necessario): Identification of equipment (or annex if necessary): | VEDI LISTA ALLEGATA (SEE ATTACHED LIST OF PRODUCT IN THE ANNEX) |
| Esistenza di un allegato al certificato Existence of an annex to the certificate | Vedere Allegato (See Annex) |

Questo certificato scade il 1 (gg/mm/aaaa): 08/07/2024

L'approvazione è subordinata agli obblighi di sorveglianza, visite, prove e verifiche condotte da Bureau Veritas Italia SpA che ha stipulato un contratto con il fabbricante, in base alle disposizioni della direttiva e del regolamento.

The approval is subject to the obligations of surveillance, visits, tests and verifications carried out by Bureau Veritas Italia SpA which has entered into a contract with the manufacturer, in accordance with the provisions of the Directive and the Regulation.

Questo certificato è secondo l'uso del fabbro che si è impegnato a mantenere e a porre a disposizione del suo utilizzo, qualora questi non rispettasse gli obblighi necessari per mantenere il controllo con Bureau Veritas Italia SpA in base alle disposizioni della direttiva e del regolamento, per mantenere la validità del controllo con la sua documentazione tecnica e la sua organizzazione, e se il fabbricante non rispettasse tale obbligo, Bureau Veritas Italia SpA non può essere considerata responsabile per la sua attività.

This certificate is according to the use of the manufacturer who has committed to maintain and to make available for its use, in the event that it does not comply with the obligations necessary to maintain the control with Bureau Veritas Italia SpA in accordance with the provisions of the Directive and the Regulation, to maintain the validity of the control with its technical documentation and its organization, and if the manufacturer does not comply with this obligation, Bureau Veritas Italia SpA cannot be considered responsible for its activity.

| | | | | |
|------------------|------------------------------------|---|------------------------------|---|
| Paese Country | Il fabbricante The manufacturer | Approvato e Registrato in Approved and Registered in | Terminato da Completed by | Il nota autorizzato dell'organismo notificato n. 1370 The authorized note of the notified body n. 1370 |
| MILANO | 08/07/2024 | Italy | MAI F. GIACOMO MAI |  |

Contatto al Registro n. 1370-001-21-ITA

Il presente documento è valido e soggetto a termini della Condizione Generale di Vendita allegata al contratto firmato tra le parti.

This document is valid and subject to the terms of the General Conditions of Sale attached to the contract signed between the parties.

In 2015, For the production of portable and mobile fire extinguishers, Emme Antincendio Srl decided to voluntarily undergo the control of a third-party certification body, for its production process through an internal specification. In this way, it guarantees its supply of extinguishing agents exclusively from European territory and ensures that all production takes place exclusively in the production lines of the headquarters located in Italy.




CERTIFICATIONS

For the PED certification according to directive 2014/68/EU Emme Antincendio Srl has chosen the total quality system of the product according to the module H certified by Bureau Veritas Italia.

A large part of the production is also certified for the naval sector according to MED 2014/90/EU.

MED certified products are guaranteed by third part certification body CSI spa.



CERTIFICATIONS

Since 2012 Emme Antincendio has started a certification process of its entire product range according to current regulations:

- EN 3/7:2008 for portable fire extinguishers
- UNI EN 3-10: Factory Production Control System (FPC), certified by Bureau Veritas Italia according to the requirements of the UNI EN 3-10 standard
- EN 1866-1:2008 for mounted fire extinguishers

The new certifications are all carried out at laboratories accredited on European territory:

MPA Dresden – Germany

Apragaz – Belgium

MTIC - Italy





THE HEADQUARTER

The headquarter is located in the heart of Tuscany in the province of Arezzo, in the National Park of the Casentino Forests. The Milli family, very close to their territory, decided to preserve the Company's origins, leaving the production and offices where our history started.

The bond with the territory and the surrounding environment has always characterized the Company in its choices by developing products as compatible with the environment and reducing the environmental impact of the production itself.



FACTORY

Over the years, the bureau has been constantly improved in all areas, from work comfort for the employee to the structure, providing the necessary technologies to improve the business lifestyle in all sectors.

In the course of 2015 the intense activities of widening started, dedicating a new plant to the department warehouse and shipments equipped of new offices for commercial and technical field




FACTORY

The realization of a new dedicated factory, has given the possibility to invest on the production installing two new certified for enterprise 4.0. machines in the productive line.

The first machine installed is dedicated entirely to the production of fire extinguishers with powder extinguishing agent, equipped with automation for the assembly of the valve body.



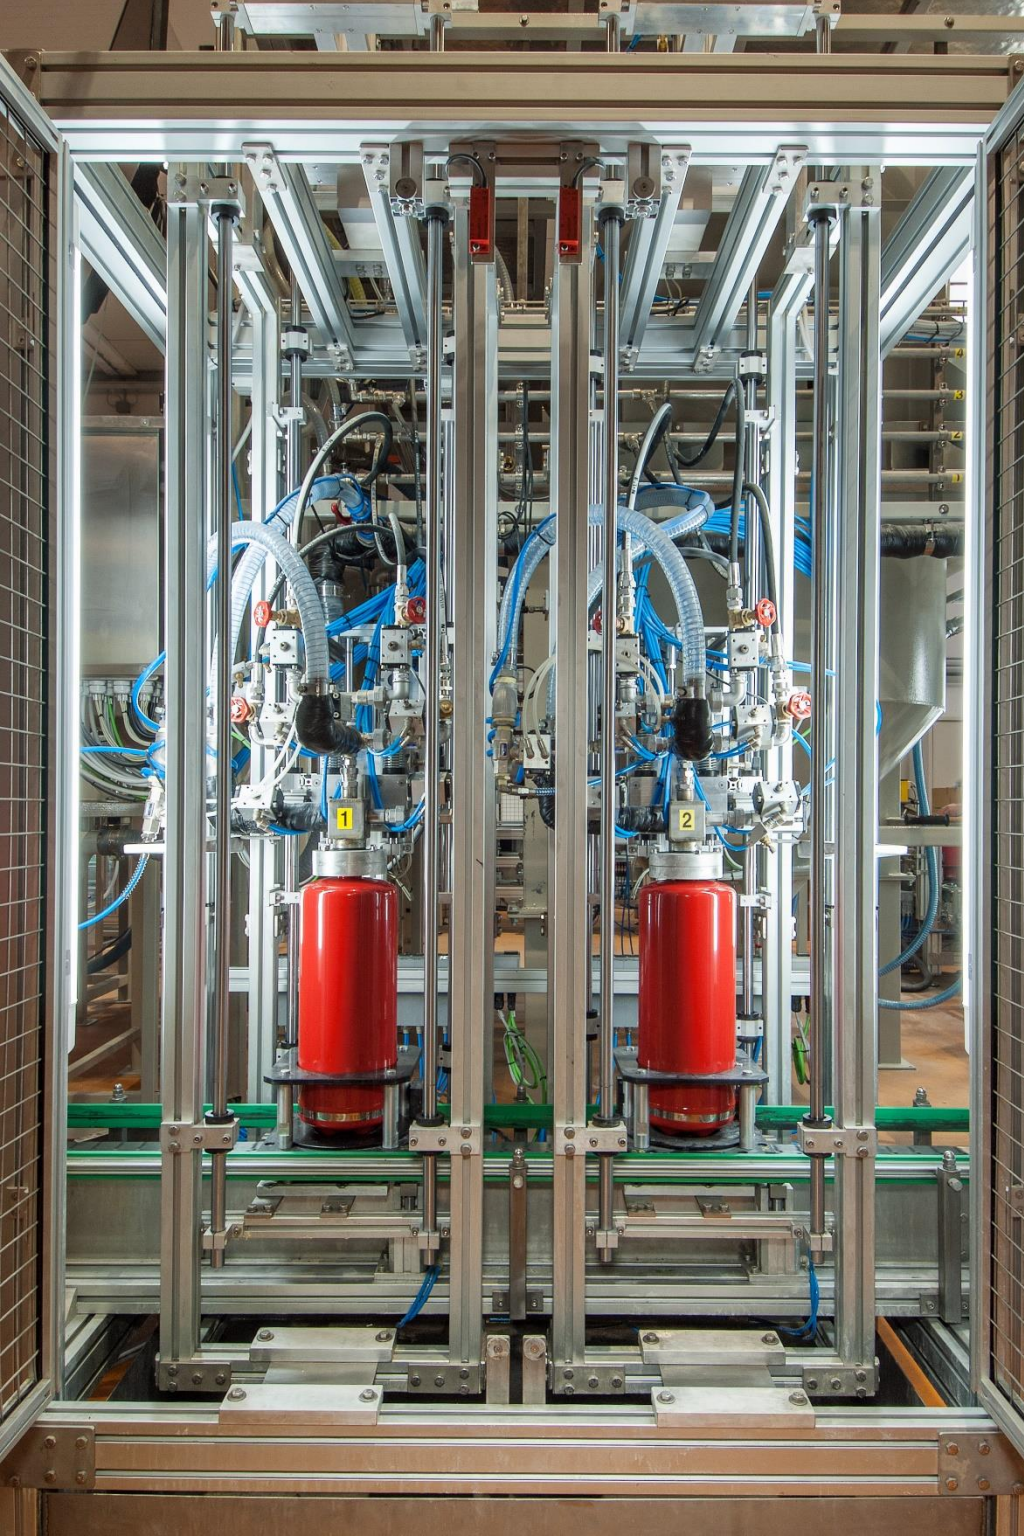

FACTORY

The second machine installed in 2019 is a machine made to measure by our requests e for the first time a HYBRID machine has been realized that allows to use only assembly line both for extinguishers with powder extinguishing agent and for water-based fire extinguishers

The construction of this machinery HYBRID was strongly desired by the property because we believe in the spread of the extinguishing agent based on water as indicated by recent ministerial decrees (Fire Prevention Code n.d.r.) and the strict requirements of the European market.



FACTORY

Each production line is periodically checked by qualified personnel to maintain efficiency and guarantee the quality of the finished product thanks to repeated daily checks to verify the calibration of control systems, scales, clamping and pressure.

All production lines are equipped with electronic sensors to control any loss of nitrogen pressure directly in the pressurization phase.



FACTORY

To guarantee the quality of the product offered to all our customers, we have invested in a specific OSMOSIS treatment for water, which we use in the production of all fire extinguishers with water-based extinguishing agent.

This system allows the quality of the water used in filling the fire extinguishers to be free of impurities and any organic substances present in the water that affect the performance characteristics of the additives used.



BRANCH OFFICES

- - Our offices in Milan, Padua , Reggio Emilia, Cagliari and Rome are a point of reference for customers in all nearby areas, always guaranteeing the availability of the main materials and a support point for all eventualities which, thanks to our qualified staff, are able to manage and find solutions according to every need.
- - Each location has a fully equipped room for both theoretical and practical training courses.





OUR PRODUCT RANGE



POWDER FIRE EXTINGUISHERS

All production lines are equipped with two silos for the storage of the extinguishing powder, in order to have control of the specific extinguishers for the production model, necessary to achieve the product complies with current regulations, through internal traceability processes



Il tuo produttore di estintori portatili polvere ABC



21010-1 21021-1

CAPACITA' 1 KG - 2 KG
CLASSE DI FUOCO
8A 34B C - 13A 89B C
TEMPERATURA -30°C / +60°C
VALVOLA M30 OTTONE



21031-1 21042-1

CAPACITA' 3 KG - 4 KG
CLASSE DI FUOCO
13A 113B C - 21A 183B C
TEMPERATURA -30°C / +60°C
VALVOLA M30 ALLUMINIO



21063-59 21063-55

CAPACITA' 6 KG
CLASSE DI FUOCO
34A 233B C
TEMPERATURA -30°C / +60°C
VALVOLA M30 OTTONE



21063-51

CAPACITA' 6 KG
CLASSE DI FUOCO
34A 233B C
TEMPERATURA -30°C / +60°C
VALVOLA M30 ALLUMINIO



21063-50 21063-54

CAPACITA' 6 KG
CLASSE DI FUOCO
34A 233B C
TEMPERATURA -30°C / +60°C
VALVOLA M30 OTTONE



21063-40 21064-40

CAPACITA' 6 KG
CLASSE DI FUOCO
34A 233B C - 43A 233B C
TEMPERATURA -30°C / +60°C
VALVOLA M58 ALLUMINIO



21064-2

CAPACITA' 6 KG
CLASSE DI FUOCO
43A 233B C
TEMPERATURA -30°C / +60°C
VALVOLA M30 OTTONE



21064-3

CAPACITA' 6 KG
CLASSE DI FUOCO
43A 233B C
TEMPERATURA -30°C / +60°C
VALVOLA M30 ALLUMINIO



21065-3

CAPACITA' 6 KG
CLASSE DI FUOCO
43A 233B C
TEMPERATURA -30°C / +60°C
VALVOLA M30 OTTONE



21095-4 21095-7

CAPACITA' 9 KG
CLASSE DI FUOCO
55A 233B C
TEMPERATURA -30°C / +60°C
VALVOLA M30 OTTONE - M30 ALL



21125-2

CAPACITA' 12 KG
CLASSE DI FUOCO
55A 233B C
TEMPERATURA -30°C / +60°C
VALVOLA M30 OTTONE



24063-3

CAPACITA' 6 KG
CLASSE DI FUOCO
34A 233B C
TEMPERATURA -30°C / +60°C
VALVOLA M74 ALLUMINIO



24095

9 KG
55A 233B C



24125

12 KG
55A 233B C



Fuochi di classe A - Fuochi di SOLIDI

Generati da combustibili solidi, con formazione di braci con l'esclusione dei metalli. In questa classe rientrano i fuochi generati da materiali quali il legno, la carta, i materiali tessili, le pelli, la gomma.



Fuochi di classe B - Fuochi di LIQUIDI

Generati da combustibili liquidi e da solidi liquefatti. In questa classe rientrano i fuochi generati da materiali quali l'alcool, i solventi, gli oli minerali, gli idrocarburi, la benzina.



Fuochi di classe C - Fuochi di GAS

Generati da combustibili gassosi. In questa categoria rientrano i fuochi generati da metano, butano, idrogeno, acetilene, propilene.



Dielettrici

fino a 1'000 V,
alla distanza minima
di 1 metro

Per visionare la gamma completa ed avere maggiori dettagli sul singolo prodotto visitare il sito www.emme-italia.com e consultare la relativa scheda tecnica

EMME ANTINCENDIO S.r.l.

Via del Molino, 40 - 52010 Corsione (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320



The wide range of Powder Extinguishers allows all our customers to choose and evaluate which fire extinguisher is best suited to their needs.

CLEAN AGENT

The extinguishing agent FK-5-1-12 is a unique product of its kind and offers safety, low environmental impact and an extraordinary extinguishing power.

It represents a valid alternative to Halon and HFC.

- 0 ozone depletion potential (ODP)
- Low global warming (GWP) = 1
- Average life in atmosphere of 5 days (ALT)
- Large safety margin for occupied areas

Temperature range from -30 ° to + 60 °, manufactured in accordance with the UNI EN 3-7 standard, certified according to the PED 2014/68 / EU directive for pressure equipment. Bureau Veritas certified. It can be used on electrical equipment up to 1000v.



WATER FIRE EXTINGUISHER

The production line for water fire extinguishers uses foaming additives taken directly from the manufacturer's 1,000-liter tank.

Through a series of steel pipes, these additives enter the dosing system without coming into contact with possible impurities that could affect product quality. The accounting in grams through the computerized system guarantees a constant quantity of foaming agent throughout the production cycle through our mixtures with specific proportions of each component:

- OSMOSI internally treated water
- Class A additive
- Class B additive





ESTINTORE 6 L ACQUA

Codice 22061-1



Dielettrico

fino a 1'000 V, alla
distanza minima di 1 m.

Secondo il Codice di
Prevenzione Incendi è
consigliato utilizzare
estintori a base d'acqua
all'interno dei luoghi chiusi
limitando possibili danni
dovuti dall'utilizzo di
estintori sugli occupanti

Tempi di Revisione UNI 9994:2013

...il primo cambio estinguente
va effettuato dopo ben 4 ANNI

Perchè sceglierlo ?

ESTINGUENTE NATURALE

Solo acqua iperfiltrata
(nessun additivo aggiunto)

...di conseguenza...


Non crea rifiuto e quindi
nessun costo di smaltimento

A IMPATTO ZERO

Non inquina, non sporca,
non lascia residui.
Non arreca nessun fastidio
alle persone e all'ambiente,
sia durante che dopo l'utilizzo.
Garantisce una perfetta
visibilità durante tutta la fase
di scarica e non satura l'aria
presente nell'ambiente.



Idoneo per fuochi generati
da combustibili solidi
(metalli esclusi)



certificato
MED 2014/90/UE

Omologato dal
Ministero dell'Interno
(D.M. 07/01/2005)

N. omologazione:
DCPREV. U. 0018160
del 31/12/2018

Dettagli Normativi

Il D.Lgs 81/08 prevede, per tutte
le attività lavorative (uffici,
negozi, automezzi, ecc...) non
soggette al campo di
applicazione del DPR 151,
l'installazione di protezioni
antincendio se presente almeno
un lavoratore dipendente.
Anche i mezzi di trasporto
aziendali si configurano come
luogo di lavoro e quindi devono
essere dotati di un sistema di
protezione contro gli incendi.
(estintore ad esempio)

...inoltre...

l'estintore ad acqua è
raccomandato dalla circolare
dei VVF del 14 agosto 2018
relativa alle attività di
accertamento dell'idoneità
tecnica dei lavoratori.

Caratteristiche principali

Classe di Fuoco: 13 A
Estinguente: Acqua iperfiltrata
(nessun additivo aggiunto)
Temperatura: +5°C / +60°C
Peso Totale: ~ 9,4 Kg
Serbatoio: In lega di
acciaio ad alta resistenza,
con trattamento interno di
plastificazione.
Colore rosso RAL3000.
Valvola: M.30x1.5,
specificata per estintori idrici

Per visionare la gamma completa ed avere maggiori dettagli sul singolo prodotto visitare il sito www.emme-italia.com e consultare la relativa scheda tecnica

EMME ANTINCENDIO S.r.l.
Via del Molino, 40 - 52010 Consiliana (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320



ECO-FOAM FOR LITHIUM-ION BATTERY

The world is changing fast and it is essential for us to keep up with the times.

Emme Antincendio Srl is pleased to inform all its collaborators of a great novelty. We will soon start the production of a unique product and the first in its category in Italy to be homologated:

A new model of portable 6 L foam ABF tested on lithium battery with power 750 W/h.

Effective up to cold temperatures and suitable for a wide range of uses.

Double certified according to UNI EN 3-7 for both land and naval use.

In addition, the production process complies with production controls according to EN 3-10, which makes us even more proud.



EFFECTIVE UP TO COLD
TEMPERATURES AND
SUITABLE FOR A WIDE
RANGE OF USES.

Technical specifications:

- **FIRE RATING:** 27 A 233 B 40 F
- **EXTINGUISHING AGENT:** Foam extinguisher EWAB15 (2 % SC-6 + 10 % Inilam AX + 88 % Water)
- **PROPELLANT:** Dehumidified air or N₂, 15 Bar to 20°C
- **TEMPERATURE RANGE:** 0°C / +60°C
- **NOMINAL CHARGE:** 6 L

OUR FIRST EXTINGUISHER TESTED FOR:

EXTINGUISHES FIRE OF LITHIUM BATTERIES

FIRES ARISING FROM EVERYDAY USE EQUIPMENTS

FIRES ON SMALL VEHICLES

FIRES ARISING FROM KITCHEN OILS

FIRES ARISING FROM HOUSEHOLD APPLIANCES

TESTED ON LITHIUM BATTERY WITH CAPACITY:

36 V - 750 W/h - 20,1 Ah

22066-25



22066-35



22066-25 : Portable Fire Extinguisher, 6 L Foam

**TESTED SUCCESSFULLY ON
LITHIUM BATTERY WITH CAPACITY:**



Note: image is for illustrative purpose only, the product purchased can has some difference

6 L foam fire extinguisher, temperature range from 0°C to +60°C, manufactured in accordance to **UNI EN 3-7 (D.M. 7.1.2005)**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment PED 2014/68/EU. Manufactured according to productions checks as agreed with **EN 3-10**. Quality Product certification guaranteed by Bureau Veritas Italia.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



36 V — 750 Wh — 20,1 Ah



DIELECTRIC

Suitable for use on fire involving electrical voltages up to 1.000 V, at a minimum distance of 1 meter.

CYLINDER

In high-strength alloy steel, deep drawing, external powder painting Red Ral 3000.

EXTINGUISHING AGENT

Water-based with foaming additives.

PROPELLANT

Dehumidified air or nitrogen (N₂).

VALVE

M. 30x1.5, brass body, levers with red painting Ral 3000.

USE

Class A Fires (solid materials)
Class B Fires (flammable liquids)
Class F Fires (cooking oils)
Lithium-ion batteries

**FIRE
RATING :**



ARE YOU READY FOR ZERO IMPACT ?

THE FUTURE IS ALREADY HERE !

Discover two revolutionary new extinguishing agents MADE to KEEP OUR PLANET GREEN.

- 100% SUSTAINABLE POWDER
- 100% FLUORINE/SILICON FREE FOAM



Il tuo produttore di estintori portatili acqua | schiuma



Fuochi di classe A - Fuochi di SOLIDI

Generati da combustibili solidi, con formazione di braci con l'esclusione dei metalli. In questa classe rientrano i fuochi generati da materiali quali il legno, la carta, i materiali tessili, le pelli, la gomma.



Fuochi di classe B - Fuochi di LIQUIDI

Generati da combustibili liquidi e da solidi liquefatti. In questa classe rientrano i fuochi generati da materiali quali l'alcool, i solventi, gli oli minerali, gli idrocarburi, la benzina.



Fuochi di classe F - Fuochi di OLI e GRASSI

Generati da oli e grassi di origine vegetale o animale. (Classe di fuoco introdotta con la norma EN2 del 2005)



Dielettrici

fino a 1'000 V, alla distanza minima di 1 metro

We strongly believe in foam fire- extinguishers. For this reason, we have been expanding our range over the past 7 years in order to meet the needs of our customers and Foreign Countries.

CO2 FIRE EXTINGUISHERS

The production line for carbon dioxide fire extinguishers has also been upgraded with a second station that is dedicated for the charging of mobile fire extinguishers.

The automated valve clamping system to the cylinder and the weighing control during the charging phase, ensure control and guarantee to the single finished product.



portatili CO₂



23020-7 23020-8 23020-74 23052-1 23052-7 23058-72 23020-9 23058-2

CAPACITA' 2 KG
CLASSE DI FUOCO
 34B
TEMPERATURA
 -30°C / +60°C

CAPACITA' 5 KG
CLASSE DI FUOCO
 113B 113B 89B
TEMPERATURA
 -20°C / +60°C -30°C / +60°C

CAPACITA' 2 KG 5 KG
CLASSE DI FUOCO
 34B 89B
TEMPERATURA
 -30°C / +60°C



Fuochi di classe A - Fuochi di SOLIDI

Generati da combustibili solidi, con formazione di braci con l'esclusione dei metalli. In questa classe rientrano i fuochi generati da materiali quali il legno, la carta, i materiali tessili, le pelli, la gomma.



Fuochi di classe B - Fuochi di LIQUIDI

Generati da combustibili liquidi e da solidi liquefabili. In questa classe rientrano i fuochi generati da materiali quali l'alcool, i solventi, gli oli minerali, gli idrocarburi, la benzina.



Fuochi di classe F - Fuochi di OLI e GRASSI

Generati da oli e grassi di origine vegetale o animale. (Classe di fuoco introdotta con la norma EN2 del 2005)



Dielettrici

fino a 1'000 V, alla distanza minima di 1 metro

Per visionare la gamma completa ed avere maggiori dettagli sul singolo prodotto visitare il sito www.emme-italia.com e consultare la relativa scheda tecnica

09.2022

EMME ANTINCENDIO S.r.l
 Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320



WHEELED FIRE EXTINGUISHERS



Il tuo produttore di estintori carrellati certificati EN 1866-1

L'introduzione della normativa EN 1866-1 modifica la classificazione in base alla capacità di spegnimento rispetto alla precedente UNI 9492. Di seguito una panoramica sui nuovi modelli e un confronto tra le capacità di spegnimento in base ai fuochi di prova delle due normative.

POLVERE ABC



Dielettrici
fino a 1'000 V, alla
distanza minima di 1 m.



Pressurizzato al momento dell'uso
con bombola esterna di CO₂

| MODELLO | 18258 | 18508 | 18508-52 | 18118 |
|--------------------|------------|------------|------------|------------|
| CARICA ESTINGUENTE | 25 Kg | 50 Kg | 50 Kg | 100 Kg |
| CLASSE DI FUOCO | A I B C | A I B C | A I B C | A I B C |
| TEMPERATURA | -30/+60 °C | -30/+60 °C | -30/+60 °C | -30/+60 °C |

CAPACITÀ DI SPEGNIMENTO: CLASSE B A CONFRONTO

| Nuovi Modelli Secondo EN 1866-1 | Modelli Secondo UNI 9492 |
|---|--|
| 25 Kg Focolari Spenti: 1 di 233 B + 2 di 21 B | 30 Kg Focolari Spenti: 1 di 233 B |
| 50 Kg Focolari Spenti: 1 di 233 B + 3 di 21 B | 50 Kg Focolari Spenti: 1 di 233 B |
| 100 Kg Focolari Spenti: 1 di 233 B + 4 di 21 B | 100 Kg Focolari Spenti: 1 di 233 B |

SCHIUMA A BASE D'ACQUA



Dielettrici
fino a 1'000 V, alla
distanza minima di 1 m.



Pressurizzato al momento
dell'uso con bombola
esterna di N₂

| MODELLO | 19258 | 19508 | 19508-3 | 19118 | 19158-51 |
|--------------------|-----------|-----------|------------|-----------|-----------|
| CARICA ESTINGUENTE | 25 Lt. | 50 Lt. | 50 Lt. | 100 Lt. | 150 Lt. |
| CLASSE DI FUOCO | A I B | A I B | A I B | A I B | A I B |
| TEMPERATURA | +5/+60 °C | +5/+60 °C | -30/+60 °C | +5/+60 °C | +5/+60 °C |

CAPACITÀ DI SPEGNIMENTO: CLASSE B A CONFRONTO

| Nuovi Modelli Secondo EN 1866-1 | Modelli Secondo UNI 9492 |
|---|--|
| 50 L Focolari Spenti: 1 di 233 B + 4 di 21 B | 50 L Focolari Spenti: 1 di 233 B |

CO₂ (BIOSSIDO DI CARBONIO)



Dielettrici
fino a 1'000 V, alla
distanza minima di 1 m.



| MODELLO | 17103-1 | 17204 | 17304 | 17504 |
|--------------------|------------|------------|------------|------------|
| CARICA ESTINGUENTE | 10 Kg | 20 Kg | 30 Kg | 50 Kg |
| CLASSE DI FUOCO | 144 B | 233 B | 233 B | 233 B |
| TEMPERATURA | -30/+60 °C | -30/+60 °C | -30/+60 °C | -30/+60 °C |

CAPACITÀ DI SPEGNIMENTO: CLASSE B A CONFRONTO

| Nuovi Modelli Secondo EN 1866-1 | Modelli Secondo UNI 9492 |
|---|--|
| 20 Kg Focolari Spenti: 1 di 233 B | 18 Kg Focolari Spenti: 1 di 55 B |
| 30 Kg Focolari Spenti: 1 di 233 B | 27 Kg Focolari Spenti: 1 di 80 B |

We have talked about and presented our portable fire extinguishers in every aspect and the care taken in their manufacture have enabled us to certify the entire range of mobile fire extinguishers to European standard EN 1866-1

Per visionare la gamma completa ed avere maggiori dettagli sul singolo prodotto visitare il sito www.emme-italia.com e consultare la relativa scheda tecnica

WHEELED FIRE EXTINGUISHERS

We have chosen to
manufacture all EN
1866-1 certified mobile
fire extinguishers with
powder and foam
extinguisher and with
welded directly to the
casing



WHEELED FIRE EXTINGUISHERS

We have chosen to manufacture all EN 1866-1 certified wheeled fire- extinguishers with powder and foam extinguishing agent and with the frame welded directly to the cylinder.



WHEELED FIRE EXTINGUISHERS

Emme Antincendio in fact obtained the first EN 1866-1 certified approvals with its entire family of carbon dioxide mobile extinguishers in 2018.

Emme Antincendio manufactures its mobile fire extinguishers exclusively with highly qualified and specialised Companies, and requires a high standard of quality. For this reason, all our mobile fire extinguishers with water-based extinguishing agent are exclusively made of stainless steel.





THE FUTURE IS
GROWING TOGETHER

