



PRODUZIONE ESTINTORI D'INCENDIO OMOLOGATI E CERTIFICATI  
PRODUCTION OF APPROVED FIRE EXTINGUISHERS

[www.emme-italia.com](http://www.emme-italia.com)



## Data Sheet

Code 19508-52 L 50 Foam Wheeled Fire Extinguisher EN 1866-1  
Code 15508-52 Approved European Marine Equipment Directive (MED 2014/90/EU)  
Fire Rating A IV B



### Features

- Manufactured in accordance with and tested EN 1866-1.
- Approved by European Marine Directive MED 2014/90/EU
- S.O.L.A.S. (Safety of life at sea) '74 (2000)
- CE marked modul H according to PED 2014/68/EU
- *Quality Product* certification guaranteed by Bureau Veritas Italia
- Pressurized at moment of use with Co2 cylinder
- Steel AISI 304 cylinder
- Foam EW6

It can be used on electrical equipment up to 1000 V voltage.

Suitable on class A fires (combustible materials) and Class B fires (flammable liquids)

- Manufactured in Italy



| File Name          | Code     | Date       | Rele. | Chek | Rev. | Pag. |
|--------------------|----------|------------|-------|------|------|------|
| DDs_19508-52_18253 | 19508-52 | 22/06/2017 | D.P.  | -    | 0    | 1/2  |

#### EMME ANTINCENDIO S.r.l

Factory: Via del Molino, 40 - 52010 Corsalone (AR) - Italy - Tel. +39.0575.511320  
Warehouse: Via G. Di Vittorio, 11 - 20017 Mazzo di Rho (MI) - Italy - Tel. +39.0293900399  
E-mail: [info@emme-italia.com](mailto:info@emme-italia.com) - [milano@emme-italia.com](mailto:milano@emme-italia.com) - web site: [www.emme-italia.com](http://www.emme-italia.com)  
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545



PRODUZIONE ESTINTORI D'INCENDIO OMOLOGATI E CERTIFICATI  
PRODUCTION OF APPROVED FIRE EXTINGUISHERS

[www.emme-italia.com](http://www.emme-italia.com)



### Technical Specifications

|                        |                                                        |
|------------------------|--------------------------------------------------------|
| Model EN 1866-1        | <i>cod. 19508-52</i>                                   |
| Model MED 96/98        | <i>cod. 15508-52</i>                                   |
| Fire Rating            | <i>A IV B</i>                                          |
| Extinguishing Agent    | <i>Foam EW 6</i>                                       |
| Temperature Range      | <i>+5°C + 60°C</i>                                     |
| Propellant             | <i>Side Cylinder 2kg Co2</i>                           |
| Nominal Charge         | <i>L 50</i>                                            |
| Cylinder Volume        | <i>L 60</i>                                            |
| Discharge Time         | <i>40 sec.</i>                                         |
| Discharge Range        | <i>10 m</i>                                            |
| Hose                   | <i>EPDM m 5</i>                                        |
| Cylinder Pressure Test | <i>PT 30 Bar</i>                                       |
| Cylinder Material      | <i>Stainless Steel Aisi 304</i>                        |
| External Treatment     | <i>Sandblast, epoxypolyestere coating red RAL 3000</i> |

|              |                     |
|--------------|---------------------|
| Cap 2"       | <i>Brass</i>        |
| Safety Valve | <i>22 +/- 2 Bar</i> |

#### Dimensions

|             |                     |
|-------------|---------------------|
| Height      | 1090 mm             |
| Width       | 480 mm              |
| Depth       | 480 mm              |
| Full weight | Kg 80               |
| Packaging   | 100x120x130cm pcs.6 |

### Installation


Do not expose the fire extinguisher to direct sunlight.  
A protective Pvc cover is recommended when installed in marine and off-shore environments

### Spare Parts List

| Pos. | Descrizione     | Codice |
|------|-----------------|--------|
| 1    | Cap 2"          | 18463  |
| 2    | Safety Valve    | 2048   |
| 3    | Nozzle          | 2181-2 |
| 4    | Hose m 5        | 18421  |
| 5    | Wheel d. 300 mm | 0124   |
| 6    | Co2 Cylinder    | 18519  |
| 00   | Foam EWAB6      | 2144-1 |

### Optional

|           |                  |
|-----------|------------------|
| Cover pvc | <b>Code 1795</b> |
|-----------|------------------|

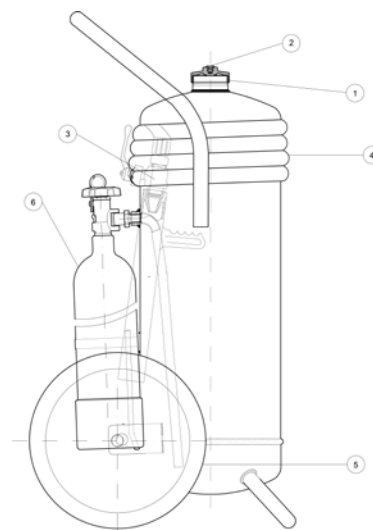

### Maintenance

The extinguishers must be inspected and serviced by a TRAINED QUALIFIED PERSON in accordance with the local regulation concerning the inspections of the pressure equipments fire extinguishers. To ensure safe, trouble free performance and long life of the extinguishers, the manufacturer recommends the following: At least every two years replace the extinguishing agent; Inspect the cylinder and valve assembly for any external and internal damage or corrosion. Repair or replace all defective parts using only Manufacturers supplied parts or refills; At least every 12 years from date of manufacture the extinguisher must be overhauled by means of an hydraulic pressure test at the pressure PT stamped on the cylinder, and submitted to a thorough inspection of the cylinder and valve should be made checking for any external or internal damage or corrosion. Any defective parts should be repaired or replaced using the specified parts mentioned in the spare part list.

| File Name          | Code     | Date       | Rele. | Chek | Rev. | Pag. |
|--------------------|----------|------------|-------|------|------|------|
| DDs_19508-52_18253 | 19508-52 | 22/06/2017 | D.P.  | -    | 0    | 2/2  |

#### EMME ANTINCENDIO S.r.l

Factory: Via del Molino, 40 - 52010 Corsalene (AR) - Italy - Tel. +39.0575.511320  
Warehouse: Via G. Di Vittorio, 11 - 20017 Mazzo di Rho (MI) - Italy - Tel. +39.0293900399  
E-mail: [info@emme-italia.com](mailto:info@emme-italia.com) - [milano@emme-italia.com](mailto:milano@emme-italia.com) - web site: [www.emme-italia.com](http://www.emme-italia.com)  
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545