



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

21031

3Kg Powder FIRE EXTINGUISHER



- **CYLINDER**
Deep drawing alloy steel, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
ABC powder.
- **PROPELLANT**
Dehumidified air or N₂.
- **VALVE**
Brass M 30X1.5, levers with red painting RAL3000.
- **USE**
A B C fire rating
(solid materials, flammable liquids, flammable gas).
- **BRACKET**
Wall-mounted in standard equipment.

3Kg powder fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **EN 3-7:2008**, approved to European Marine Directive **MED 2014/90/EU, S.O.L.A.S.** (Safety of life at sea) '74 (2000), certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving voltages of up to 1000 volts.

AVAILABLE VERSIONS



N.	CODE	DESCRIPTION
1	26031-1	3kg powder fire extinguisher, complies MED 2014/90/EU

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



13



113



✓

21031

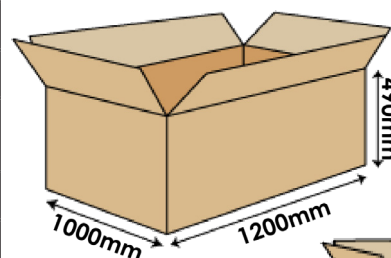
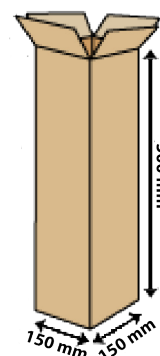
3Kg Powder FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	13 A 113 B C
EXTINGUISHING AGENT	EPW 18462 powder
PROPELLANT	Dehumidified air or N ₂ , 15 Bar at 20°C
TEMPERATURE RANGE	-30°C +60°C
NOMINAL CHARGE	3 Kg
FULL WEIGHT	~ 5,4 Kg
DIMENSIONS	Height 470 mm Diameter 130 mm
DISCHARGE TIME	15 sec.
MAX VALVE TIGHTENING	Between 40 and 50 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	4,3 L.
SAFETY VALVE	Set 20 and 26 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour

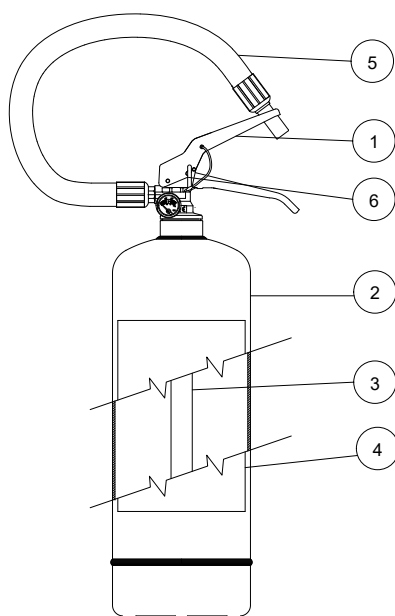
PACKAGING

STANDARD :

nr. 63 pieces for box, max 2 boxes for pallet
100x120x115 (Tot. 63+63 p.)SINGLE PACKAGING
ON REQUEST

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the norm in use in utilization country.



SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M 30 X 1.5	0212
2	Cylinder	0103
3	PVC dip tube	0153
4	Label	0090-2
5	Hose	0291
6	Safety pin	0282-1
	Safety valve	0261
	Safety pin seal	0285
	ABC powder	18462
OPTIONAL	Iron marine bracket red painting	0315

EMME ANTINCENDIO S.r.l

Factory: Via del Molino, 40 – 52010 Corsalone (AR) – Italy – Tel. +39.0575.511320
 Warehouse MI: Via G. Di Vittorio, 11 – 20017 Mazzo di Rho (MI) – Italy – Tel. +39.0293900399
 Warehouse PD: Via Polonia, 35 – 35127 Padova (PD) – Italy – Tel. +39.049.6453824
 E-mail: info@emme-italia.com – web site: www.emme-italia.com
 P.IVA/ C.F. 11208251006 – R.E.A. FI-632545

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_21031	21031	21/05/18	M.R		1	2