



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

22063

6L Foam FIRE EXTINGUISHER



CLIP DETAIL



- **CYLINDER**
Deep drawing alloy steel, with clip, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
EW-30 foam.
- **PROPELLANT**
Dehumidified air or N2.
- **VALVE**
CPF brass M 30X1.5, levers with green/white painting.
- **USE**
A B F fire rating
(solid materials, flammable liquids, cooking oil).
- **BRACKET**
Wall-mounted in standard equipment.

6L foam fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to EN 3-7, approved to European Marine Directive MED 2014/90/EU, S.O.L.A.S. (Safety of life at sea) '74 (2000), certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving voltages of up to 1000 volts.

AVAILABLE VERSIONS

1



N.	CODE	DESCRIPTION
1	27063	6L foam fire extinguisher, complies MED 2014/90/EU

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



34



233



75


6L Foam FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	34 A 233 B 75 F
EXTINGUISHING AGENT	EW-30 foam
PROPELLANT	Dehumidified air or N2, 15 Bar at 20°C
TEMPERATURE RANGE	-30°C +60°C
NOMINAL CHARGE	6 L
FULL WEIGHT	~ 9,4 Kg
DIMENSIONS	Height 560 mm Diameter 160 mm
DISCHARGE TIME	35,5 sec.
MAX VALVE TIGHTENING	Between 40 and 50 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	7,8 L.
SAFETY VALVE	Set 20 and 26 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour/ Plastified


PACKAGING

STANDARD :

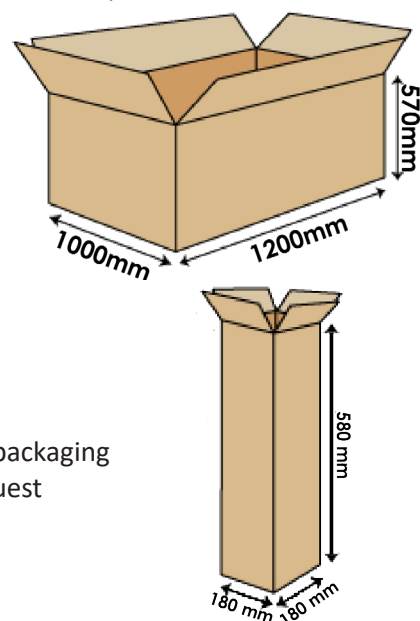nr. 44 pieces for box
max 2 boxes for palletSingle packaging
on request

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the norm in use in utilization country.

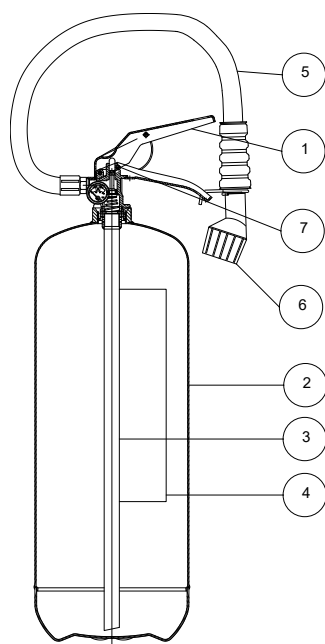

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M 30 X 1.5	0212CS
2	Cylinder	112-3
3	PVC dip tube	0154
4	Label	1577
5	Hose	0293
6	Dispensing nozzle	1645
7	Safety pin	0282C
	Safety valve	0261C
	Safety pin seal	0285
	EW-30 foam	1623
OPTIONAL	Iron marine bracket red painting	0316
OPTIONAL	Stainless steel marine bracket	1464

EMME ANTINCENDIO S.r.l

Factory: Via del Molino, 40 – 52010 Corsalone (AR) – Italy – Tel. +39.0575.511320
 Warehouse: Via G. Di Vittorio, 11 – 20017 Mazzo di Rho (MI) – Italy – Tel. +39.0293900399
 E-mail: info@emme-italia.com – web site: www.emme-italia.com
 P.IVA/ C.F. 11208251006 – R.E.A. FI-632545

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_22063	22063	27/12/17	M.R	MR	1	2