



PRODUZIONE ESTINTORI D'INCENDIO OMOLOGATI E CERTIFICATI
PRODUCTION OF APPROVED FIRE EXTINGUISHERS

www.emme-italia.com



Data Sheet

Code 22064-12 L 6 Foam Anti-freeze Fire Extinguisher UNI EN 3-7

Fire Rating 43 A 233 B 75 F



Features

- Manufactured in accordance with and tested EN 3-7
- CE marked according to PED 2014/68/EU
- *Quality Product* certification guaranteed by Bureau Veritas Italia
- Permanent pressure with N₂ or dehumidified air
- High quality pressure gauge
- Foam Anti-freeze EW-10
- Aisi 304 cylinder
- Special CPF anticorrosion valve

It can be used on electrical equipment up to 1000 V voltage.

Suitable on Class A fires (combustible materials), Class B fires (flammable liquids) and Class F fires (cooking oils and fats)

- Manufactured in Italy



File Name	Code	Date	Rele.	Chek	Rev.	Pag.
Ds_22064-12	22064-12	20/06/2017	D.P.		0	1/2

EMME ANTINCENDIO S.r.l

Factory: Via del Molino, 40 - 52010 Corsalene (AR) - Italy - Tel. +39.0575.511320
Warehouse: Via G. Di Vittorio, 11 - 20017 Mazzo di Rho (MI) - Italy - Tel. +39.0293900399
E-mail: info@emme-italia.com - milano@emme-italia.com - web site: www.emme-italia.com
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545



PRODUZIONE ESTINTORI D'INCENDIO OMOLOGATI E CERTIFICATI
PRODUCTION OF APPROVED FIRE EXTINGUISHERS

www.emme-italia.com



Technical Specifications


Model UNI EN 3-7	<i>cod. 22064-11</i>
Nominal Charge	<i>6 L</i>
Fire Rating	<i>43 A 233 B 75 F</i>
Temperature Range	<i>-10°C + 60°C</i>
Extinguishing Agent	<i>Foam EW-10</i>
Working Pressure	<i>Dehumidified air or N2</i> <i>14 Bar a 20°C</i>
Discharge Time	<i>23 sec.</i>
Valve Tightening	<i>50 N</i>
Discharge Range	<i>3 m</i>
Cylinder Pressure Test	<i>PT 27 Bar</i>
Cylinder Pressure Test	<i>>55 Bar</i>
Cylinder Volume	<i>L 7.8</i>
Safety Valve	<i>20 - 26 Bar</i>
Cylinder Material	<i>Stainless Steel Aisi 304</i>
External Treatment	<i>Sandblast, epoxypolyestere</i> <i>coating red RAL 3000</i>

Dimensions

Height	<i>550 mm</i>
Diameter	<i>160 mm</i>
Weight	<i>Kg 9.86</i>

Packaging

1 Piece	N°44 Pieces
	Max 2 boxes for pallet

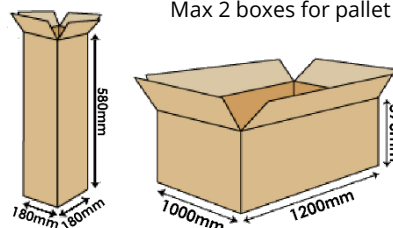

Installation


Do not expose the fire extinguisher to direct sunlight.
A protective Pvc cover is recommended when installed in marine and off-shore environments.

Spare Parts List

Pos.	Description	Code
1	Valve	0212-CS
2	Pressure Gauge	1576
3	Foam EW-10	8959
4	Cylinder	1849
5	Dip Tube	0154
6	Hose	0293-2

Optional

Cover pvc		Code 0401
Bracket	Iron	Code 0316
	Aisi 304	Code 1464

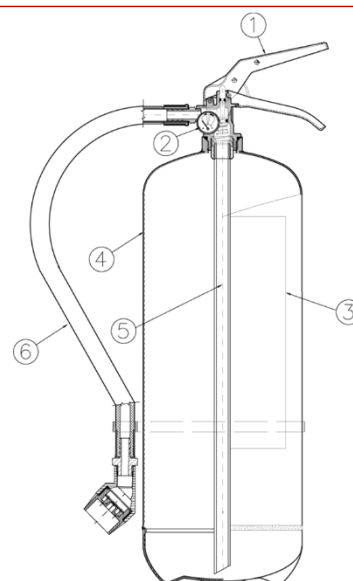

Maintenance

The extinguishers must be inspected and serviced by a TRAINED QUALIFIED PERSON in accordance with the local regulation concerning the inspections of the pressure equipment fire extinguishers. To ensure safe, trouble free performance and long life of the extinguishers, the manufacturer recommends the following: At least every two years replace the extinguishing agent; Inspect the cylinder and valve assembly for any external and internal damage or corrosion. Repair or replace all defective parts using only manufacturers supplied parts or refills; At least every 10 years from date of manufacture the extinguisher must be overhauled by means of an hydraulic pressure test at the pressure PT stamped on the cylinder, and submitted to a thorough inspection of the cylinder and valve should be made checking for any external or internal damage or corrosion. Any defective parts should be repaired or replaced using the specified parts mentioned in the spare part list.

File Name	Code	Date	Rele.	Chek	Rev.	Pag.
Ds_22064-12	22064-12	20/06/2017	D.P.		0	2/2

EMME ANTINCENDIO S.r.l

Factory: Via del Molino, 40 - 52010 Corsalone (AR) - Italy - Tel. +39.0575.511320
Warehouse: Via G. Di Vittorio, 11 - 20017 Mazzo di Rho (MI) - Italy - Tel. +39.0293900399
E-mail: info@emme-italia.com - milano@emme-italia.com - web site: www.emme-italia.com
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545