



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

25069

6Kg D Powder FIRE EXTINGUISHER



- CYLINDER
Alloy steel, 3 pieces, epoxypolyester powder painting, Red Ral 3000
- EXTINGUISHING AGENT
D powder .
- PROPELLANT
Dehumidified air or N2.
- VALVE
Brass M 30X1.5, levers with red painting RAL3000.
- USE
D fire rating
(recommended in environments with risks arising from the presence of flammable metal.).
- BRACKET
Wall-mounted in standard equipment.

© REPRODUCTION IS PROHIBITED

6Kg powder fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to EN 3-7, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving voltages of up to 1000 volts.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



25069


6Kg D Powder FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	D
EXTINGUISHING AGENT	EPD 0356 powder
PROPELLANT	Dehumidified air or N ₂ , 15 Bar at 20°C
TEMPERATURE RANGE	-30°C +60°C
NOMINAL CHARGE	6 Kg
FULL WEIGHT	~ 9 Kg
DIMENSIONS	Height 500 mm Diameter 158 mm
DISCHARGE TIME	18,5 sec.
MAX VALVE TIGHTENING	Between 40 and 50 Nm
CYLINDER PRESSURE TEST	PT 30 bar
CYLINDER VOLUME	7,1 L.
SAFETY VALVE	Set 20 and 26 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour

PACKAGING


STANDARD :
nr. 44 pieces for box, max 2 boxes for pallet
100x120x130 + 12 pieces in single packaging.
(Tot. 44+44+12 p.)

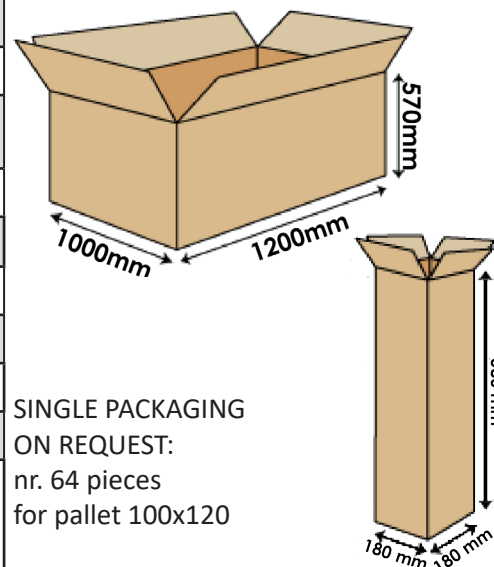

SINGLE PACKAGING
ON REQUEST:
nr. 64 pieces
for pallet 100x120

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the norm in use in utilization country.

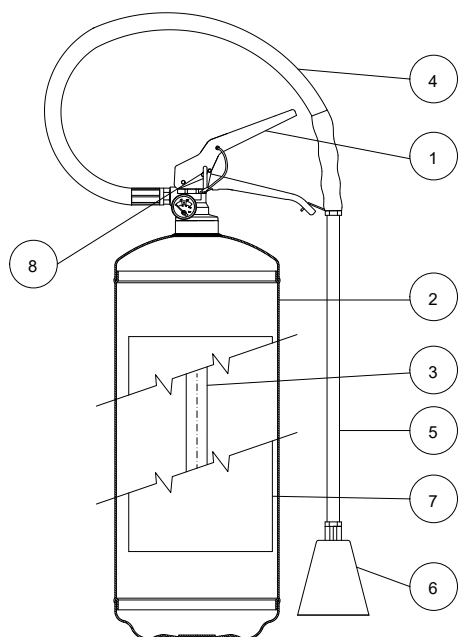

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M 30 X 1.5	0212
2	Cylinder	1848K
3	PVC dip tube	0154
4	Hose	0293
5	Extension hose	1778-1
6	Horn	2259-4
7	Label	1943
8	Safety pin	0282-1
	Safety valve	0261
	Safety pin seal	0285
	D powder	0356

EMME ANTINCENDIO S.r.l

Factory: Via del Molino, 40 – 52010 Corsalone (AR) – Italy – Tel. +39.0575.511320
Warehouse: Via G. Di Vittorio, 11 – 20017 Mazzo di Rho (MI) – Italy – Tel. +39.0293900399
E-mail: info@emme-italia.com – web site: www.emme-italia.com
P.IVA/ C.F. 11208251006 – R.E.A. FI-632545

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_25069	25069	25/10/17	M.R	AA	1	2