

Technical Manual



www.emme-italia.com

Via del Molino, 40 – 52010 Corsalone (AR) – Italy – info@emme-italia.com – Tel. +39.0575.511320
P.IVA/ C.F. 11208251006 – R.E.A. AR-159122

19508-11 : Wheeled Fire Extinguisher, 50 L Foam



DISPENSING PISTOL WITH
ROTATING CONNECTION

- **CYLINDER**
Stainless steel AISI 304,
powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
Water based foam.
- **PROPELLANT**
Dehumidified air or Nitrogen (N₂).
- **VALVE**
2"-F , brass body, lever with green
painting Ral 6029.
- **USE**
A B fire rating
(solid materials, flammable liquids).
- **BRACKET**
Chassis on wheels, welded at the
cylinder, red painting Ral 3000.
- **DISPENSING PISTOL**
Body in plastic material.
The rotating connection allow an easy
unroll of hose.

REPRODUCTION IS PROHIBITED

Note: image is for illustrative purpose only, the product purchased can have some differences

50 L foam wheeled fire extinguisher, temperature range from +5°C to +60°C, manufactured in accordance to **UNI EN 1866-1 (D.M. 6.3.92)**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment **PED 2014/68/EU**.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 meter.

APPROVED\CERTIFIED FIRE EXTINGUISHER:



MPA
Dresden



PED 2014/68/EU



**FIRE
RATING :**



IV

File name	Type of document	Fire Extinguisher Model	Date	Rel.	Check	Rev.	Pag.
19508-11_Technical Manual	Technical Manual	19508-11	28/05/2025	S.R		3	1/3

19508-11 : Wheeled Fire Extinguisher, 50 L Foam

• INSTALLATION

The installation must be carried out in accordance with the provisions in force in the country where the device is used.

• USE

The commissioning and maintenance activities for maintaining efficiency must be carried

• MAINTENANCE

out in accordance with the document **CSP_1_ENG** by qualified technical personnel and in compliance with the regulations in force in the country of use.

Any tampering or intervention carried out by unqualified personnel will void the product warranty.

It is recommended to place the device in a dry place protected from atmospheric agents.


TECHNICAL SPECIFICATIONS

FIRE RATING	A IV B
EXTINGUISHING AGENT	Water based foam (2 % SC-6 orchidee + 98 % Water) (* Hyper-filtered water with an osmosis process)
PROPELLANT	Dehumidified air or Nitrogen (N ₂), 15 Bar at 20°C
TEMPERATURE RANGE	+5°C / +60°C
NOMINAL CHARGE	50 Liters
FULL WEIGHT	~ 75,5 Kg
DIMENSIONS	Height 1100 +/- 10 mm ; Width 490 +/- 10 mm Depth 500 +/- 15 mm
DISCHARGE TIME	~ 253,5 seconds
CYLINDER PRESSURE TEST	PT 30 bar
CYLINDER VOLUME	62 L
SAFETY DEVICE	Set between 21 and 26 bar
CYLINDER MATERIAL	Stainless steel AISI 304
TREATMENT	Outside: Sandblast and powder painting Ral 3000

PACKAGING

(Note: the packaging quantities and measurements are indicative and can be subject at changes)

STANDARD
Maximum nr. 6 pieces for pallet
Pallet dimensions 100x120x135(h) cm

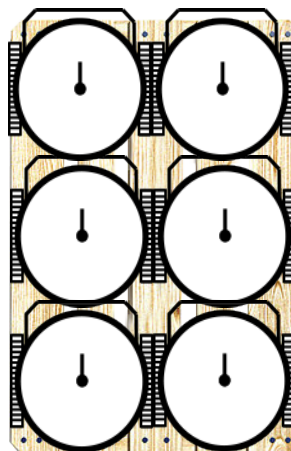

TRANSPORT DISPOSAL


Land transport : Exemption for the purposes of ADR disposal 594

Ship Transport : IMDG Code – UN 1044 class 2.2 Fire Extinguishers

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
19508-11_Technical Manual	Technical Manual	19508-11	28/05/2025	S.R		3	2/3

19508-11 : Wheeled Fire Extinguisher, 50 L Foam

COMPONENTS AND SPARE PARTS LIST

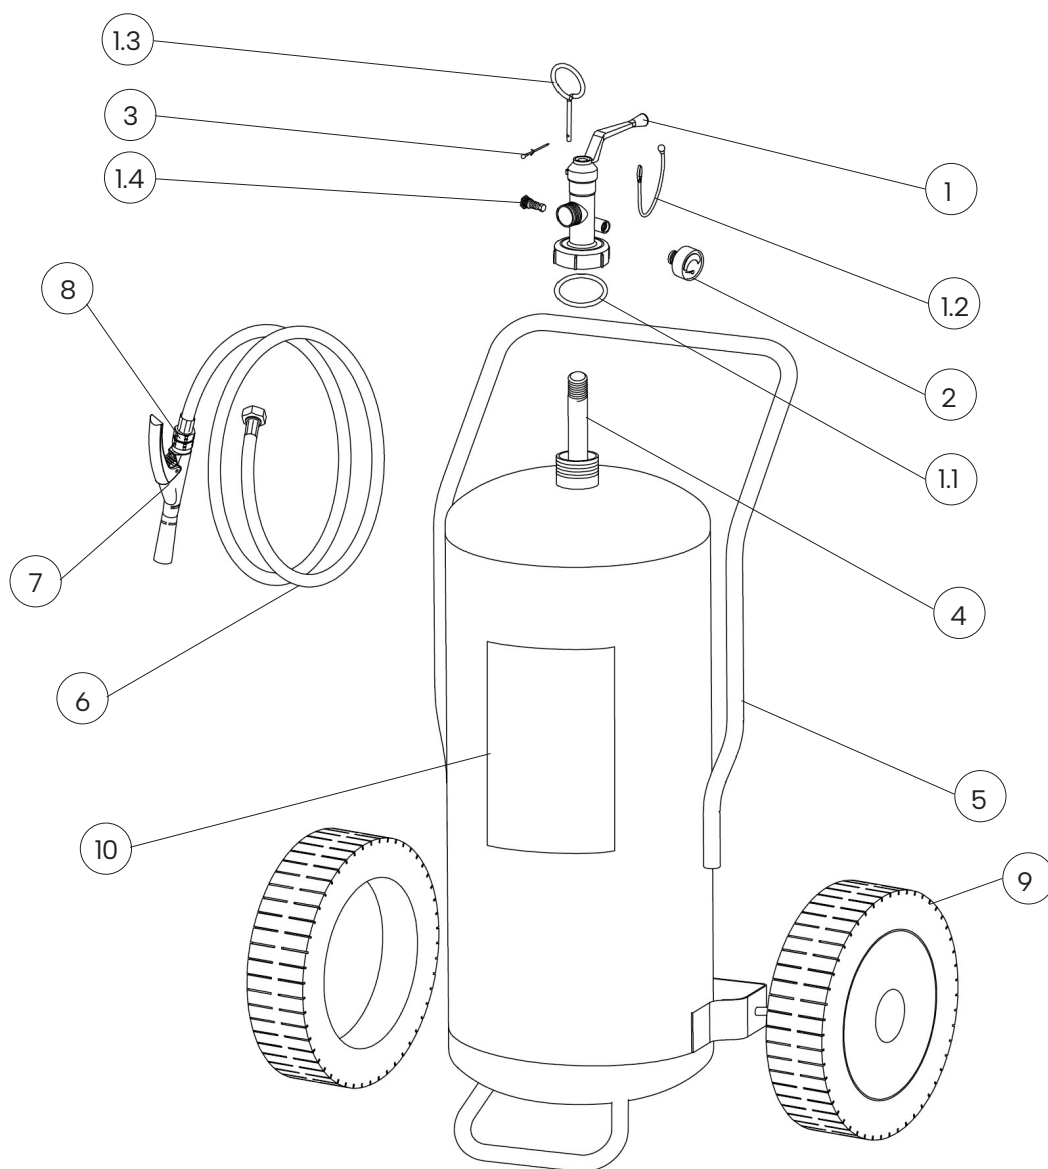

NUM.	DESCRIPTION	CODE
1	Valve 2"-F	0214RV
1.1	O-ring valve	0203
1.2	Tamper seal	0286N
1.3	Safety pin	0283R
1.4	Safety device	0263R
2	Pressure gauge	1576
3	Safety pin seal	0285
4	PVC dip tube	0162
5	Cylinder	18323

NUM.	DESCRIPTION	CODE
6	Hose	18421
7	Dispensing pistol with nozzle	2181-6
8	Adapter fitting for hose-pistol	2293
9	Wheel + wheel stop (diam. 300mm)	0124V
10	Label	1958-11
	Additive for refill (1 Lt. concentrate - To mix with water, for one single refill)	1470-1

The spare part at number 1, includes already others components from 1.1 to 1.4

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
19508-11_Technical Manual	Technical Manual	19508-11	28/05/2025	S.R		3	3/3