

Technical Manual



SAFETY
FOR
FUTURE



www.emme-italia.com

Via del Molino, 40 - 52010 Corsalone (AR) - Italy - info@emme-italia.com - Tel. +39.0575.511320
P.IVA/ C.F. 11208251006 - R.E.A. AR-159122

21010-1 : Portable Fire Extinguisher, 1 Kg ABC Powder




- **CYLINDER**
In high-strength alloy steel, deep drawing, external powder painting Red Ral 3000.
- **EXTINGUISHING AGENT**
ABC Powder - MAP 20 %.
- **PROPELLANT**
Dehumidified air or nitrogen (N₂).
- **VALVE**
M. 30x1.5, brass body, levers with red painting Ral 3000.
- **USE**
A B C fire rating
(solid materials, flammable liquids, flammable gas).

Note: image is for illustrative purpose only, the product purchased can has some difference

1 Kg powder fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 3-7 (D.M. 7.1.2005)**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment PED 2014/68/EU. Manufactured according at productions checks as agreed with **EN 3-10**. Quality Product certification guaranteed by Bureau Veritas Italia. Suitable for use on fire involving electrical voltages up to 1'000 V, at a minimum distance of 1 meter.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



FIRE
RATING :



File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
21010-1_Technical manual	Technical manual	21010-1	20/07/2026	M.M.		4	1/3

REPRODUCTION IS PROHIBITED

21010-1 : Portable Fire Extinguisher, 1 Kg ABC Powder

- **INSTALLATION**
- **USE**
- **MAINTENANCE**

The installation must be carried out in accordance with the provisions in force in the country where the device is used. The commissioning and maintenance activities for maintaining efficiency must be carried out in accordance with the document

EPP_1_ENG by qualified technical personnel and in compliance with the regulations in force in the country of use.

Any tampering or intervention carried out by unqualified personnel will void the product warranty.

It is recommended to place the device in a dry place protected from atmospheric agents.

TECHNICAL SPECIFICATIONS

FIRE RATING	8 A 34 B C
EXTINGUISHING AGENT	ABC powder - MAP 20 % EPW 18462 (ABC Favorit Tertia - Rühl)
PROPELLANT	Dehumidified air or Nitrogen (N ₂), 15 Bar at 20°C
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	1 Kg
FULL WEIGHT	~ 2,2 Kg (with bracket)
DIMENSIONS	Height (base - valve) 338 +/- 5 mm Diameter (cylinder) 85 +/- 2 mm
DISCHARGE TIME	~ 6,4 seconds
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	1,25 L
SAFETY DEVICE	Set between 20 and 26 bar
CYLINDER MATERIAL	Alloy steel
TREATMENT	Outside: Sandblast and powder painting, Ral 3000

PACKAGING

(Note: quantities and measurements are indicative and can be subject at changes)

STANDARD

Note: minimum 6 pieces

- Maximum 240

Pallet dimensions: 120x80 cm

- Maximum 90

Pallet dimensions: 80x60 cm

TRANSPORT DISPOSAL


Land transport : Exemption for the purposes of ADR disposal 594

Ship Transport : IMDG Code - UN 1044 class 2.2 Fire Extinguishers

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
21010-1_Technical manual	Technical manual	21010-1	20/07/2026	M.M.		4	2/3

21010-1 : Portable Fire Extinguisher, 1 Kg ABC Powder

COMPONENTS AND SPARE PARTS LIST

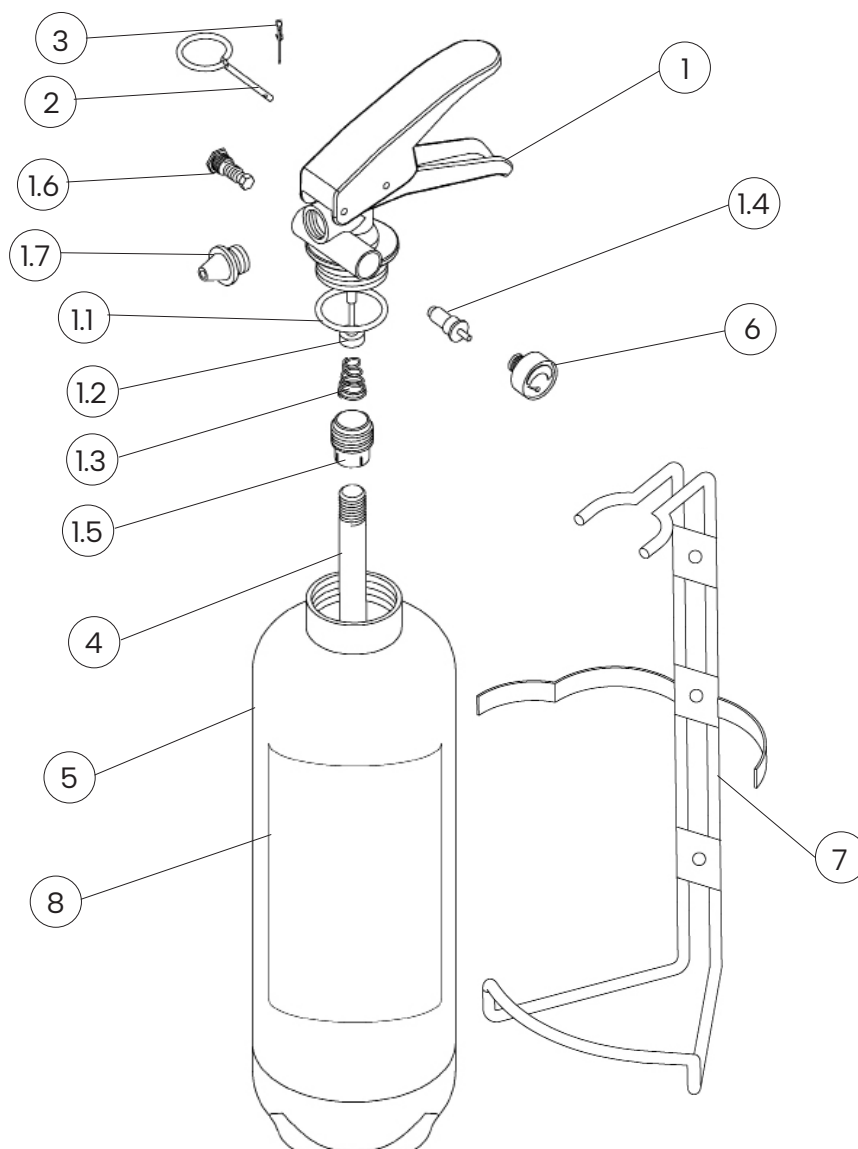

NUM.	DESCRIPTION	CODE
1	Valve M. 30x1.5	0211
1.1	O-ring valve	0201-13
1.2	Valve stem	0241R
1.3	Internal spring of the valve	n.a.
1.4	Test valve for pressure gauge	1163
1.5	Dip tube holder	n.a.
1.6	Safety device	0261R
1.7	Dispensing nozzle	0287

NUM.	DESCRIPTION	CODE
2	Safety pin	0282-1
3	Safety pin seal	0285
4	PVC dip tube	0151
5	Cylinder	0101
6	Pressure gauge	0271-1
7	Bracket	0326
8	Label	0051-2

The spare part at number 1 includes already all others components indicated from 1.1 to 1.7

"n.a." mean that the component is not available as single spare part

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
21010-1_Technical manual	Technical manual	21010-1	20/07/2026	M.M.		4	3/3