



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

21021

## 2 Kg Powder FIRE EXTINGUISHER



- **CYLINDER**  
Alloy steel, deep drawing, epoxypolyester powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**  
ABC Powder - MAP 40 %.
- **PROPELLANT**  
Dehumidified air or N<sub>2</sub>.
- **VALVE**  
M. 30x1.5, brass body, levers with red painting Ral 3000.
- **USE**  
A B C fire rating  
(solid materials, flammable liquids, flammable gas).
- **BRACKET**  
Iron wire in standard equipment.

© REPRODUCTION IS PROHIBITED


*Note: image is for illustrative purpose only, the product purchased can has some differences*

2 Kg powder fire extinguisher, temperature range from -20°C to +60°C, manufactured in accordance to **UNI EN 3-7 (D.M. 7.1.2005)**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE  
RATING :**



# 21021


## 2 Kg Powder FIRE EXTINGUISHER

### TECHNICAL SPECIFICATIONS


FIRE RATING	13 A 89 B C
EXTINGUISHING AGENT	EPB 0351 (QFIRE-40) ABC powder - MAP 40 %
PROPELLANT	Dehumidified air or N <sub>2</sub> ,15 Bar at 20°C
TEMPERATURE RANGE	-20°C / +60°C
NOMINAL CHARGE	2 Kg
FULL WEIGHT	~ 3,7 Kg
DIMENSIONS	Height(base-valve) 380 mm Diameter 110 mm
DISCHARGE TIME	13,5 sec.
VALVE TIGHTENING TORQUE	Minimum 45 Nm, Maximum 68 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	2,5 L.
SAFETY VALVE	Set between 20 and 26 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour

### PACKAGING

STANDARD : minimum 8 pieces for box  
Maximum 256 pieces for pallet  
(32 boxes with 8 pieces each box)  
Pallet dimensions 100x120 cm

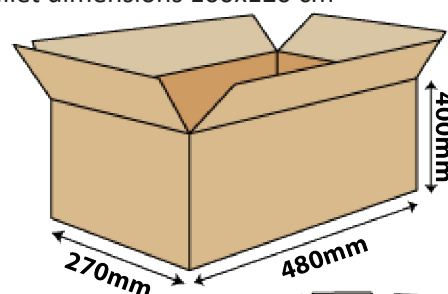


SINGLE PACKAGING  
ON REQUEST  
- maximum 192 pieces  
on pallet 100x120 cm

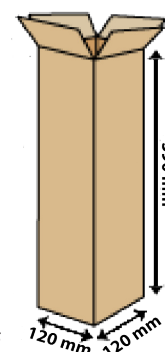

*Note: the packaging quantities and measurements are indicative and can be subject at changes*

### MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

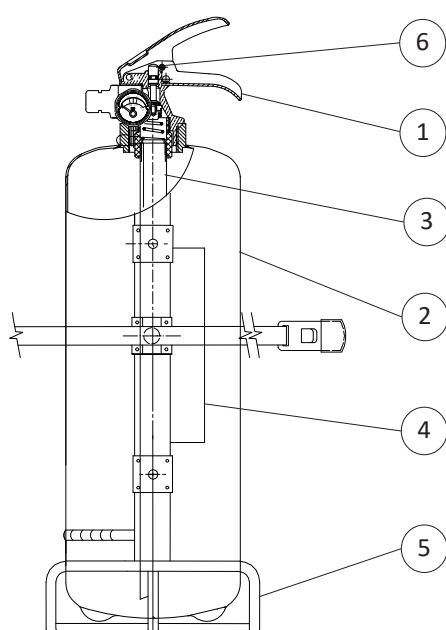

### SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 30x1.5	0211
2	Cylinder	0102
3	PVC dip tube	0152
4	Label	0052
5	Iron wire bracket	0327
6	Safety pin	0281
	Safety valve	0261
	Safety pin seal	0285

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_21021	21021	03/04/20	M.R	MR	2	2

### EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy  
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia  
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545