Technical Manual





www.emme-italia.com

Via del Molino, 40 - 52010 Corsalone (AR) - Italy - info@emme-italia.com - Tel. +39.0575.511320 P.IVA/ C.F. 11208251006 - R.E.A. AR-159122

21095-7: Portable Fire Extinguisher, 9 Kg ABC Powder







- CYLINDER
 In high-strength alloy steel,
 Record drawing with clip.
- powder painting Red Ral 3000.
 EXTINGUISHING AGENT
- ABC Powder MAP 20%.
- PROPELLANT Dehumidified air or nitrogen (N_2).
- VALVE
 M. 30x1.5, lightweight aluminum alloy AA6061 body, levers with red painting Ral 3000.
- USE
 A B C fire rating
 (solid materials, flammable liquids, flammable gas).

Note: image is for illustrative purpose only, the product purchased can has some difference

9 Kg powder fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 3-7** (D.M. 7.1.2005), certified according to the directive for pressure equipment PED 2014/68/EU.

Manufactured according at productions checks as agreed with EN 3-10.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1000 V, at a minimum distance of 1 meter.

APPROVED/CERTIFIED FIRE EXTINGUISHER:









FIRE RATING:







55

233



File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
21095-7_Technical manual	Technical manual	21095-7	27/05/2025	S.R		3	1/3

21095-7: Portable Fire Extinguisher, 9 Kg ABC Powder

INSTALLATION

The installation must be carried out in accordance with the provisions in force in the country where the device is used.

• USE

MAINTENANCE

The commissioning and maintenance activities for maintaining efficiency must be carried out in accordance with the document **EPP_1_ENG** by qualified technical personnel and in compliance with the regulations in force in the country of use.

Any tampering or intervention carried out by unqualified personnel will void the product warranty. It is recommended to place the device in a dry place protected from atmospheric agents.

TECHNICAL SPECIFICATIONS


FIRE RATING	55 A 233 B C
EXTINGUISHING AGENT	ABC powder - MAP 20 % EPW 18462 (ABC Favorit Tertia - Rühl)
PROPELLANT	Dehumidified air or Nitrogen (N_2), 15 Bar at 20°C
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	9 Kg
FULL WEIGHT	~ 13,9 Kg
DIMENSIONS	Height (base - valve) 635 +/- 5 mm Diameter (cylinder) 170 +/- 2 mm
DISCHARGE TIME	~ 23,4 seconds
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	10,7 Liters
SAFETY DEVICE	Set between 20 and 26 bar
CYLINDER MATERIAL	Steel alloy
TREATMENT	Outside: Sandblast and powder painting, Ral 3000

PACKAGING


(Note: quantities and measurements are indicative and can be subject at changes)

STANDARD

Maximum nr. 40 pieces for pallet
(40 pieces for box, max 1 box for pallet)
Pallet dimensions 100x120x80(h) cm



ON REQUEST: SINGLE PACKAGING - maximum 40 pieces on pallet 100x120




TRANSPORT DISPOSAL

Land transport: Exemption for the purposes of ADR disposal 594 Ship Transport: IMDG Code - UN 1044 class 2.2 Fire Extinguishers

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
21095-7_Technical manual	Technical manual	21095-7	27/05/2025	S.R		3	2/3

21095-7: Portable Fire Extinguisher, 9 Kg ABC Powder

COMPONENTS AND SPARE PARTS LIST

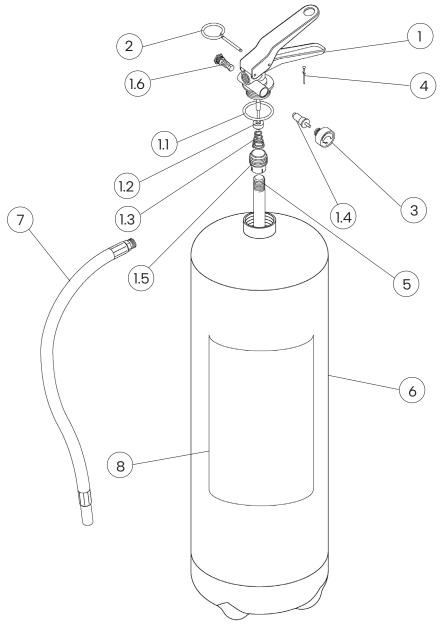

NUM.	DESCRIPTION	CODE
1	Valvola M. 30x1.5	0212-9
1.1	O-ring valve	0201R
1.2	Valve stem	n.a.
1.3	Internal spring of the valve	n.a.
1.4	Test valve for pressure gauge	1163
1.5	Dip tube holder	n.a.
1.6	Safety device	n.a.
2	Safety pin	0282-1
3	Pressure gauge	0271-1

NUM.	DESCRIPTION	CODE		
4	Safety pin seal	0285		
5	PVC dip tube	0155-1		
6	Cylinder	0105-7		
7	Hose	0292-4		
8	Label	0057-8		
OPTIONAL	Wall-mounted bracket for fire extinguisher with clip	3036		

The spare part at number 1 includes already all others components indicated from 1.1 to 1.6 "n.a." mean that the component is not available as single spare part

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
21095-7_Technical manual	Technical manual	21095-7	27/05/2025	S.R		3	3/3