

Technical Manual



SAFETY
FOR
FUTURE



www.emme-italia.com

Via del Molino, 40 - 52010 Corsalone (AR) - Italy - info@emme-italia.com - Tel. +39.0575.511320
P.IVA/ C.F. 11208251006 - R.E.A. AR-159122

21125-2 : Portable Fire Extinguisher, 12 Kg ABC Powder



CLIP DETAIL




- **CYLINDER**
In high-strength alloy steel, 3 pieces drawing, with clip, external powder painting Red Ral 3000.
- **EXTINGUISHING AGENT**
ABC Powder - MAP 20%.
- **PROPELLANT**
Dehumidified air or nitrogen (N₂).
- **VALVE**
M. 30x1.5, brass body, levers with red painting Ral 3000.
- **USE**
A B C fire rating
(solid materials, flammable liquids, flammable gas).

Note: image is for illustrative purpose only, the product purchased can has some difference

12 Kg powder fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 3-7 (D.M. 7.1.2005)**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment PED 2014/68/EU. Manufactured according at productions checks as agreed with **EN 3-10**. Quality Product certification guaranteed by Bureau Veritas Italia.
Suitable for use on fire involving electrical voltages up to 1'000 V, at a minimum distance of 1 meter.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



MPA
Dresden



EN 3-10
Inspection Certificate
N° 55840/21/NMJ/nmj



FIRE
RATING :



55



233



✓

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
21125-2_Technical manual	Technical manual	21125-2	27/05/2025	S.R		3	1/3

REPRODUCTION IS PROHIBITED

21125-2 : Portable Fire Extinguisher, 12 Kg ABC Powder

• INSTALLATION

The installation must be carried out in accordance with the provisions in force in the country where the device is used.

• USE

The commissioning and maintenance activities for maintaining efficiency must be

• MAINTENANCE

carried out in accordance with the document **EPP_1_ENG** by qualified technical personnel and in compliance with the regulations in force in the country of use.

Any tampering or intervention carried out by unqualified personnel will void the product warranty.

It is recommended to place the device in a dry place protected from atmospheric agents.

TECHNICAL SPECIFICATIONS


FIRE RATING	55 A 233 B C
EXTINGUISHING AGENT	ABC powder - MAP 20 % EPW 18462 (ABC Favorit Tertia - Rühl)
PROPELLANT	Dehumidified air or Nitrogen (N ₂), 15 Bar at 20°C
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	12 Kg
FULL WEIGHT	~ 17,7 Kg
DIMENSIONS	Height (base - valve) 610 +/- 5 mm Diameter (cylinder) 190 +/- 2 mm
DISCHARGE TIME	~ 29,6 seconds
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	12,5 Liters
SAFETY DEVICE	Set between 20 and 26 bar
CYLINDER MATERIAL	Steel alloy
TREATMENT	Outside: Sandblast and powder painting, Ral 3000

PACKAGING

(Note: quantities and measurements are indicative and can be subject at changes)

STANDARD

Maximum nr. 30 pieces for pallet
(30 pieces for box, max 1 box for pallet)
Pallet dimensions 100x120x75(h) cm

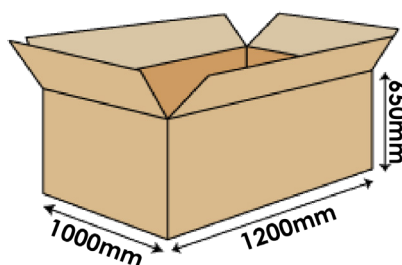


TRANSPORT DISPOSAL

Land transport : Exemption for the purposes of ADR disposal 594
Ship Transport : IMDG Code – UN 1044 class 2.2 Fire Extinguishers

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
21125-2_Technical manual	Technical manual	21125-2	27/05/2025	S.R		3	2/3

21125-2 : Portable Fire Extinguisher, 12 Kg ABC Powder

COMPONENTS AND SPARE PARTS LIST

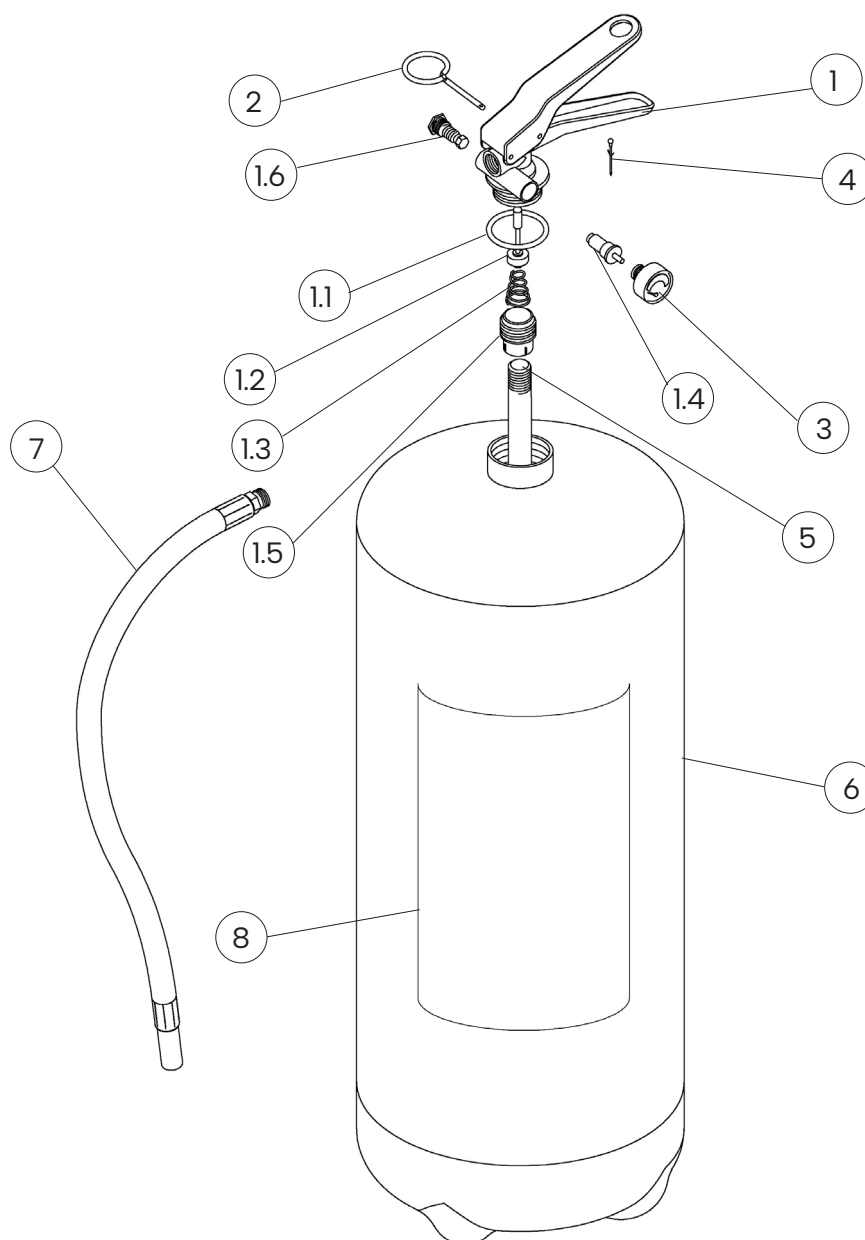

NUM.	DESCRIPTION	CODE
1	Valvola M. 30x1.5	0212
1.1	O-ring valve	0201R
1.2	Valve stem	0242R
1.3	Internal spring of the valve	0251R
1.4	Test valve for pressure gauge	1163
1.5	Dip tube holder	0253R
1.6	Safety device	0261R
2	Safety pin	0282-1
3	Pressure gauge	0271-1

NUM.	DESCRIPTION	CODE
4	Safety pin seal	0285
5	PVC dip tube	0155-2
6	Cylinder	0105-8
7	Hose	0292-4
8	Label	0059-2
OPTIONAL	Iron marine bracket red painting	0317
OPTIONAL	Wall-mounted bracket for fire extinguisher with clip	3036

The spare part at number 1 includes already all others components indicated from 1.1 to 1.6

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
21125-2_Technical manual	Technical manual	21125-2	27/05/2025	S.R		3	3/3