

Technical Manual



SAFETY
FOR
FUTURE



www.emme-italia.com

Via del Molino, 40 - 52010 Corsalene (AR) - Italy - info@emme-italia.com - Tel. +39.0575.511320
P.IVA/ C.F. 11208251006 - R.E.A. AR-159122

DOLOMITI 6 - 22063-3 : Portable Fire Extinguisher, 6 L Foam



CLIP DETAIL



FROST RESISTANCE
(UP TO -30°C)




SUITABLE ON
POLAR SOLVENTS

- **CYLINDER**
In high-strength alloy steel, with clip, deep drawing, external powder painting Red Ral 3000.
- **EXTINGUISHING AGENT**
Water-based foam.
- **PROPELLANT**
Dehumidified air or Nitrogen (N₂).
- **VALVE**
CPF M. 30x1.5, brass body, with anti-corrosion treatment.
- **USE**
A B F fire rating
(solid materials, flammable liquids, cooking oils).

Note: image is for illustrative purpose only, the product purchased can has some difference

6 L foam fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 3-7 (D.M. 7.1.2005)**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment PED 2014/68/EU. Manufactured according at productions checks as agreed with **EN 3-10**. Quality Product certification guaranteed by Bureau Veritas Italia. Suitable for use on fire involving electrical voltages up to 1'000 V, at a minimum distance of 1 meter.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



FIRE
RATING :



34

233

75

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
22063-3 DOLOMITI 6_Technical manual	Technical manual	DOLOMITI 6 22063-3	28/05/2025	S.R		3	2/3

REPRODUCTION IS PROHIBITED

DOLOMITI 6 – 22063-3 : Portable Fire Extinguisher, 6 L Foam

• INSTALLATION

The installation must be carried out in accordance with the provisions in force in the country where the device is used.

• USE

The commissioning and maintenance activities for maintaining efficiency must be

• MAINTENANCE

carried out in accordance with the document **PSP_1_ENG** by qualified technical personnel and in compliance with the regulations in force in the country of use.

Any tampering or intervention carried out by unqualified personnel will void the product warranty.

It is recommended to place the device in a dry place protected from atmospheric agents.

TECHNICAL SPECIFICATIONS


FIRE RATING	34 A 233 B 75 F
EXTINGUISHING AGENT	Foam EW-30 (100 % Premix MG6 -30)
PROPELLANT	Dehumidified air or Nitrogen (N ₂), 15 Bar at 20°C
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	6 Liters
FULL WEIGHT	~ 10,45 Kg
DIMENSIONS	Height (base - valve) 540 +/- 5 mm Diameter (cylinder) 160 +/- 2 mm
DISCHARGE TIME	~ 27,6 seconds
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	7,5 Liters
SAFETY DEVICE	Set between 20 and 24 bar
CYLINDER MATERIAL	Alloy steel
TREATMENT	Outside: Sandblast and powder painting Ral 3000 Inside: Plastic coating

PACKAGING

(Note: quantities and measurements are indicative and can be subject at changes)


STANDARD

Maximum nr. 100 pieces for pallet
(44 pieces for box, max 2 boxes for pallet)
(12 pieces. single packaging)
Pallet dimensions 100x120x160(h) cm

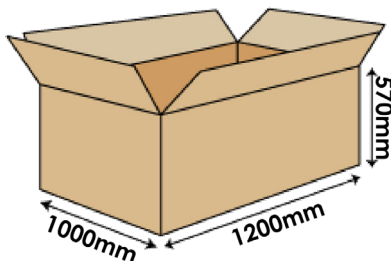

ON REQUEST: SINGLE PACKAGING

– maximum 64 pieces on pallet 100x120
– maximum 48 pieces on pallet 80x120



TRANSPORT DISPOSAL


Land transport : Exemption for the purposes of ADR disposal 594

Ship Transport : IMDG Code – UN 1044 class 2.2 Fire Extinguishers

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
22063-3 DOLOMITI 6_Technical manual	Technical manual	DOLOMITI 6 22063-3	28/05/2025	S.R		3	2/3

DOLOMITI 6 – 22063-3 : Portable Fire Extinguisher, 6 L Foam

COMPONENTS AND SPARE PARTS LIST

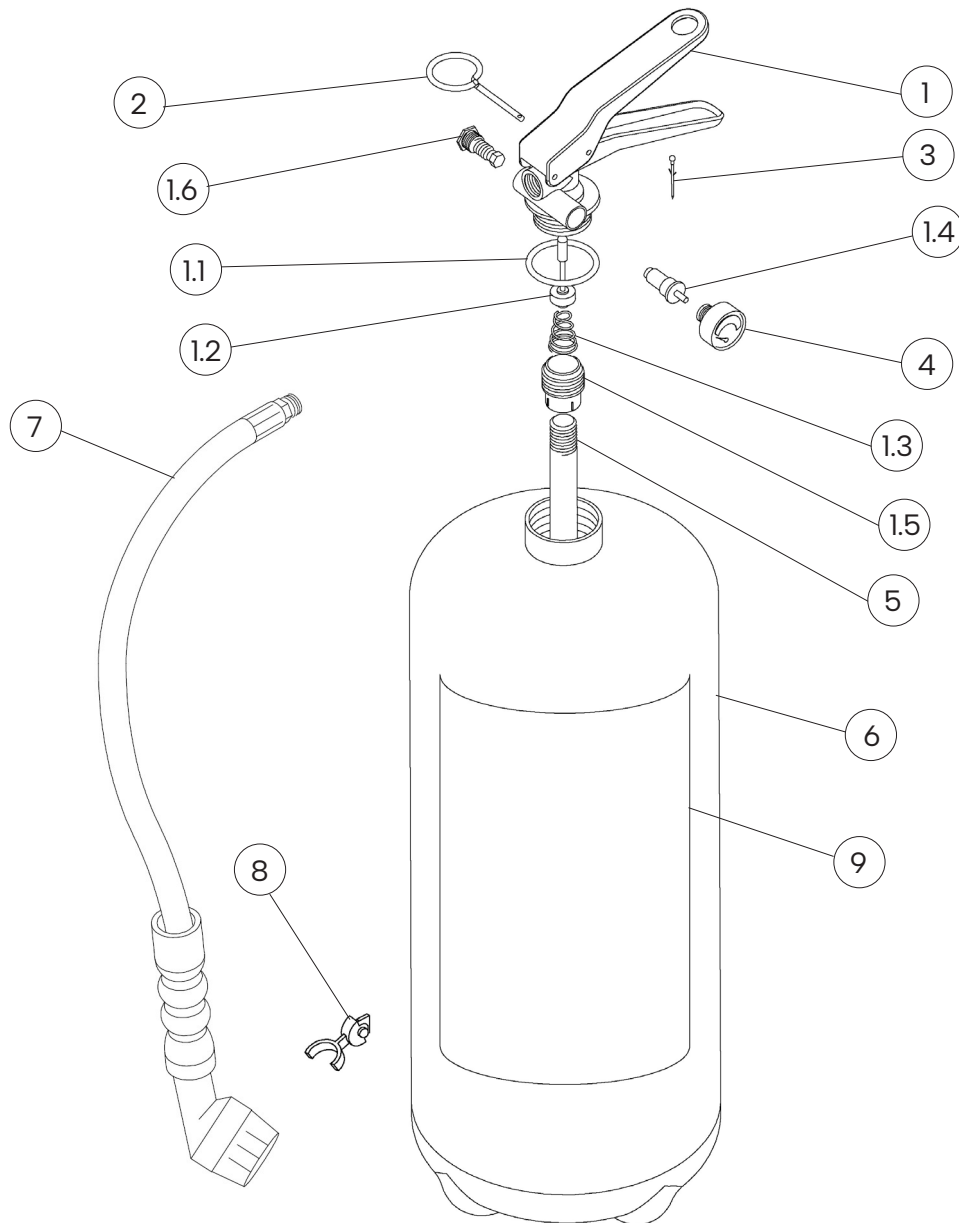

NUM.	DESCRIPTION	CODE
1	Valve M. 30x1.5	0212CS
1.1	O-ring valve	0201C
1.2	Valve stem	0242C
1.3	Internal spring of the valve	0251C
1.4	Test valve for pressure gauge	1163C
1.5	Dip tube holder	0253C
1.6	Safety device	0261C
2	Safety pin	0282-1
3	Safety pin seal	0285
4	Pressure gauge	1576

NUM.	DESCRIPTION	CODE
5	PVC dip tube	0154
6	Cylinder	0112-3
7	Hose with dispensing nozzle	0293-21
8	Magnet stop hose	0301-1
9	Label	1577-3
OPTIONAL	Iron marine bracket red painting	0316
OPTIONAL	Stainless steel marine bracket	1464
OPTIONAL	Wall-mounted bracket for fire extinguisher with clip	3036
	Foam refill (6 L. bottle, ready to use)	1623

The spare part at number 1 includes already all others components indicated from 1.1 to 1.6

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
22063-3 DOLOMITI 6_Technical manual	Technical manual	DOLOMITI 6 22063-3	28/05/2025	S.R		3	3/3