

Technical Manual



SAFETY
FOR
FUTURE



www.emme-italia.com

Via del Molino, 40 - 52010 Corsalone (AR) - Italy - info@emme-italia.com - Tel. +39.0575.511320
P.IVA/ C.F. 11208251006 - R.E.A. AR-159122

GW6P58X 22066-720 : Portable Fire Extinguisher, 6 L Foam



FLUORINE FREE

CLIP DETAIL



- **CYLINDER**
Stainless steel, 3 pieces drawing, with clip, external powder painting Red Ral 3000.
- **EXTINGUISHING AGENT**
Fluorine free foam, water based.
- **PROPELLANT**
Nitrogen (N₂).
- **VALVE**
M. 58x2, lightweight aluminum alloy AA6061 body, with external device for pressure check, levers with green painting Ral 6018.
- **USE**
A B F fire rating
(solid materials, flammable liquids, cooking oils).

REPRODUCTION IS PROHIBITED

Note: image is for illustrative purpose only, the product purchased can has some difference

6 L foam fire extinguisher, temperature range from +5°C to +60°C, manufactured in accordance to **UNI EN 3-7**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment PED 2014/68/EU. Manufactured according at productions checks as agreed with **EN 3-10**. Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a minimum distance of 1 meter.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



FIRE
RATING :



File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
22066-720_GW6P58X_Technical manual	Technical manual	GW6P58X_22066-720	30/05/25	S.R.		3	1/3

GW6P58X 22066-720 : Portable Fire Extinguisher, 6 L Foam

- **INSTALLATION**
- **USE**
- **MAINTENANCE**

The installation must be carried out in accordance with the provisions in force in the country where the device is used.

The commissioning and maintenance activities for maintaining efficiency must be carried out in accordance with the document **PSP_1_ENG** by qualified technical personnel and in compliance with the regulations in force in the country of use.

Any tampering or intervention carried out by unqualified personnel will void the product warranty.

It is recommended to place the device in a dry place protected from atmospheric agents.

TECHNICAL SPECIFICATIONS


FIRE RATING	27 A 144 B 40 F
EXTINGUISHING AGENT	100% Green Wave Premix
PROPELLANT	Nitrogen (N ₂), 15 Bar at 20°C
TEMPERATURE RANGE	+5°C / +60°C
NOMINAL CHARGE	6 Liters
FULL WEIGHT	~ 8,65 Kg
DIMENSIONS	Height 550 (base - valve) +/- 5 mm Diameter (cylinder) 160 +/- 2 mm
DISCHARGE TIME	~ ____ seconds
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	7,80 L
SAFETY DEVICE	Set between 22 and 27 bar
CYLINDER MATERIAL	Stainless steel Aisi 304
TREATMENT	Outside: Sandblast and powder painting Ral 3000

PACKAGING

(Note: quantities and measurements are indicative and can be subject at changes)


STANDARD

Maximum nr. 100 pieces for pallet
(44 pieces for box, max 2 boxes for pallet)
(12 pieces. single packaging)
Pallet dimensions 100x120x160(h) cm

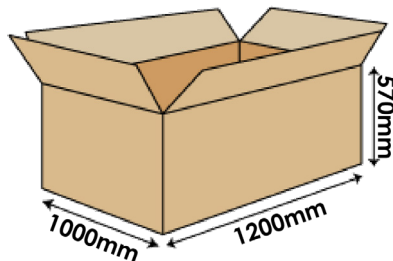

ON REQUEST: SINGLE PACKAGING

- maximum 64 pieces on pallet 100x120
- maximum 48 pieces on pallet 80x120



TRANSPORT DISPOSAL


Land transport : Exemption for the purposes of ADR disposal 594

Ship Transport : IMDG Code – UN 1044 class 2.2 Fire Extinguishers

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
22066-720_GW6P58X_Technical manual	Technical manual	GW6P58X_22066-720	30/05/25	S.R.		3	2/3

GW6P58X 22066-720 : Portable Fire Extinguisher, 6 L Foam

COMPONENTS AND SPARE PARTS LIST

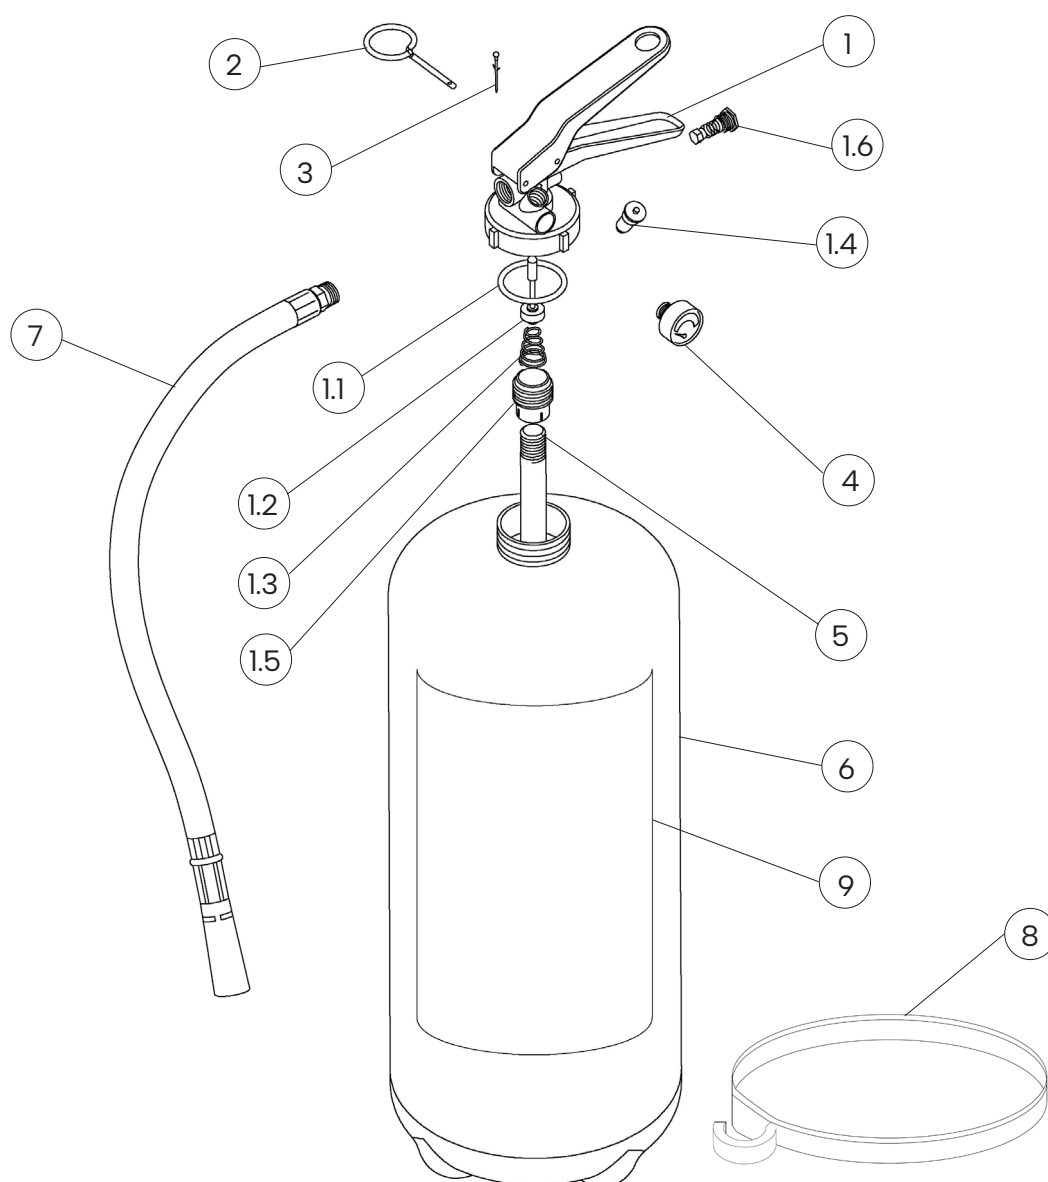

NUM.	DESCRIPTION	CODE
1	Valve M. 58x2	0212-52
1.1	O-ring valve	0201-4
1.2	Valve stem	n.a.
1.3	Internal spring of the valve	n.a.
1.4	Test valve for pressure gauge	1163
1.5	Dip tube holder	n.a.
1.6	Safety device	n.a.
2	Safety pin	0282-1
3	Safety pin seal	0285

NUM.	DESCRIPTION	CODE
4	Pressure gauge	1576
5	PVC dip tube with filter	0154F
6	Cylinder	1529-2
7	Hose with dispensing nozzle	2296-2V
8	Stop hose ring	0301
9	Label	0083-720
OPTIONAL	Wall-mounted bracket for fire extinguisher with clip	3036

The spare part at number 1 includes already all others components indicated from 1.1 to 1.6
 "n.a." mean that the component is not available as single spare part

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
22066-720_GW6P58X_Technical manual	Technical manual	GW6P58X_22066-720	30/05/25	S.R.		3	3/3