Technical Manual





www.emme-italia.com

Via del Molino, 40 - 52010 Corsalone (AR) - Italy - info@emme-italia.com - Tel. +39.0575.511320 P.IVA/ C.F. 11208251006 - R.E.A. AR-159122

22094-2: Portable Fire Extinguisher, 9 L Foam





CYLINDER
In high-strength all

3 pieces drawing, external powder painting Red Ral 3000.

- EXTINGUISHING AGENT Water-based foam.
- PROPELLANT Dehumidified air or Nitrogen (N_2).
- VALVE CPF M. 30x1.5, brass body, with anti-corrosion treatment.
- USE
 A B F fire rating
 (solid materials, flammable liquids, cooking oils).

Note: image is for illustrative purpose only, the product purchased can has some difference

9 L foam fire extinguisher, temperature range from 0°C to +60°C, manufactured in accordance to **UNI EN 3-7**, certified according to the directive for pressure equipment PED 2014/68/EU.

Manufactured according at productions checks as agreed with EN 3-10.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a minimum distance of 1 meter.

APPROVED/CERTIFIED FIRE EXTINGUISHER:







FIRE RATING :







43

233

40

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
22094-2_Technical manual	Technical manual	22094-2	28/05/2025	S.R		3	2/3

REPRODUCTION IS PROHIBITED

22094-2: Portable Fire Extinguisher, 9 L Foam

INSTALLATION

The installation must be carried out in accordance with the provisions in force in the country where the device is used.

• USE

MAINTENANCE

The commissioning and maintenance activities for maintaining efficiency must be carried out in accordance with the document **PSP_1_ENG** by qualified technical personnel and in compliance with the regulations in force in the country of use.

Any tampering or intervention carried out by unqualified personnel will void the product warranty. It is recommended to place the device in a dry place protected from atmospheric agents.

TECHNICAL SPECIFICATIONS

FIRE RATING	43 A 233 B 40 F
EXTINGUISHING AGENT	Foam EWAB15 (2 % SC-6 + 10 % Inilam AX + 88 % Water) (* Hyper-filtered water with an osmosis process)
PROPELLANT	Dehumidified air or Nitrogen (N ₂), 15 Bar at 20°C
TEMPERATURE RANGE	0°C / +60°C
NOMINAL CHARGE	9 Liters
FULL WEIGHT	~ 14,05 Kg
DIMENSIONS	Height (base - valve) 635 +/- 5 mm Diameter (cylinder) 170 +/- 2 mm
DISCHARGE TIME	~ 62,1 seconds
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	10,7 Liters
SAFETY DEVICE	Set between 20 and 24 bar
CYLINDER MATERIAL	Steel alloy
TREATMENT	Outside: Sandblast and powder painting Ral 3000 Inside: Plastic coating


PACKAGING


(Note: quantities and measurements are indicative and can be subject at changes)

STANDARD

Maximum nr. 40 pieces for pallet (40 pieces for box, max 1 box for pallet) Pallet dimensions 100x120x80(h) cm

ON REQUEST: SINGLE PACKAGING - maximum 40 pieces on pallet 100x120






TRANSPORT DISPOSAL

Land transport: Exemption for the purposes of ADR disposal 594 Ship Transport: IMDG Code - UN 1044 class 2.2 Fire Extinguishers

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
22094-2_Technical manual	Technical manual	22094-2	28/05/2025	S.R		3	2/3

22094-2: Portable Fire Extinguisher, 9 L Foam

COMPONENTS AND SPARE PARTS LIST

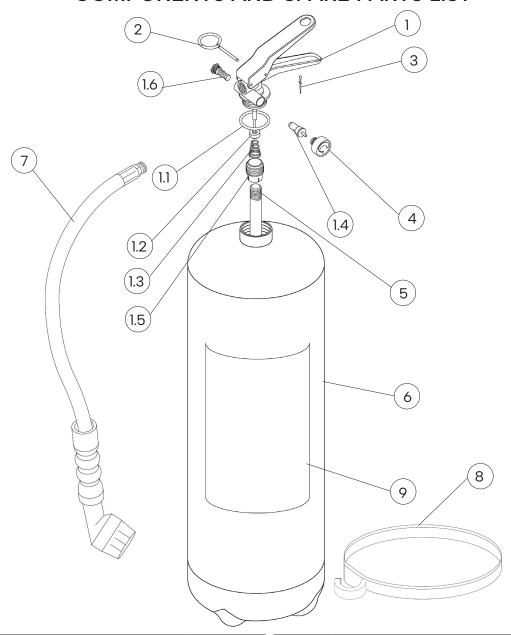

NUM.	DESCRIPTION	CODE
1	Valve M. 30x1.5	0212CS
1.1	O-ring valve	0201C
1.2	Valve stem	0242C
1.3	Internal spring of the valve	0251C
1.4	Test valve for pressure gauge	1163C
1.5	Dip tube holder	0253C
1.6	Safety device	0261C
2	Safety pin	0282-1
3	Safety pin seal	0285
4	Pressure gauge	1576

NUM.	DESCRIPTION	CODE		
5	PVC dip tube	0155-1		
6	Cylinder	0111-2		
7	Hose with dispensing nozzle	0293-6		
8	Stop hose ring	1907		
9	Label	0077-6		
OPTIONAL	Wall-mounted bracket for fire extinguisher with clip	3036		
	Foam refill (9 L bottle, ready to use)	2055-1		

The spare part at number 1 includes already all others components indicated from 1.1 to 1.6

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
22094-2_Technical manual	Technical manual	22094-2	28/05/2025	S.R		3	3/3