

Technical Manual



SAFETY
FOR
FUTURE



www.emme-italia.com

Via del Molino, 40 - 52010 Corsalone (AR) - Italy - info@emme-italia.com - Tel. +39.0575.511320
P.IVA/ C.F. 11208251006 - R.E.A. AR-159122

GW9Plus 22095-500 : Portable Fire Extinguisher, 9 L Foam



FLUORINE FREE

CLIP DETAIL




- **CYLINDER**
In high-strength alloy steel, with clip 3 pieces drawing, external powder painting Red Ral 3000.
- **EXTINGUISHING AGENT**
Fluorine free foam, water based.
- **PROPELLANT**
Nitrogen (N₂).
- **VALVE**
M. 30x1.5, brass body, levers with green painting Ral 6018.
- **USE**
A F fire rating
(solid materials, cooking oils).

Note: image is for illustrative purpose only, the product purchased can has some difference

9 L foam fire extinguisher, temperature range from +0°C to +60°C, manufactured in accordance to **UNI EN 3-7**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment PED 2014/68/EU. Manufactured according to production checks as agreed with **EN 3-10**. Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a minimum distance of 1 meter.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



FIRE
RATING :



55



75

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
22095-500_GW9Plus_Technical manual	Technical manual	GW9Plus_22095-500	30/05/25	S.R.		3	1/3

REPRODUCTION IS PROHIBITED

GW9Plus 22095-500 : Portable Fire Extinguisher, 9 L Foam

- **INSTALLATION** The installation must be carried out in accordance with the provisions in force in the country where the device is used.
- **USE** The commissioning and maintenance activities for maintaining efficiency must be carried out in accordance with the document **PSP_1_ENG** by qualified technical
- **MAINTENANCE** Any tampering or intervention carried out by unqualified personnel will void the product warranty. It is recommended to place the device in a dry place protected from atmospheric agents.

TECHNICAL SPECIFICATIONS


FIRE RATING	55 A 75 F
EXTINGUISHING AGENT	100% Green Wave Plus Premix
PROPELLANT	Nitrogen (N ₂), 15 Bar at 20°C
TEMPERATURE RANGE	+0°C / +60°C
NOMINAL CHARGE	9 Liters
FULL WEIGHT	~ 14,0 Kg
DIMENSIONS	Height 635 (base - valve) +/- 5 mm Diameter (cylinder) 170 +/- 2 mm
DISCHARGE TIME	~ 63,1 seconds
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	10,70 L
SAFETY DEVICE	Set between 20 and 26 bar
CYLINDER MATERIAL	Alloy steel
TREATMENT	Outside: Sandblast and powder painting, Ral 3000 Inside: Plastic coating

PACKAGING

(Note: quantities and measurements are indicative and can be subject at changes)


STANDARD

Maximum nr. 40 pieces for pallet
(40 pieces for box, max 1 box for pallet)
Pallet dimensions 100x120x80(h) cm

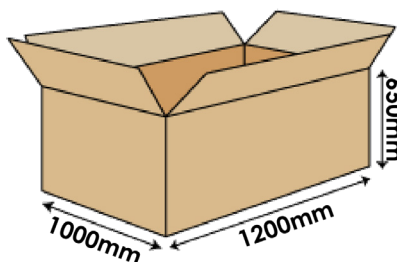

ON REQUEST: SINGLE PACKAGING

- maximum 40 pieces on pallet 100x120




TRANSPORT DISPOSAL

Land transport : Exemption for the purposes of ADR disposal 594
Ship Transport : IMDG Code - UN 1044 class 2.2 Fire Extinguishers

File name	Type of document	Fire Extinguisher Model	Date	Rel.	Check	Rev.	Pag.
22095-500_GW9Plus_Technical manual	Technical manual	GW9Plus_22095-500	30/05/25	S.R.		3	2/3

GW9Plus 22095-500 : Portable Fire Extinguisher, 9 L Foam

COMPONENTS AND SPARE PARTS LIST

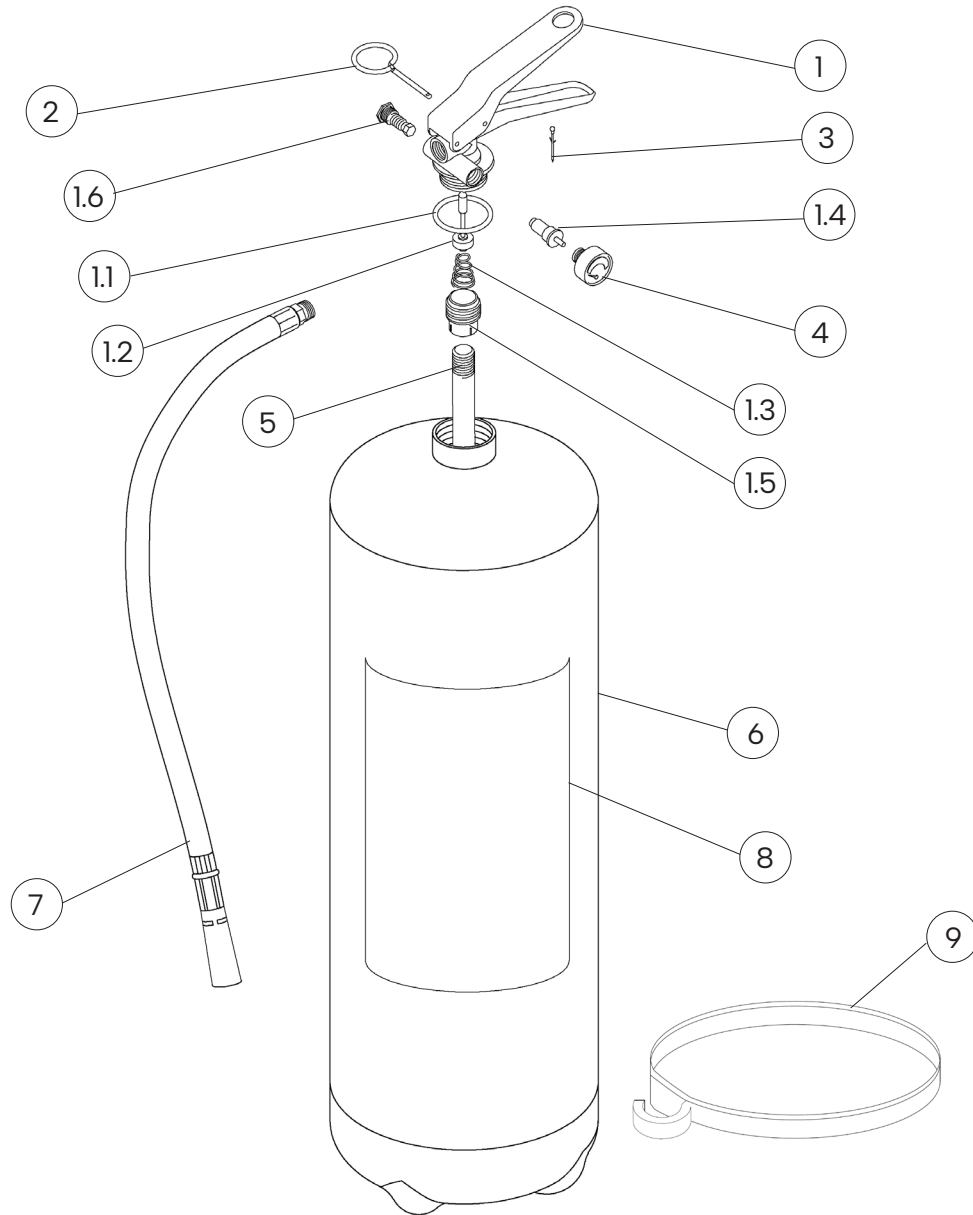

NUM.	DESCRIPTION	CODE
1	Valve M. 30x1.5	0212FV
1.1	O-ring valve	0201R
1.2	Valve stem	0242R
1.3	Internal spring of the valve	0251R
1.4	Test valve for pressure gauge	1163
1.5	Dip tube holder	0253R
1.6	Safety device	0261R
2	Safety pin	0282-1
3	Safety pin seal	0285

NUM.	DESCRIPTION	CODE
4	Pressure gauge	1576
5	PVC dip tube with filter	0155F
6	Cylinder	0111-2
7	Hose with dispensing nozzle	2298-3V
8	Label	0077-750
9	Stop hose band	1907
OPTIONAL	Wall-mounted bracket for fire extinguisher with clip	3036

The spare part at number 1 includes already all others components indicated from 1.1 to 1.6

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
22095-500_GW9Plus_Technical manual	Technical manual	GW9Plus_22095-500	30/05/25	S.R.		3	3/3