

# Technical Manual



www.emme-italia.com

Via del Molino, 40 - 52010 Corsalone (AR) - Italy - info@emme-italia.com - Tel. +39.0575.511320  
P.IVA/ C.F. 11208251006 - R.E.A. AR-159122

## 25069 : Portable Fire Extinguisher, 6 Kg D Powder



- **CYLINDER**  
In high-strength alloy steel, 3 pieces drawing, external powder painting Red Ral 3000.
- **EXTINGUISHING AGENT**  
D Powder.
- **PROPELLANT**  
Dehumidified air or nitrogen (N<sub>2</sub>).
- **VALVE**  
M. 30x1.5, brass body, levers with red painting Ral 3000.
- **USE**  
D fire rating  
(fires arising from metals).

Note: image is for illustrative purpose only, the product purchased can has some difference

6 Kg powder fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 3-7**, certified according to the directive for pressure equipment PED 2014/68/EU.

Manufactured according at productions checks as agreed with **EN 3-10**.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a minimum distance of 1 meter.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE  
RATING :**



REPRODUCTION IS PROHIBITED

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
25069_Technical manual	Technical manual	25069	27/05/2025	S.R		3	1/3

# 25069 : Portable Fire Extinguisher, 6 Kg D Powder

## • INSTALLATION

The installation must be carried out in accordance with the provisions in force in the country where the device is used.

## • USE

The commissioning and maintenance activities for maintaining efficiency must be

## • MAINTENANCE

carried out in accordance with the document **EPP\_1\_ENG** by qualified technical personnel and in compliance with the regulations in force in the country of use.

Any tampering or intervention carried out by unqualified personnel will void the product warranty.

It is recommended to place the device in a dry place protected from atmospheric agents.

## TECHNICAL SPECIFICATIONS


FIRE RATING	D
EXTINGUISHING AGENT	D powder
PROPELLANT	Dehumidified air or Nitrogen (N <sub>2</sub> ), 15 Bar at 20°C
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	6 Kg
FULL WEIGHT	~ 10 Kg
DIMENSIONS	Height (base - valve) 510 +/- 5 mm Diameter (cylinder) 160 +/- 2 mm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	7,3 L
SAFETY DEVICE	Set between 20 and 24 bar
CYLINDER MATERIAL	Alloy steel
TREATMENT	Outside: Sandblast and powder painting, Ral 3000

## PACKAGING

(Note: quantities and measurements are indicative and can be subject at changes)


### STANDARD

Maximum nr. 100 pieces for pallet  
(44 pieces for box, max 2 boxes for pallet)  
(12 pieces in single boxes)  
Pallet dimensions 100x120x160(h) cm

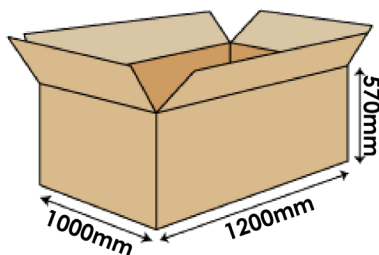

### ON REQUEST: SINGLE PACKAGING

- Maximum nr. 64 pieces for pallet 100x120  
- Maximum nr. 48 pieces for pallet 80x120



## TRANSPORT DISPOSAL


Land transport : Exemption for the purposes of ADR disposal 594

Ship Transport : IMDG Code – UN 1044 class 2.2 Fire Extinguishers

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
25069_Technical manual	Technical manual	25069	27/05/2025	S.R		3	2/3

# 25069 : Portable Fire Extinguisher, 6 Kg D Powder

## COMPONENTS AND SPARE PARTS LIST

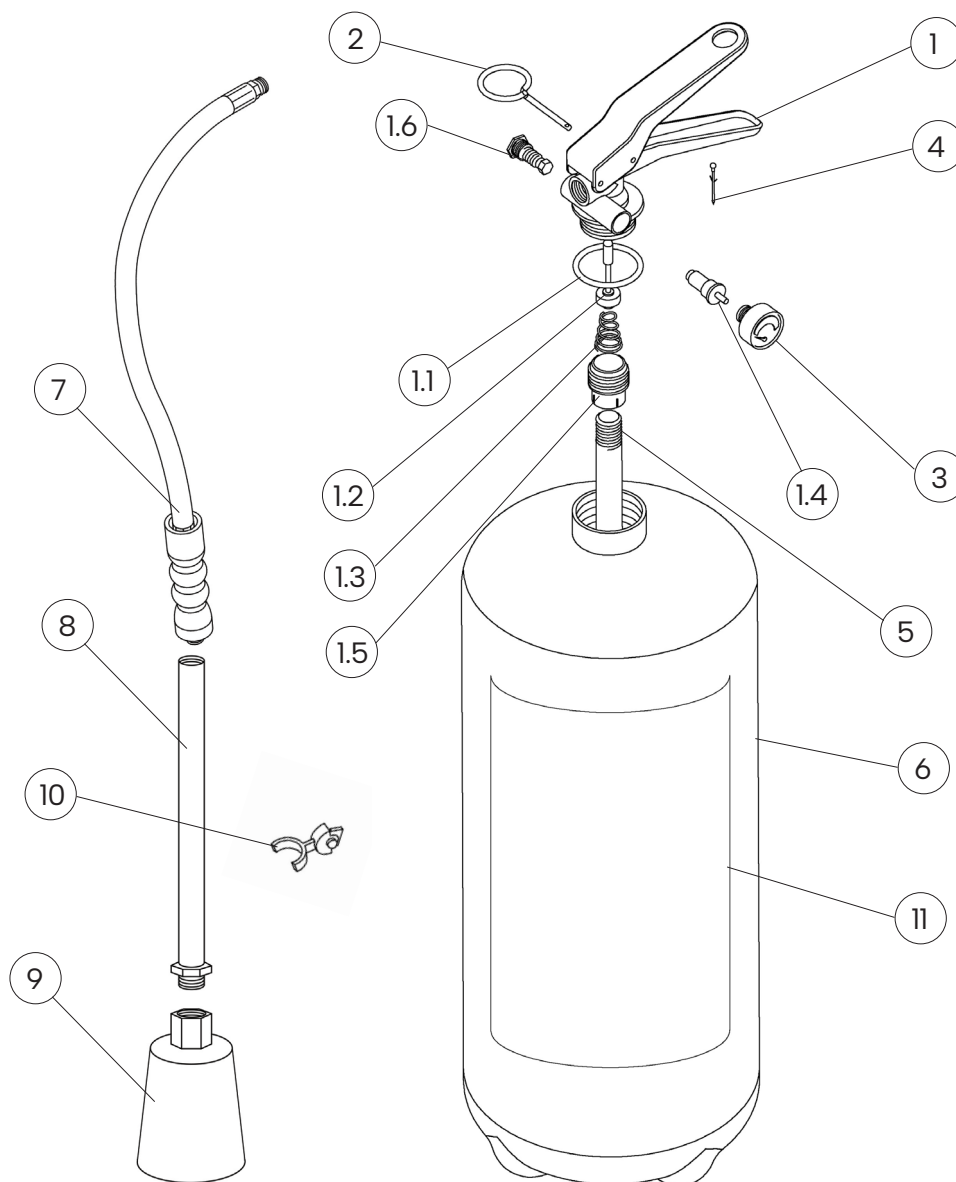

NUM.	DESCRIPTION	CODE
1	Valve M. 30x1.5	0212C
1.1	O-ring valve	0201C
1.2	Valve stem	0242C
1.3	Internal spring of the valve	0251C
1.4	Test valve for pressure gauge	1163C
1.5	Dip tube holder	0253C
1.6	Safety device	0261C
2	Safety pin	0282-1
3	Pressure gauge	0271-1
4	Safety pin seal	0285

NUM.	DESCRIPTION	CODE
5	PVC dip tube	1859
6	Cylinder	1848K
7	Hose	SL0293
8	Steel tube	1778-2
9	Dispensing horn	2259-41
10	Magnet stop hose	0301-1
11	Label	1943

The spare part at number 1 includes already all others components indicated from 1.1 to 1.6

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
25069_Technical manual	Technical manual	25069	27/05/2025	S.R		3	3/3