



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

21010

1Kg Powder FIRE EXTINGUISHER



- **CYLINDER**
Deep drawing alloy steel, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
ABC powder.
- **PROPELLANT**
Dehumidified air or N2.
- **VALVE**
Brass M 30X1.5, levers with red painting RAL3000.
- **USE**
A B C fire rating
(solid materials, flammable liquids, flammable gas).
- **BRACKET**
Iron wire in standard equipment.

1Kg powder fire extinguisher, temperature range from -20°C to +60°C, manufactured in accordance to EN 3-7, approved to European Marine Directive MED 2014/90/EU, S.O.L.A.S. (Safety of life at sea) '74 (2000), certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving voltages of up to 1000 volts.

AVAILABLE VERSIONS



N.	CODE	DESCRIPTION
1	26010	1kg powder fire extinguisher, complies MED 2014/90/EU

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



8



34



✓

21010


1Kg Powder FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	8 A 34 B C
EXTINGUISHING AGENT	EPB 0351 powder
PROPELLANT	Dehumidified air or N2, 15 Bar at 20°C
TEMPERATURE RANGE	-20°C +60°C
NOMINAL CHARGE	1 Kg
FULL WEIGHT	~ 2,1 Kg
DIMENSIONS	Height 338 mm Diameter 85 mm
DISCHARGE TIME	6,5 sec.
MAX VALVE TIGHTENING	Between 40 and 50 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	1,25 L.
SAFETY VALVE	Set 20 and 26 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour


PACKAGING

STANDARD :
minimum box nr. 10 pieces
max 40 boxes for pallet 100x120 (400 p.)

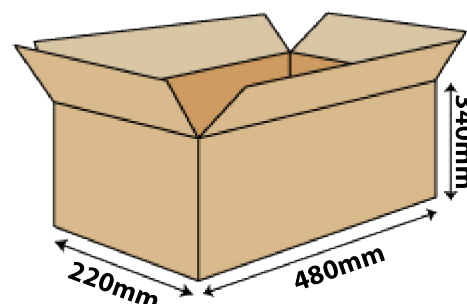

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the norm in use in utilization country.

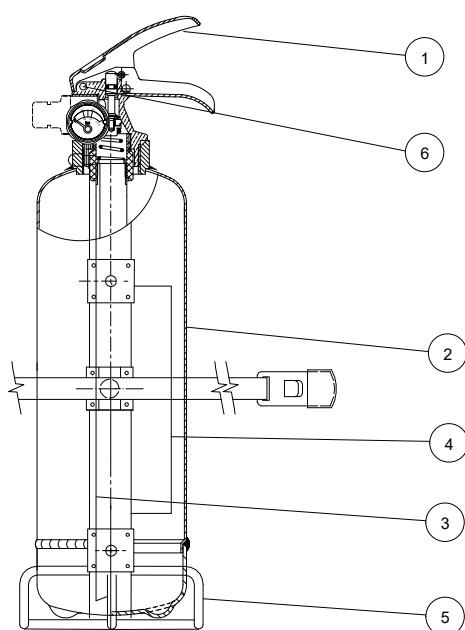

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M 30 X 1.5	0211
2	Cylinder	0101
3	PVC dip tube	0151
4	Label	0051
5	Iron wire bracket	0326
6	Safety pin	0281
	Safety valve	0261
	Safety pin seal	0285
	ABC powder	0351

EMME ANTINCENDIO S.r.l

Factory: Via del Molino, 40 – 52010 Corsalone (AR) – Italy – Tel. +39.0575.511320
Warehouse: Via G. Di Vittorio, 11 – 20017 Mazzo di Rho (MI) – Italy – Tel. +39.0293900399
E-mail: info@emme-italia.com – web site: www.emme-italia.com
P.IVA/ C.F. 11208251006 – R.E.A. FI-632545

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_21010	21010	03/01/18	M.R		1	2