



EMME ANTINCENDIO S.r.l.  
www.emme-italia.com

21095-1

## 9Kg Powder FIRE EXTINGUISHER



- **CYLINDER**  
Deep drawing alloy steel, epoxy polyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**  
ABC powder.
- **PROPELLANT**  
Dehumidified air or N2.
- **VALVE**  
Brass M 30X1.5, levers with red painting RAL3000.
- **USE**  
A B C fire rating (solid materials, flammable liquids, flammable gas).
- **BRACKET**  
Wall-mounted in standard equipment.

9Kg powder fire extinguisher, temperature range from -20°C to +60°C, manufactured in accordance to **EN 3-7**, approved to European Marine Directive **MED 2014/90/EU, S.O.L.A.S.** (Safety of life at sea) '74 (2000), certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving voltages of up to 1000 volts.

### AVAILABLE VERSIONS



N.	CODICE	DESCRIZIONE
1	26095	9kg powder fire extinguisher, complies <b>MED 2014/90/EU</b>

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE RATING :**



## 9Kg Powder FIRE EXTINGUISHER



### TECHNICAL SPECIFICATIONS

FIRE RATING	55 A 233 B C
EXTINGUISHING AGENT	EPB 0351 powder
PROPELLANT	Dehumidified air or N2, 15 Bar at 20°C
TEMPERATURE RANGE	-20°C +60°C
NOMINAL CHARGE	9 Kg
FULL WEIGHT	~ 14 Kg
DIMENSIONS	Height 690 mm Diameter 180 mm
DISCHARGE TIME	18 sec.
MAX VALVE TIGHTENING	Between 40 and 50 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	13,7 L.
SAFETY VALVE	Set 20 and 26 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxy polyestere powder painting, Red Ral 3000 colour

### PACKAGING

STANDARD :

nr. 35 pieces for box, max 2 boxes for pallet  
100x120x160 (35+35)

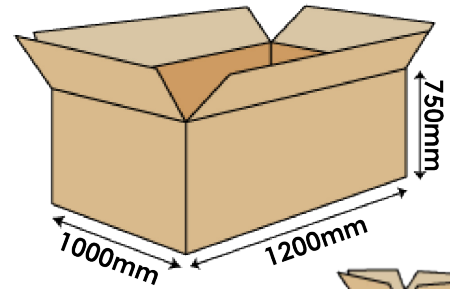


SINGLE PACKAGING  
ON REQUEST:

nr. 40 pieces  
for pallet 100x120

### MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the norm in use in utilization country.

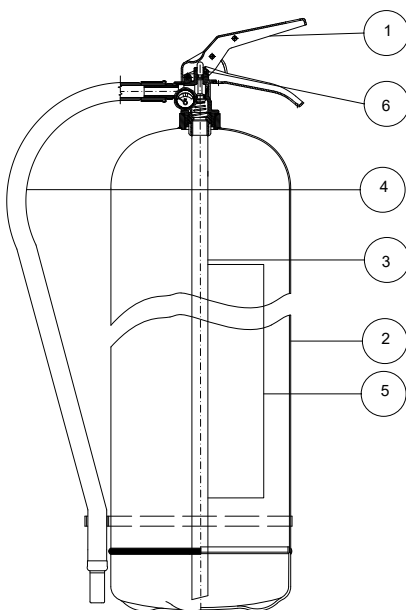

### SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M 30 X 1.5	0212
2	Cylinder	0106
3	PVC dip tube	0156
4	Hose	0292-4
5	Label	0058
6	Safety pin	0282-1
	Safety valve	0261
	Safety pin seal	0285
	ABC powder	0351
OPTIONAL	Iron marine bracket red painting	0318
OPTIONAL	Stainless steel marine bracket	0325

### EMME ANTINCENDIO S.r.l

Factory: Via del Molino, 40 – 52010 Corsalone (AR) – Italy – Tel. +39.0575.511320  
Warehouse MI: Via G. Di Vittorio, 11 – 20017 Mazzo di Rho (MI) – Italy – Tel. +39.0293900399  
Warehouse PD: Via Polonia, 35 – 35127 Padova (PD) - Italy - Tel. +39.049.6453824  
E-mail: [info@emme-italia.com](mailto:info@emme-italia.com) – web site: [www.emme-italia.com](http://www.emme-italia.com)  
P.IVA/ C.F. 11208251006 – R.E.A. FI-632545

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_21095-1 veneto9	21095-1	08/10/18	M.R		1	2