



EMME ANTINCENDIO S.r.l.
www.emme-italia.com

24095

9Kg Powder FIRE EXTINGUISHER



- **CYLINDER**
Alloy steel, 3 pieces, epoxy polyester powder painting, Red Ral 3000
- **EXTINGUISHING AGENT**
ABC powder.
- **PROPELLANT**
Fire extinguisher pressurized at moment of use with gr.200 CO2 cartridge .
- **VALVE**
Aluminum percussion valve M 74 x 2.
- **USE**
A B C fire rating
(solid materials, flammable liquids, flammable gas).
- **BRACKET**
Wall-mounted red painting and PELD base, in standard equipment.

9Kg powder fire extinguisher, pressurized at moment of use, temperature range from -30°C to +60°C, manufactured in accordance to EN 3-7:2008, certified according to the directive for pressure equipment PED 2014/68/EU. Quality Product certification guaranteed by Bureau Veritas Italia. Suitable for use on fire involving voltages of up to 1000 volts.

APPROVED/CERTIFIED FIRE EXTINGUISHER



FIRE RATING :



© REPRODUCTION IS PROHIBITED

24095


9Kg Powder FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	55 A 233 B C
EXTINGUISHING AGENT	EPW 18462 powder
PROPELLANT	Internal cartridge gr 200 CO2
TEMPERATURE RANGE	-30°C +60°C
NOMINAL CHARGE	9 Kg
FULL WEIGHT	~ 15 Kg
DIMENSIONS	Height 555 mm Diameter 182 mm
DISCHARGE TIME	24,5 sec.
DISCHARGE TIME	Between 35 and 45 Nm
CYLINDER PRESSURE TEST	PT 30 bar
CYLINDER VOLUME	10,3 L.
SAFETY VALVE	Set 24 +/- 2 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxy polyestere powder painting, Red Ral 3000 colour


PACKAGING

STANDARD :
nr. 30 pieces for pallet 100x120
in single packaging

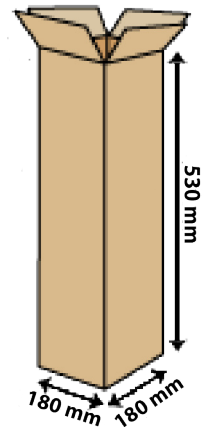

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the norm in use in utilization country.

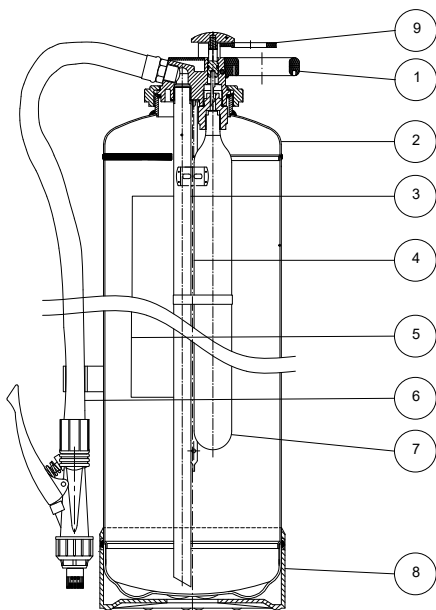

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M 74 X 2	3008-1
2	Cylinder	3009
3	PVC dip tube	3034
4	Pressurization dip tube	3034-1
5	Label	3016-1
6	Hose	3014-1
7	gr 200 CO2 cartridge	3031
8	PELD base	3028
9	Safety pin	0285-1
	Safety pin seal	0285
	ABC powder	18462

EMME ANTINCENDIO S.r.l

Factory: Via del Molino, 40 – 52010 Corsalone (AR) – Italy – Tel. +39.0575.511320
Warehouse: Via G. Di Vittorio, 11 – 20017 Mazzo di Rho (MI) – Italy – Tel. +39.0293900399
E-mail: info@emme-italia.com – web site: www.emme-italia.com
P.IVA/ C.F. 11208251006 – R.E.A. FI-632545

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_24095	24095	25/10/17	M.R		1	2