



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

25064-1

6Kg Potassium Sulphate Powder FIRE EXTINGUISHER



- **CYLINDER**
Alloy steel, 3 pieces, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
Potassium Sulphate powder.
- **PROPELLANT**
Fire extinguisher pressurized at moment of use with gr.150 CO₂ cartridge .
- **VALVE**
Aluminum percussion valve M 74 x 2.
- **USE**
B C fire rating
(flammable liquids, flammable gas).
- **BRACKET**
Wall-mounted red painting and PELD base, in standard equipment.

© REPRODUCTION IS PROHIBITED

6Kg potassium sulphate powder fire extinguisher, pressurized at moment of use, temperature range from -30°C to +60°C, manufactured in accordance to EN 3-7, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving voltages of up to 1000 volts.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



233



25064-1


6Kg Potassium Sulphate Powder FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	233 B C
EXTINGUISHING AGENT	EPBC 2051 powder
PROPELLANT	Internal cartridge gr 150 CO ₂
TEMPERATURE RANGE	-30°C +60°C
NOMINAL CHARGE	6 Kg
FULL WEIGHT	~ 10,5 Kg
DIMENSIONS	Height 505 mm Diameter 150 mm
DISCHARGE TIME	19 sec.
MAX VALVE TIGHTENING	Between 35 and 45 Nm
CYLINDER PRESSURE TEST	PT 30 bar
CYLINDER VOLUME	6,7 L.
SAFETY VALVE	Set 24 +/- 2 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour


PACKAGING

STANDARD :
nr. 30 pieces for pallet 100x120
in single packaging

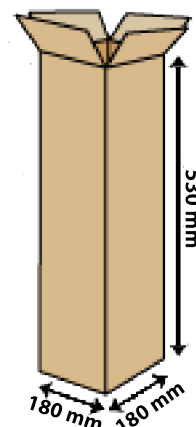

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the norm in use in utilization country.

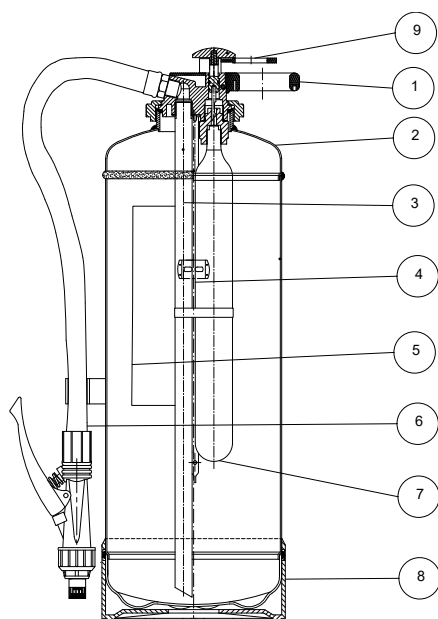

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M 74 X 2	3008-1
2	Cylinder	3011-1
3	PVC dip tube	3033
4	Pressurization dip tube	3033-1
5	Label	3015-2
6	Hose	3014
7	gr 150 CO ₂ cartridge	3030
8	PELD base	1862-6
9	Safety pin	0285-1
	Safety pin seal	0285
	BC powder	2051

EMME ANTINCENDIO S.r.l

Factory: Via del Molino, 40 – 52010 Corsalone (AR) – Italy – Tel. +39.0575.511320
Warehouse: Via G. Di Vittorio, 11 – 20017 Mazzo di Rho (MI) – Italy – Tel. +39.0293900399
E-mail: info@emme-italia.com – web site: www.emme-italia.com
P.IVA/ C.F. 11208251006 – R.E.A. FI-632545

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_25064-1	25064-1	30/10/17	M.R		1	2